

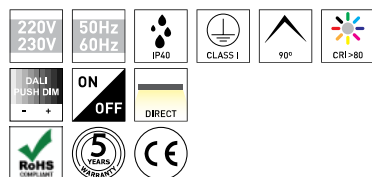
**DESCRIPTION**

ORIS 50 VE Surface OPAL CRI→80

<b>MOUNTING TYPE</b>	<b>SALIENTE</b>
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Anodized aluminium, Textured Black, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 186 lm/W
<b>CRI</b>	CRI→80
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**ICONOGRAPHY**

**TECHNICAL DRAWING**

**ORIS 50 VE SURFACE OPAL**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
850	20.4	AL, TB, TW	3000K	DA, NF	3616	2640	557XX.0809.830.FI
850	20.4	AL, TB, TW	4000K	DA, NF	3800	2774	557XX.0809.840.FI
1130	27.2	AL, TB, TW	3000K	DA, NF	4821	3520	557XX.1109.830.FI
1130	27.2	AL, TB, TW	4000K	DA, NF	5067	3699	557XX.1109.840.FI
1410	34.1	AL, TB, TW	3000K	DA, NF	6027	4400	557XX.1409.830.FI
1410	34.1	AL, TB, TW	4000K	DA, NF	6333	4623	557XX.1409.840.FI
1690	40.9	AL, TB, TW	3000K	DA, NF	7232	5280	557XX.1609.830.FI
1690	40.9	AL, TB, TW	4000K	DA, NF	7600	5548	557XX.1609.840.FI
1970	47.7	AL, TB, TW	3000K	DA, NF	8438	6159	557XX.1909.830.FI
1970	47.7	AL, TB, TW	4000K	DA, NF	8867	6473	557XX.1909.840.FI
2250	54.5	AL, TB, TW	3000K	DA, NF	9643	7039	557XX.2209.830.FI
2250	54.5	AL, TB, TW	4000K	DA, NF	10133	7397	557XX.2209.840.FI
2530	61.3	AL, TB, TW	3000K	DA, NF	10848	7919	557XX.2509.830.FI
2530	61.3	AL, TB, TW	4000K	DA, NF	11400	8322	557XX.2509.840.FI
2810	68.1	AL, TB, TW	3000K	DA, NF	12054	8799	557XX.2809.830.FI
2810	68.1	AL, TB, TW	4000K	DA, NF	12667	9247	557XX.2809.840.FI
3090	74.9	AL, TB, TW	3000K	DA, NF	13259	9679	557XX.3009.830.FI
3090	74.9	AL, TB, TW	4000K	DA, NF	13933	10171	557XX.3009.840.FI

 SELECT YOUR PREFERRED  
 OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

**ACCESSORIES**

Oris 50 Trimless Aces. -  
Oris 50 Trimless Aces. 8030-1400.2000

Plaster KIT 4 a 5 cm 4 - 5cm  
Plaster KIT 4 a 5 cm 80303058

Plaster KIT 0,7 a 2 cm 0.7 - 2.1cm  
Plaster KIT 0,7 a 2 cm 80303059