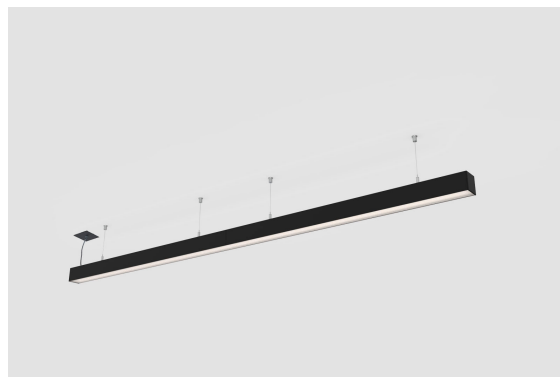



DESCRIPTION
ORIS 50 VE Suspended LINEAR SYSTEM MICROPRISMATIC CRI→80

MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	DALI / Switch Dim, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 190 lm/W
CRI	CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1


TECHNICAL DRAWING

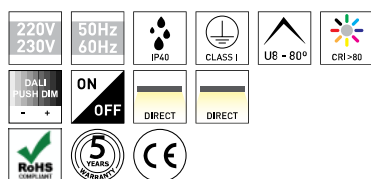ICONOGRAPHY

ORIS 50 VE SUSP. LS MICPR
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	22.4	AL, TB, TW	3000K	DA, NF	4054	3244	562XX.11P8.830.FI
1130	22.4	AL, TB, TW	4000K	DA, NF	4256	3405	562XX.11P8.840.FI
1410	28	AL, TB, TW	3000K	DA, NF	5068	4054	562XX.14P8.830.FI
1410	28	AL, TB, TW	4000K	DA, NF	5320	4256	562XX.14P8.840.FI
1690	33.6	AL, TB, TW	3000K	DA, NF	6082	4865	562XX.16P8.830.FI
1690	33.6	AL, TB, TW	4000K	DA, NF	6384	5107	562XX.16P8.840.FI
1970	39.2	AL, TB, TW	3000K	DA, NF	7095	5676	562XX.19P8.830.FI
1970	39.2	AL, TB, TW	4000K	DA, NF	7448	5958	562XX.19P8.840.FI
2250	44.8	AL, TB, TW	3000K	DA, NF	8109	6487	562XX.22P8.830.FI
2250	44.8	AL, TB, TW	4000K	DA, NF	8512	6810	562XX.22P8.840.FI
2530	50.4	AL, TB, TW	3000K	DA, NF	9122	7298	562XX.25P8.830.FI
2530	50.4	AL, TB, TW	4000K	DA, NF	9576	7661	562XX.25P8.840.FI
2810	56	AL, TB, TW	3000K	DA, NF	10136	8109	562XX.28P8.830.FI
2810	56	AL, TB, TW	4000K	DA, NF	10640	8512	562XX.28P8.840.FI
3090	61.6	AL, TB, TW	3000K	DA, NF	11150	8920	562XX.30P8.830.FI
3090	61.6	AL, TB, TW	4000K	DA, NF	11704	9363	562XX.30P8.840.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

ACCESSORIES

	Suspension Kit Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)	Silver 80303017.SL 80303018.SL 80303019.SL		
	Ceiling Rose Recessed Ceiling Rose Recessed	Textured White 80303020.TW	Textured Silver 80303020.TS	Textured Black 80303020.TB
	Ceiling Rose Surface Ceiling Rose Surface	Textured White 80303021.TW	Textured Silver 80303021.TS	Textured Black 80303021.TB



Power Cable 0,75
Power Cable 1.5m
Power Cable 3m
Power Cable 5m

ON/OFF

80303001
80303002
80303003

DALI Push

80303004
80303005
80303006



Joint ON/OFF ORIS 50
Joint ON/OFF ORIS 50

ON/OFF

80303071



Joint DALI ORIS 50
Joint DALI ORIS 50

DALI

80303073