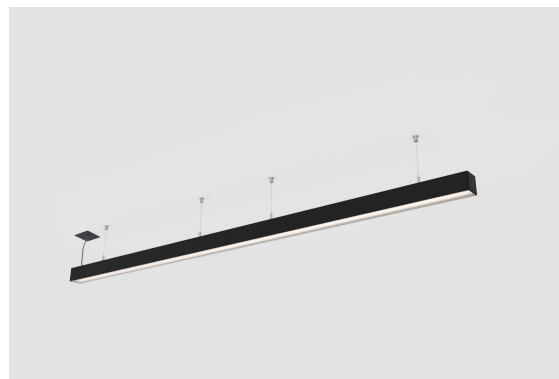
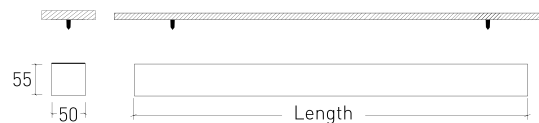
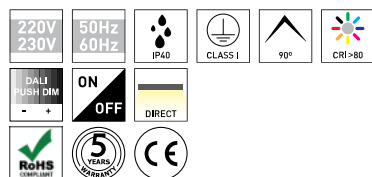


**DESCRIPTION**
**ORIS 50 VE Suspended LINEAR SYSTEM OPAL CRI→80**

<b>MOUNTING</b>	Suspension
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Anodized aluminium, Textured Black, Textured White
<b>CONTROL</b>	DALI / PUSH Dim, ON/OFF

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 186 lm/W
<b>CRI</b>	CRI→80
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1


**TECHNICAL DRAWING**

**ICONOGRAPHY**

**ORIS 50 VE SUSP. LS OPAL**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	27,2	AL, TB, TW	3000K	DA, NF	4821	3520	562XX.1109.830.FI
1130	27,2	AL, TB, TW	4000K	DA, NF	5067	3699	562XX.1109.840.FI
1410	34,1	AL, TB, TW	3000K	DA, NF	6027	4400	562XX.1409.830.FI
1410	34,1	AL, TB, TW	4000K	DA, NF	6333	4623	562XX.1409.840.FI
1690	40,9	AL, TB, TW	3000K	DA, NF	7232	5280	562XX.1609.830.FI
1690	40,9	AL, TB, TW	4000K	DA, NF	7600	5548	562XX.1609.840.FI
1970	47,7	AL, TB, TW	3000K	DA, NF	8438	6159	562XX.1909.830.FI
1970	47,7	AL, TB, TW	4000K	DA, NF	8867	6473	562XX.1909.840.FI
2250	54,5	AL, TB, TW	3000K	DA, NF	9643	7039	562XX.2209.830.FI
2250	54,5	AL, TB, TW	4000K	DA, NF	10133	7397	562XX.2209.840.FI
2530	61,3	AL, TB, TW	3000K	DA, NF	10848	7919	562XX.2509.830.FI
2530	61,3	AL, TB, TW	4000K	DA, NF	11400	8322	562XX.2509.840.FI
2810	68,1	AL, TB, TW	3000K	DA, NF	12054	8799	562XX.2809.830.FI
2810	68,1	AL, TB, TW	4000K	DA, NF	12667	9247	562XX.2809.840.FI
3090	74,9	AL, TB, TW	3000K	DA, NF	13259	9679	562XX.3009.830.FI
3090	74,9	AL, TB, TW	4000K	DA, NF	13933	10171	562XX.3009.840.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / PUSH Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

**ACCESSORIES**

	<b>Suspension Kit</b> Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)	Silver 80303017.SL 80303018.SL 80303019.SL		
	<b>Ceiling Rose Recessed</b> Ceiling Rose Recessed	Textured White 80303020.TW	Textured Silver 80303020.TS	Textured Black 80303020.TB
	<b>Ceiling Rose Surface</b> Ceiling Rose Surface	Textured White 80303021.TW	Textured Silver 80303021.TS	Textured Black 80303021.TB



Clear Power Cable  
Power Cable 1.5m  
Power Cable 3m  
Power Cable 5m

ON/OFF

80303001  
80303002  
80303003

DALI Push

80303004  
80303005  
80303006



Joint ON/OFF ORIS 50  
Joint ON/OFF ORIS 50

ON/OFF

80303071



Joint DALI ORIS 50  
Joint DALI ORIS 50

DALI

80303073