

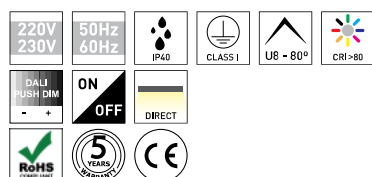
DESCRIPTION
ORIS 50 VE Suspended MICROPRISMATIC CRI→80

MOUNTING	Suspension
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	DALI / PUSH Dim, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 190 lm/W
CRI	CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1


TECHNICAL DRAWING

ICONOGRAPHY

ORIS 50 VE SUSP MICROPRIS
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	16,8	AL, TB, TW	3000K	DA, NF	3041	2433	559XX.08P8.830.FI
850	16,8	AL, TB, TW	4000K	DA, NF	3192	2554	559XX.08P8.840.FI
1130	22,4	AL, TB, TW	3000K	DA, NF	4054	3244	559XX.11P8.830.FI
1130	22,4	AL, TB, TW	4000K	DA, NF	4256	3405	559XX.11P8.840.FI
1410	28	AL, TB, TW	3000K	DA, NF	5068	4054	559XX.14P8.830.FI
1410	28	AL, TB, TW	4000K	DA, NF	5320	4256	559XX.14P8.840.FI
1690	33,6	AL, TB, TW	3000K	DA, NF	6082	4865	559XX.16P8.830.FI
1690	33,6	AL, TB, TW	4000K	DA, NF	6384	5107	559XX.16P8.840.FI
1970	39,2	AL, TB, TW	3000K	DA, NF	7095	5676	559XX.19P8.830.FI
1970	39,2	AL, TB, TW	4000K	DA, NF	7448	5958	559XX.19P8.840.FI
2250	44,8	AL, TB, TW	3000K	DA, NF	8109	6487	559XX.22P8.830.FI
2250	44,8	AL, TB, TW	4000K	DA, NF	8512	6810	559XX.22P8.840.FI
2530	50,4	AL, TB, TW	3000K	DA, NF	9122	7298	559XX.25P8.830.FI
2530	50,4	AL, TB, TW	4000K	DA, NF	9576	7661	559XX.25P8.840.FI
2810	56	AL, TB, TW	3000K	DA, NF	10136	8109	559XX.28P8.830.FI
2810	56	AL, TB, TW	4000K	DA, NF	10640	8512	559XX.28P8.840.FI
3090	61,6	AL, TB, TW	3000K	DA, NF	11150	8920	559XX.30P8.830.FI
3090	61,6	AL, TB, TW	4000K	DA, NF	11704	9363	559XX.30P8.840.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / PUSH Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

ACCESSORIES

	Suspension Kit	Silver		
	Suspension kit 1,5m (1un)	80303017.SL		
	Suspension kit 3 m (1un)	80303018.SL		
	Suspension kit 5 m (1un)	80303019.SL		
	Ceiling Rose Surface	Textured White	Textured Silver	Textured Black
	Ceiling Rose Surface	80303021.TW	80303021.TS	80303021.TB
	Power Cable 0,75	ON/OFF	DALI Push	
	Power Cable 1.5m	80303001	80303004	
	Power Cable 3m	80303002	80303005	
	Power Cable 5m	80303003	80303006	



Ceiling Rose Recessed
Ceiling Rose Recessed

Textured White Textured Silver Textured Black
80303020.TW 80303020.TS 80303020.TB