

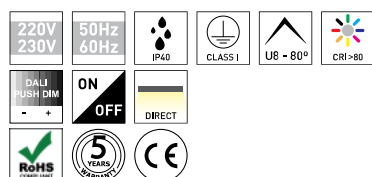
**DESCRIPTION**
**ORIS 50 VE Suspended MICROPRISMATIC CRI→80**

<b>MOUNTING</b>	Suspension
<b>DISTRIBUICAOLUZ</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Anodized aluminium, Textured Black, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 190 lm/W
<b>CRI</b>	CRI→80
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1


**TECHNICAL DRAWING**

**ICONOGRAPHY**

**ORIS 50 VE SUSP MICROPRIS**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	16.8	AL, TB, TW	3000K	DA, NF	3041	2433	559XX.08P8.830.FI
850	16.8	AL, TB, TW	4000K	DA, NF	3192	2554	559XX.08P8.840.FI
1130	22.4	AL, TB, TW	3000K	DA, NF	4054	3244	559XX.11P8.830.FI
1130	22.4	AL, TB, TW	4000K	DA, NF	4256	3405	559XX.11P8.840.FI
1410	28	AL, TB, TW	3000K	DA, NF	5068	4054	559XX.14P8.830.FI
1410	28	AL, TB, TW	4000K	DA, NF	5320	4256	559XX.14P8.840.FI
1690	33.6	AL, TB, TW	3000K	DA, NF	6082	4865	559XX.16P8.830.FI
1690	33.6	AL, TB, TW	4000K	DA, NF	6384	5107	559XX.16P8.840.FI
1970	39.2	AL, TB, TW	3000K	DA, NF	7095	5676	559XX.19P8.830.FI
1970	39.2	AL, TB, TW	4000K	DA, NF	7448	5958	559XX.19P8.840.FI
2250	44.8	AL, TB, TW	3000K	DA, NF	8109	6487	559XX.22P8.830.FI
2250	44.8	AL, TB, TW	4000K	DA, NF	8512	6810	559XX.22P8.840.FI
2530	50.4	AL, TB, TW	3000K	DA, NF	9122	7298	559XX.25P8.830.FI
2530	50.4	AL, TB, TW	4000K	DA, NF	9576	7661	559XX.25P8.840.FI
2810	56	AL, TB, TW	3000K	DA, NF	10136	8109	559XX.28P8.830.FI
2810	56	AL, TB, TW	4000K	DA, NF	10640	8512	559XX.28P8.840.FI
3090	61.6	AL, TB, TW	3000K	DA, NF	11150	8920	559XX.30P8.830.FI
3090	61.6	AL, TB, TW	4000K	DA, NF	11704	9363	559XX.30P8.840.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

**ACCESSORIES**

	<b>Suspension Kit</b>	<b>Silver</b>	
	Suspension kit 1,5m (1un)	80303017.SL	
	Suspension kit 3 m (1un)	80303018.SL	
	Suspension kit 5 m (1un)	80303019.SL	
	<b>Ceiling Rose Surface</b>	<b>Textured White</b>	<b>Textured Silver</b>
	Ceiling Rose Surface	80303021.TW	80303021.TS
			80303021.TB
	<b>Power Cable 0,75</b>	<b>ON/OFF</b>	<b>DALI Push</b>
	Power Cable 1.5m	80303001	80303004
	Power Cable 3m	80303002	80303005
	Power Cable 5m	80303003	80303006



Ceiling Rose Recessed  
Ceiling Rose Recessed

Textured White	Textured Silver	Textured Black
80303020.TW	80303020.TS	80303020.TB