

DESCRIPTION

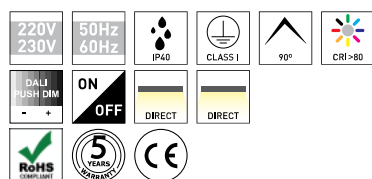
ORIS 50 VE Suspended OPAL CRI→80

MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	DALI / Switch Dim, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 186 lm/W
CRI	CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1


TECHNICAL DRAWING

ICONOGRAPHY

ORIS 50 VE SUSPENDED OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
850	20.4	AL, TB, TW	3000K	DA, NF	3616	2640	559XX.0809.830.FI
850	20.4	AL, TB, TW	4000K	DA, NF	3800	2774	559XX.0809.840.FI
1130	27.2	AL, TB, TW	3000K	DA, NF	4821	3520	559XX.1109.830.FI
1130	27.2	AL, TB, TW	4000K	DA, NF	5067	3699	559XX.1109.840.FI
1410	34.1	AL, TB, TW	3000K	DA, NF	6027	4400	559XX.1409.830.FI
1410	34.1	AL, TB, TW	4000K	DA, NF	6333	4623	559XX.1409.840.FI
1690	40.9	AL, TB, TW	3000K	DA, NF	7232	5280	559XX.1609.830.FI
1690	40.9	AL, TB, TW	4000K	DA, NF	7600	5548	559XX.1609.840.FI
1970	47.7	AL, TB, TW	3000K	DA, NF	8438	6159	559XX.1909.830.FI
1970	47.7	AL, TB, TW	4000K	DA, NF	8867	6473	559XX.1909.840.FI
2250	54.5	AL, TB, TW	3000K	DA, NF	9643	7039	559XX.2209.830.FI
2250	54.5	AL, TB, TW	4000K	DA, NF	10133	7397	559XX.2209.840.FI
2530	61.3	AL, TB, TW	3000K	DA, NF	10848	7919	559XX.2509.830.FI
2530	61.3	AL, TB, TW	4000K	DA, NF	11400	8322	559XX.2509.840.FI
2810	68.1	AL, TB, TW	3000K	DA, NF	12054	8799	559XX.2809.830.FI
2810	68.1	AL, TB, TW	4000K	DA, NF	12667	9247	559XX.2809.840.FI
3090	74.9	AL, TB, TW	3000K	DA, NF	13259	9679	559XX.3009.830.FI
3090	74.9	AL, TB, TW	4000K	DA, NF	13933	10171	559XX.3009.840.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

ACCESSORIES

	Suspension Kit	Silver	
	Suspension kit 1,5m (1un)	80303017.SL	
	Suspension kit 3 m (1un)	80303018.SL	
	Suspension kit 5 m (1un)	80303019.SL	
	Ceiling Rose Surface	Textured White	Textured Silver
	Ceiling Rose Surface	80303021.TW	80303021.TS
			Textured Black
			80303021.TB
	Power Cable 0,75	ON/Off	DALI Push
	Power Cable 1.5m	80303001	80303004
	Power Cable 3m	80303002	80303005
	Power Cable 5m	80303003	80303006



Ceiling Rose Recessed
Ceiling Rose Recessed

Textured White	Textured Silver	Textured Black
80303020.TW	80303020.TS	80303020.TB