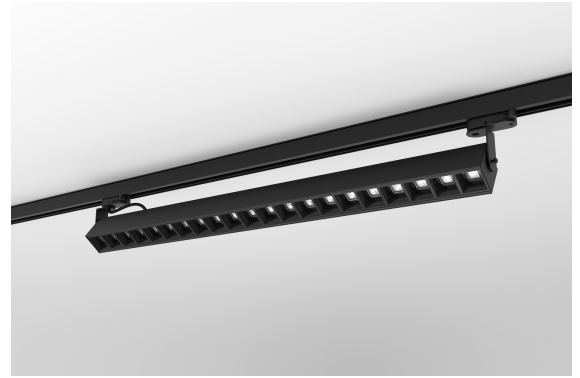


**DESCRIPTION**


Technical lighting is increasingly considered when designing spaces and the purpose for which they are intended, because each place has its own specificity and lighting needs.

The Wall Washer from the ORIS 50 range, with adapter for 230V universal track, was developed precisely to respond to one of these shortcomings, that of sweeping the wall with uniform and efficient light to highlight the products exhibited there.

<b>MOUNTING TYPE</b>	CALHAS
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	CASAMBI, DALI / Switch Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 155 lm/W
<b>CRI</b>	CRI->90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

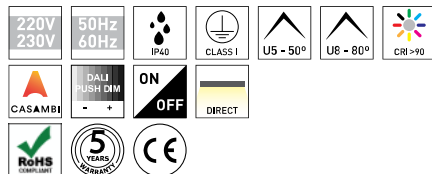**TECHNICAL DRAWING**
**ICONOGRAPHY**


**ORIS 50 WALL WASHER TRACK**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
290	7.8	TB, TW	CS, DA, NF	50, 80	1125	1069	3000K	120XX.02U5.930.FI
290	7.8	TB, TW	CS, DA, NF	50, 80	1125	1069	3000K	120XX.02U8.930.FI
290	7.8	TB, TW	CS, DA, NF	50, 80	1203	1143	4000K	120XX.02U5.940.FI
290	7.8	TB, TW	CS, DA, NF	50, 80	1203	1143	4000K	120XX.02U8.940.FI
570	15.5	TB, TW	CS, DA, NF	50, 80	2250	2138	3000K	120XX.05U5.930.FI
570	15.5	TB, TW	CS, DA, NF	50, 80	2250	2138	3000K	120XX.05U8.930.FI
570	15.5	TB, TW	CS, DA, NF	50, 80	2406	2285	4000K	120XX.05U5.940.FI
570	15.5	TB, TW	CS, DA, NF	50, 80	2406	2285	4000K	120XX.05U8.940.FI
850	23.3	TB, TW	CS, DA, NF	50, 80	3376	3207	3000K	120XX.08U5.930.FI
850	23.3	TB, TW	CS, DA, NF	50, 80	3376	3207	3000K	120XX.08U8.930.FI
850	23.3	TB, TW	CS, DA, NF	50, 80	3608	3428	4000K	120XX.08U5.940.FI
850	23.3	TB, TW	CS, DA, NF	50, 80	3608	3428	4000K	120XX.08U8.940.FI
1130	31	TB, TW	CS, DA, NF	50, 80	4501	4276	3000K	120XX.11U5.930.FI
1130	31	TB, TW	CS, DA, NF	50, 80	4501	4276	3000K	120XX.11U8.930.FI
1130	31	TB, TW	CS, DA, NF	50, 80	4811	4571	4000K	120XX.11U5.940.FI
1130	31	TB, TW	CS, DA, NF	50, 80	4811	4571	4000K	120XX.11U8.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	50°	50
DALI / Switch Dim	DA	Textured White	TW	80°	80
ON/OFF	NF				

**ACCESSORIES**

	Track ON/OFF Susp./Surf.	
	ON/OFF Track 1m Black	UP1459429-1
	ON/OFF Track 1m White	UP1459102-1
	ON/OFF Track 2m Black	UP1459429
	ON/OFF Track 2m White	UP1459102

	Track DALI Susp./Surf.	
	DALI Track 1m Black	UP1459439-1
	DALI Track 1m White	UP1459107-1
	DALI Track 2m Black	UP1459439
	DALI Track 2m White	UP1459107

Recess. Track ON/OFF



ON/OFF Rec. Track 1m BL  
ON/OFF Rec. Track 1m WH  
ON/OFF Rec. Track 2m BL  
ON/OFF Rec. Track 2m WH

UP1459312-1  
UP1459112-1  
UP1459312  
UP1459112



Recessed Track DALI  
DALI Rec. Track 1m BL  
DALI Rec. Track 1m WH  
DALI Rec. Track 2m BL  
DALI Rec. Track 2m WH

UP1459317-1  
UP1459117-1  
UP1459317  
UP1459117