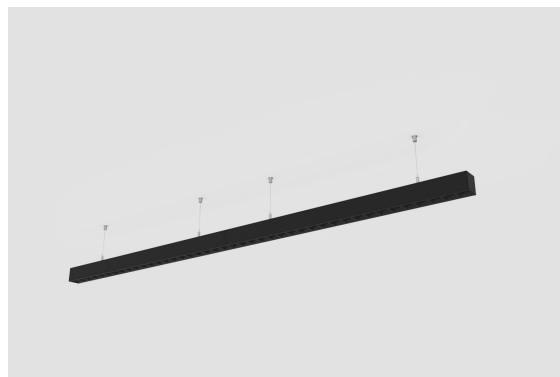


DESCRIPTION


In this section, you will find the product codes for modules designed to create continuous light lines of up to 50 metres, with invisible connections and a quick electrical and mechanical connection system, which simplifies installation and ensures a high-quality finish. It is possible to include 'L', 'T', 'X' or 'Y' connections whilst maintaining the uniformity of the line. It is not possible to combine different diffusers, projectors or lenses in this configuration. For customised solutions, please refer to the ORIS 50 MODULAR section.

MOUNTING	Suspension
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	DALI / PUSH Dim, ON/OFF, Tunable White


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 155 lm/W
CRI	CRI->90, Tunable White CRI->90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

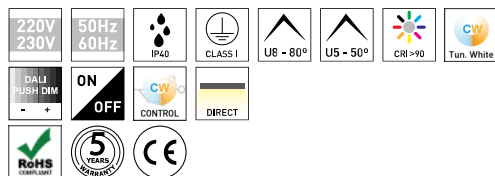ICONOGRAPHY

**ORIS 50 LS SUSPENDED LOW
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	31	TB, TW	3000K	DA, NF	4501	4276	108XX.11U5.930.FI
1130	31	TB, TW	3000K	DA, NF	4501	4276	108XX.11U8.930.FI
1130	31	TB, TW	4000K	DA, NF	4811	4571	108XX.11U5.940.FI
1130	31	TB, TW	4000K	DA, NF	4811	4571	108XX.11U8.940.FI
1410	38,8	TB, TW	3000K	DA, NF	5626	5345	108XX.14U5.930.FI
1410	38,8	TB, TW	3000K	DA, NF	5626	5345	108XX.14U8.930.FI
1410	38,8	TB, TW	4000K	DA, NF	6014	5713	108XX.14U5.940.FI
1410	38,8	TB, TW	4000K	DA, NF	6014	5713	108XX.14U8.940.FI
1690	46,6	TB, TW	3000K	DA, NF	6751	6414	108XX.16U5.930.FI
1690	46,6	TB, TW	3000K	DA, NF	6751	6414	108XX.16U8.930.FI
1690	46,6	TB, TW	4000K	DA, NF	7217	6856	108XX.16U5.940.FI
1690	46,6	TB, TW	4000K	DA, NF	7217	6856	108XX.16U8.940.FI
1970	54,3	TB, TW	3000K	DA, NF	7876	7483	108XX.19U5.930.FI
1970	54,3	TB, TW	3000K	DA, NF	7876	7483	108XX.19U8.930.FI
1970	54,3	TB, TW	4000K	DA, NF	8420	7999	108XX.19U5.940.FI
1970	54,3	TB, TW	4000K	DA, NF	8420	7999	108XX.19U8.940.FI
2250	62,1	TB, TW	3000K	DA, NF	9002	8552	108XX.22U5.930.FI
2250	62,1	TB, TW	3000K	DA, NF	9002	8552	108XX.22U8.930.FI
2250	62,1	TB, TW	4000K	DA, NF	9622	9141	108XX.22U5.940.FI
2250	62,1	TB, TW	4000K	DA, NF	9622	9141	108XX.22U8.940.FI
2530	69,8	TB, TW	3000K	DA, NF	10127	9620	108XX.25U5.930.FI
2530	69,8	TB, TW	3000K	DA, NF	10127	9620	108XX.25U8.930.FI
2530	69,8	TB, TW	4000K	DA, NF	10825	10284	108XX.25U5.940.FI
2530	69,8	TB, TW	4000K	DA, NF	10825	10284	108XX.25U8.940.FI
2810	77,6	TB, TW	3000K	DA, NF	11252	10689	108XX.28U5.930.FI
2810	77,6	TB, TW	3000K	DA, NF	11252	10689	108XX.28U8.930.FI
2810	77,6	TB, TW	4000K	DA, NF	12028	11427	108XX.28U5.940.FI
2810	77,6	TB, TW	4000K	DA, NF	12028	11427	108XX.28U8.940.FI
3090	85,4	TB, TW	3000K	DA, NF	12377	11758	108XX.30U5.930.FI
3090	85,4	TB, TW	3000K	DA, NF	12377	11758	108XX.30U8.930.FI
3090	85,4	TB, TW	4000K	DA, NF	13231	12569	108XX.30U5.940.FI
3090	85,4	TB, TW	4000K	DA, NF	13231	12569	108XX.30U8.940.FI

**SELECT YOUR PREFERRED
OPTION**

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / PUSH Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured White	TW


**ORIS 50 LS SUSPENDED LOW
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	23,9	TB, TW	2700K - 6500K	TU	3463	3289	108XX.11U5.92765.FI
1130	23,9	TB, TW	2700K - 6500K	TU	3463	3289	108XX.11U8.92765.FI
1410	29,9	TB, TW	2700K - 6500K	TU	4328	4112	108XX.14U5.92765.FI
1410	29,9	TB, TW	2700K - 6500K	TU	4328	4112	108XX.14U8.92765.FI
1690	35,8	TB, TW	2700K - 6500K	TU	5194	4934	108XX.16U5.92765.FI
1690	35,8	TB, TW	2700K - 6500K	TU	5194	4934	108XX.16U8.92765.FI
1970	41,8	TB, TW	2700K - 6500K	TU	6060	5757	108XX.19U5.92765.FI
1970	41,8	TB, TW	2700K - 6500K	TU	6060	5757	108XX.19U8.92765.FI
2250	47,8	TB, TW	2700K - 6500K	TU	6925	6579	108XX.22U5.92765.FI
2250	47,8	TB, TW	2700K - 6500K	TU	6925	6579	108XX.22U8.92765.FI
2530	53,7	TB, TW	2700K - 6500K	TU	7791	7401	108XX.25U5.92765.FI
2530	53,7	TB, TW	2700K - 6500K	TU	7791	7401	108XX.25U8.92765.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX
Tunable White	TU

COLOR TEMP.	CT
2700K - 6500K	92765

FINISHING	FI
Textured Black	TB
Textured White	TW

ACCESSORIES


Suspension Kit
Suspension kit 1,5m (1un) 80303017.SL
Suspension kit 3 m (1un) 80303018.SL
Suspension kit 5 m (1un) 80303019.SL

Silver



Ceiling Rose Recessed
Ceiling Rose Recessed
80303020.TW 80303020.TS 80303020.TB

Textured White

Textured Silver

Textured Black



Ceiling Rose Surface
Ceiling Rose Surface
80303021.TW 80303021.TS 80303021.TB

Textured White

Textured Silver

Textured Black



Clear Power Cable
Power Cable 1.5m 80303001 80303004
Power Cable 3m 80303002 80303005
Power Cable 5m 80303003 80303006

ON/OFF

DALI Push



Joint ON/OFF ORIS 50
Joint ON/OFF ORIS 50 80303071

ON/OFF



Joint DALI ORIS 50
Joint DALI ORIS 50 80303073

DALI