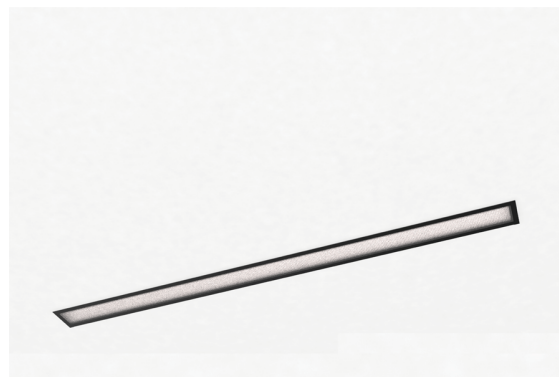



DESCRIPTION

A space only reveals its true charm with the right lighting. Being aware of this reality, Brilumen presents a LED profiles collection with a 5 Year Warranty, that will help you to create the desired environment. With different wattages, dimensions and mounting types, these profiles can be applied in numerous locations, such as stores, cinemas, museums, galleries, hotels, restaurants, meeting rooms, offices, lounges, etc. With Oris 50mm it's possible to mount light lines up to 5,05 meters without joining, with or without trims, add emergency kits with 1 or 3 hours of autonomy and choose white, black or aluminium as finishing colour. The LED profiles can also be configured in ON-OFF, Dimming 0-10VDC or with the advanced DALI PUSH DIM. Brilumen has also available the IES and LDT files for DIALux projects, providing technical assistance during the lighting project.

| | |
|---------------------------|--|
| MOUNTING TYPE | Encastrar |
| LIGHT DISTRIBUTION | Direct |
| POWER SUPPLY | 220-230V / 50-60 Hz |
| WARRANTY | 5 Years |
| FINISHING | Textured Black, Anodized aluminium, Textured White |
| CONTROL | DALI / Switch Dim, CASAMBI, ON/OFF, Tunable White |


TECHNICAL DRAWING
LED FEATURES

| | |
|-----------------------------|------------------------------|
| LUMINOUS EFFICIENCY | UP TO 201 lm/W |
| CRI | CRI→90, Tunable White CRI→90 |
| LIFESPAN | 50.000 Hours |
| STEPS MACADAM | 3 Steps MacAdam |
| LUMEN MAINTENANCE | L90/B50 |
| PHOTOBIOLOGICAL RISK | RG1 |

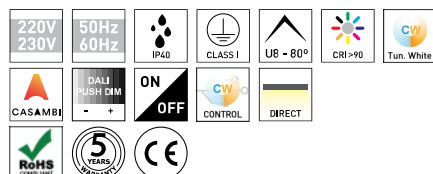
ICONOGRAPHY

**ORIS 50MM PRISMATIC
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

| LENGTH | POWER | FINISHING | COLOR TEMP. | CONTROL TYPE | LED LUMENS | LUMINAIRE LM | CODE |
|--------|-------|------------|-------------|--------------|------------|--------------|--------------------|
| 850 | 16.8 | AL, TB, TW | 3000K | CS, DA, NF | 3192 | 2554 | 5174XX.08P8.930.FI |
| 850 | 16.8 | AL, TB, TW | 4000K | CS, DA, NF | 3377 | 2701 | 5174XX.08P8.940.FI |
| 1130 | 22.4 | AL, TB, TW | 3000K | CS, DA, NF | 4256 | 3405 | 5174XX.11P8.930.FI |
| 1130 | 22.4 | AL, TB, TW | 4000K | CS, DA, NF | 4502 | 3602 | 5174XX.11P8.940.FI |
| 1410 | 28 | AL, TB, TW | 3000K | CS, DA, NF | 5320 | 4256 | 5174XX.14P8.930.FI |
| 1410 | 28 | AL, TB, TW | 4000K | CS, DA, NF | 5628 | 4502 | 5174XX.14P8.940.FI |
| 1690 | 33.6 | AL, TB, TW | 3000K | CS, DA, NF | 6384 | 5107 | 5174XX.16P8.930.FI |
| 1690 | 33.6 | AL, TB, TW | 4000K | CS, DA, NF | 6754 | 5403 | 5174XX.16P8.940.FI |
| 1970 | 39.2 | AL, TB, TW | 3000K | CS, DA, NF | 7448 | 5958 | 5174XX.19P8.930.FI |
| 1970 | 39.2 | AL, TB, TW | 4000K | CS, DA, NF | 7879 | 6303 | 5174XX.19P8.940.FI |
| 2250 | 44.8 | AL, TB, TW | 3000K | CS, DA, NF | 8512 | 6810 | 5174XX.22P8.930.FI |
| 2250 | 44.8 | AL, TB, TW | 4000K | CS, DA, NF | 9005 | 7204 | 5174XX.22P8.940.FI |
| 2530 | 50.4 | AL, TB, TW | 3000K | CS, DA, NF | 9576 | 7661 | 5174XX.25P8.930.FI |
| 2530 | 50.4 | AL, TB, TW | 4000K | CS, DA, NF | 10130 | 8104 | 5174XX.25P8.940.FI |
| 2810 | 56 | AL, TB, TW | 3000K | CS, DA, NF | 10640 | 8512 | 5174XX.28P8.930.FI |
| 2810 | 56 | AL, TB, TW | 4000K | CS, DA, NF | 11256 | 9005 | 5174XX.28P8.940.FI |
| 3090 | 61.6 | AL, TB, TW | 3000K | CS, DA, NF | 11704 | 9363 | 5174XX.30P8.930.FI |
| 3090 | 61.6 | AL, TB, TW | 4000K | CS, DA, NF | 12382 | 9905 | 5174XX.30P8.940.FI |
| 3370 | 67.2 | AL, TB, TW | 3000K | CS, DA, NF | 12768 | 10214 | 5174XX.33P8.930.FI |
| 3370 | 67.2 | AL, TB, TW | 4000K | CS, DA, NF | 13507 | 10806 | 5174XX.33P8.940.FI |
| 3930 | 78.4 | AL, TB, TW | 3000K | CS, DA, NF | 14896 | 11917 | 5174XX.39P8.930.FI |
| 3930 | 78.4 | AL, TB, TW | 4000K | CS, DA, NF | 15758 | 12607 | 5174XX.39P8.940.FI |
| 4490 | 89.6 | AL, TB, TW | 3000K | CS, DA, NF | 17024 | 13619 | 5174XX.44P8.930.FI |
| 4490 | 89.6 | AL, TB, TW | 4000K | CS, DA, NF | 18010 | 14408 | 5174XX.44P8.940.FI |
| 5050 | 100.8 | AL, TB, TW | 3000K | CS, DA, NF | 19152 | 15322 | 5174XX.50P8.930.FI |
| 5050 | 100.8 | AL, TB, TW | 4000K | CS, DA, NF | 20261 | 16209 | 5174XX.50P8.940.FI |

SELECT YOUR PREFERRED
OPTION

| CONTROL TYPE | XX | COLOR TEMP. | CT | FINISHING | FI |
|-------------------|----|-------------|----|--------------------|----|
| CASAMBI | CS | 3000K | 30 | Anodized aluminium | AL |
| DALI / Switch Dim | DA | 4000K | 40 | Textured Black | TB |
| ON/OFF | NF | | | Textured White | TW |


**ORIS 50MM PRISMATIC
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90**

| LENGTH | POWER | FINISHING | COLOR TEMP. | CONTROL TYPE | LED LUMENS | LUMINAIRE LM | CODE |
|--------|-------|------------|---------------|--------------|------------|--------------|-------------------------|
| 850 | 25.2 | AL, TB, TW | 2700K - 6500K | TU | 3175 | 2540 | 5174XX.08P8.92765.F |
| 1130 | 33.6 | AL, TB, TW | 2700K - 6500K | TU | 4234 | 3387 | 5174XX.11P8.92765.F |
| 1410 | 42 | AL, TB, TW | 2700K - 6500K | TU | 5292 | 4234 | 5174XX.14P8.92765.F |
| 1690 | 50.4 | AL, TB, TW | 2700K - 6500K | TU | 6350 | 5080 | 5174XX.16P8.92765.F |
| 1970 | 58.8 | AL, TB, TW | 2700K - 6500K | TU | 7409 | 5927 | 5174XX.19P8.92765.F |
| 2250 | 67.2 | AL, TB, TW | 2700K - 6500K | TU | 8467 | 6774 | 5174XX.22P8.92765.F |
| 2530 | 75.6 | AL, TB, TW | 2700K - 6500K | TU | 9526 | 7620 | 5174XX.25P8.92765.F |
| 2810 | 84 | AL, TB, TW | 2700K - 6500K | TU | 10584 | 8467 | 5174XX.28P8.92765.F |
| 3090 | 92.4 | AL, TB, TW | 2700K - 6500K | TU | 11642 | 9314 | 5174XX.30P8.92765.F |
| 3370 | 100.8 | AL, TB, TW | 2700K - 6500K | TU | 12701 | 10161 | 5174XX.33P8.92765.F |
| 3930 | 117.6 | AL, TB, TW | 2700K - 6500K | TU | 14818 | 11854 | 5174XX.39P8.92765.F |
| 4490 | 134.4 | AL, TB, TW | 2700K - 6500K | TU | 16934 | 13548 | 5174XX.44P8.92765.F |
| 5050 | 151.2 | AL, TB, TW | 2700K - 6500K | TU | 19051 | 15241 | 5174XX.50P8.92765.F |

SELECT YOUR PREFERRED
OPTION

| CONTROL TYPE | XX |
|---------------|----|
| Tunable White | TU |

| COLOR TEMP. | CT |
|---------------|-------|
| 2700K - 6500K | 92765 |

| FINISHING | FI |
|--------------------|----|
| Anodized aluminium | AL |
| Textured Black | TB |
| Textured White | TW |