

DESCRIPTION

This section contains the product codes for modules designed to create continuous light lines up to 50 meters, featuring invisible joints and a quick electrical and mechanical connection system that simplifies installation and ensures a clean, professional finish.

You can include "L", "T", "X" or "Y" connectors, while maintaining a uniform line.

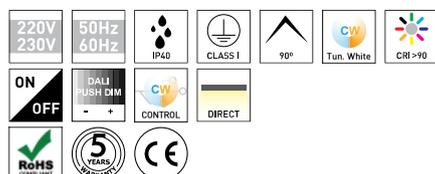
It is not possible to combine different diffusers, lenses or spotlights in this configuration. For customized solutions, please refer to the ORIS 50 MODULAR section.

| | |
|---------------------------|----------------------------------------------------|
| MOUNTING TYPE | Saliente |
| LIGHT DISTRIBUTION | Direct |
| POWER SUPPLY | 220-230V / 50-60 Hz |
| WARRANTY | 5 Years |
| FINISHING | Anodized aluminium, Textured Black, Textured White |
| CONTROL | DALI / Switch Dim, ON/OFF, Tunable White |


LED FEATURES

| | |
|-----------------------------|--------------------------------|
| LUMINOUS EFFICIENCY | UP TO 196 lm/W |
| CRI | CRI->90, Tunable White CRI->90 |
| LIFESPAN | 50.000 Hours |
| STEPS MACADAM | 3 Steps MacAdam |
| LUMEN MAINTENANCE | L90/B50 |
| PHOTOBIOLOGICAL RISK | RG1 |

TECHNICAL DRAWING

ICONOGRAPHY

ORIS 50 LS SURFACE OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

| LENGTH | POWER | FINISHING | COLOR TEMP. | CONTROL TYPE | LED LUMENS | LUMINAIRE LM | CODE |
|--------|-------|------------|-------------|--------------|------------|--------------|-------------------|
| 1130 | 27.1 | AL, TB, TW | 3000K | DA, NF | 5017 | 3663 | 103XX.1109.930.FI |
| 1130 | 27.1 | AL, TB, TW | 4000K | DA, NF | 5316 | 3880 | 103XX.1109.940.FI |
| 1410 | 33.9 | AL, TB, TW | 3000K | DA, NF | 6272 | 4578 | 103XX.1409.930.FI |
| 1410 | 33.9 | AL, TB, TW | 4000K | DA, NF | 6644 | 4850 | 103XX.1409.940.FI |
| 1690 | 40.7 | AL, TB, TW | 3000K | DA, NF | 7526 | 5494 | 103XX.1609.930.FI |
| 1690 | 40.7 | AL, TB, TW | 4000K | DA, NF | 7973 | 5820 | 103XX.1609.940.FI |
| 1970 | 47.5 | AL, TB, TW | 3000K | DA, NF | 8780 | 6409 | 103XX.1909.930.FI |
| 1970 | 47.5 | AL, TB, TW | 4000K | DA, NF | 9302 | 6791 | 103XX.1909.940.FI |
| 2250 | 54.2 | AL, TB, TW | 3000K | DA, NF | 10034 | 7325 | 103XX.2209.930.FI |
| 2250 | 54.2 | AL, TB, TW | 4000K | DA, NF | 10631 | 7761 | 103XX.2209.940.FI |
| 2530 | 61 | AL, TB, TW | 3000K | DA, NF | 11289 | 8241 | 103XX.2509.930.FI |
| 2530 | 61 | AL, TB, TW | 4000K | DA, NF | 11960 | 8731 | 103XX.2509.940.FI |
| 2810 | 67.8 | AL, TB, TW | 3000K | DA, NF | 12543 | 9156 | 103XX.2809.930.FI |
| 2810 | 67.8 | AL, TB, TW | 4000K | DA, NF | 13289 | 9701 | 103XX.2809.940.FI |
| 3090 | 74.6 | AL, TB, TW | 3000K | DA, NF | 13797 | 10072 | 103XX.3009.930.FI |
| 3090 | 74.6 | AL, TB, TW | 4000K | DA, NF | 14618 | 10671 | 103XX.3009.940.FI |

SELECT YOUR PREFERRED OPTION

| CONTROL TYPE | XX | COLOR TEMP. | CT | FINISHING | FI |
|-------------------|----|-------------|----|--------------------|----|
| DALI / Switch Dim | DA | 3000K | 30 | Anodized aluminium | AL |
| ON/OFF | NF | 4000K | 40 | Textured Black | TB |
| | | | | Textured White | TW |


ORIS 50 LS SURFACE OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90

| LENGTH | POWER | FINISHING | COLOR TEMP. | CONTROL TYPE | LED LUMENS | LUMINAIRE LM | CODE |
|--------|-------|------------|---------------|--------------|------------|--------------|---------------------|
| 1130 | 33.6 | AL, TB, TW | 2700K - 6500K | TU | 4234 | 3091 | 103XX.1109.92765.FI |
| 1410 | 42 | AL, TB, TW | 2700K - 6500K | TU | 5292 | 3863 | 103XX.1409.92765.FI |
| 1690 | 50.4 | AL, TB, TW | 2700K - 6500K | TU | 6350 | 4636 | 103XX.1609.92765.FI |
| 1970 | 58.8 | AL, TB, TW | 2700K - 6500K | TU | 7409 | 5408 | 103XX.1909.92765.FI |
| 2250 | 67.2 | AL, TB, TW | 2700K - 6500K | TU | 8467 | 6181 | 103XX.2209.92765.FI |
| 2530 | 75.6 | AL, TB, TW | 2700K - 6500K | TU | 9526 | 6954 | 103XX.2509.92765.FI |
| 2810 | 84 | AL, TB, TW | 2700K - 6500K | TU | 10584 | 7726 | 103XX.2809.92765.FI |
| 3090 | 92.4 | AL, TB, TW | 2700K - 6500K | TU | 11642 | 8499 | 103XX.3009.92765.FI |

SELECT YOUR PREFERRED
 OPTION

| CONTROL TYPE | XX |
|---------------|----|
| Tunable White | TU |

| COLOR TEMP. | CT |
|---------------|-------|
| 2700K - 6500K | 92765 |

| FINISHING | FI |
|--------------------|----|
| Anodized aluminium | AL |
| Textured Black | TB |
| Textured White | TW |