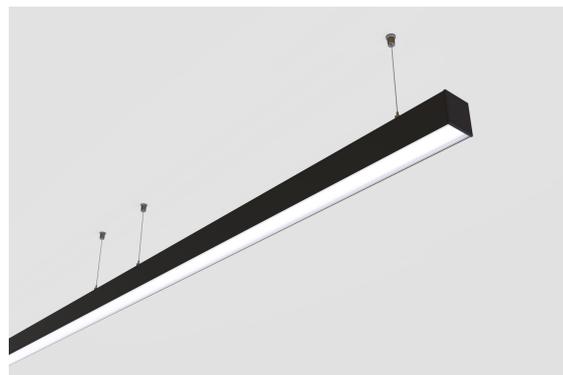



**DESCRIPTION**

This section contains the product codes for modules designed to create continuous light lines up to 50 meters, featuring invisible joints and a quick electrical and mechanical connection system that simplifies installation and ensures a clean, professional finish. You can include "L", "T", "X" or "Y" connectors, while maintaining a uniform line. It is not possible to combine different diffusers, lenses or spotlights in this configuration. For customized solutions, please refer to the ORIS 50 MODULAR section.

<b>MOUNTING TYPE</b>	Suspension
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Anodized aluminium, Textured Black, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF, Tunable White


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 196 lm/W
<b>CRI</b>	CRI->90, Tunable White CRI->90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

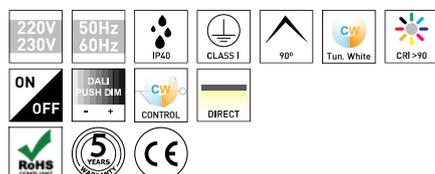**ICONOGRAPHY**

**ORIS 50 LS SUSP. OPAL**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	27.1	AL, TB, TW	3000K	DA, NF	5017	3663	105XX.1109.930.FI
1130	27.1	AL, TB, TW	4000K	DA, NF	5316	3880	105XX.1109.940.FI
1410	33.9	AL, TB, TW	3000K	DA, NF	6272	4578	105XX.1409.930.FI
1410	33.9	AL, TB, TW	4000K	DA, NF	6644	4850	105XX.1409.940.FI
1690	40.7	AL, TB, TW	3000K	DA, NF	7526	5494	105XX.1609.930.FI
1690	40.7	AL, TB, TW	4000K	DA, NF	7973	5820	105XX.1609.940.FI
1970	47.5	AL, TB, TW	3000K	DA, NF	8780	6409	105XX.1909.930.FI
1970	47.5	AL, TB, TW	4000K	DA, NF	9302	6791	105XX.1909.940.FI
2250	54.2	AL, TB, TW	3000K	DA, NF	10034	7325	105XX.2209.930.FI
2250	54.2	AL, TB, TW	4000K	DA, NF	10631	7761	105XX.2209.940.FI
2530	61	AL, TB, TW	3000K	DA, NF	11289	8241	105XX.2509.930.FI
2530	61	AL, TB, TW	4000K	DA, NF	11960	8731	105XX.2509.940.FI
2810	67.8	AL, TB, TW	3000K	DA, NF	12543	9156	105XX.2809.930.FI
2810	67.8	AL, TB, TW	4000K	DA, NF	13289	9701	105XX.2809.940.FI
3090	74.6	AL, TB, TW	3000K	DA, NF	13797	10072	105XX.3009.930.FI
3090	74.6	AL, TB, TW	4000K	DA, NF	14618	10671	105XX.3009.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW


**ORIS 50 LS SUSP. OPAL**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	33.6	AL, TB, TW	2700K - 6500K	TU	4234	3091	105XX.1109.92765.FI
1410	42	AL, TB, TW	2700K - 6500K	TU	5292	3863	105XX.1409.92765.FI
1690	50.4	AL, TB, TW	2700K - 6500K	TU	6350	4636	105XX.1609.92765.FI
1970	58.8	AL, TB, TW	2700K - 6500K	TU	7409	5408	105XX.1909.92765.FI
2250	67.2	AL, TB, TW	2700K - 6500K	TU	8467	6181	105XX.2209.92765.FI
2530	75.6	AL, TB, TW	2700K - 6500K	TU	9526	6954	105XX.2509.92765.FI
2810	84	AL, TB, TW	2700K - 6500K	TU	10584	7726	105XX.2809.92765.FI
3090	92.4	AL, TB, TW	2700K - 6500K	TU	11642	8499	105XX.3009.92765.FI

**SELECT YOUR PREFERRED  
OPTION**

CONTROL TYPE	XX
Tunable White	TU

COLOR TEMP.	CT
2700K - 6500K	92765

FINISHING	FI
Anodized aluminium	AL
Textured Black	TB
Textured White	TW