

**DESCRIPTION**

A space only reveals its true charm with the right lighting. Being aware of this reality, Brilumen presents a LED profiles collection with a 5 Year Warranty, that will help you to create the desired environment. With different wattages, dimensions and mounting types, these profiles can be applied in numerous locations, such as stores, cinemas, museums, galleries, hotels, restaurants, meeting rooms, offices, lounges, etc. With Oris 50mm it's possible to mount light lines up to 3,09 meters without joining, with or without trims, add emergency kits with 1 or 3 hours of autonomy and choose white, black or aluminium as finishing colour. The LED profiles can also be configured in ON-OFF, Dimming 0-10VDC or with the advanced DALI PUSH DIM. Brilumen has also available the IES and LDT files for DIALux projects, providing technical assistance during the lighting project.


|                           |   |
|---------------------------|---|
| <b>MOUNTING TYPE</b>      | Suspension  |
| <b>LIGHT DISTRIBUTION</b> | Direct  |
| <b>POWER SUPPLY</b>       | 220-230V / 50-60 Hz                               |
| <b>WARRANTY</b>           | 5 Years   |
| <b>FINISHING</b>          | Textured Black, Textured White                    |
| <b>CONTROL</b>            | DALI / Switch Dim, CASAMBI, ON/OFF, Tunable White |



**LED FEATURES**

|                             |                              |
|-----------------------------|------------------------------|
| <b>LUMINOUS EFFICIENCY</b>  | UP TO 155 lm/W               |
| <b>CRI</b>                  | CRI→90, Tunable White CRI→90 |
| <b>LIFESPAN</b>             | 50.000 Hours                 |
| <b>STEPS MACADAM</b>        | 3 Steps MacAdam              |
| <b>LUMEN MAINTENANCE</b>    | L90/B50                      |
| <b>PHOTOBIOLOGICAL RISK</b> | RG1                          |

**TECHNICAL DRAWING**

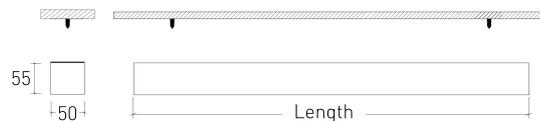

**ICONOGRAPHY**

|  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |



ORIS 50MM LOW GLARE  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

| LENGTH | POWER | FINISHING | COLOR TEMP. | CONTROL TYPE | LED LUMENS | LUMINAIRE LM | CODE               |
|--------|-------|-----------|-------------|--------------|------------|--------------|--------------------|
| 850    | 23.3  | TB, TW    | 3000K       | CS, DA, NF   | 3376       | 3207         | 5218XX.08U5.930.FI |
| 850    | 23.3  | TB, TW    | 3000K       | CS, DA, NF   | 3376       | 3207         | 5218XX.08U8.930.FI |
| 850    | 23.3  | TB, TW    | 4000K       | CS, DA, NF   | 3608       | 3428         | 5218XX.08U5.940.FI |
| 850    | 23.3  | TB, TW    | 4000K       | CS, DA, NF   | 3608       | 3428         | 5218XX.08U8.940.FI |
| 1130   | 31    | TB, TW    | 3000K       | CS, DA, NF   | 4501       | 4276         | 5218XX.11U5.930.FI |
| 1130   | 31    | TB, TW    | 3000K       | CS, DA, NF   | 4501       | 4276         | 5218XX.11U8.930.FI |
| 1130   | 31    | TB, TW    | 4000K       | CS, DA, NF   | 4811       | 4571         | 5218XX.11U5.940.FI |
| 1130   | 31    | TB, TW    | 4000K       | CS, DA, NF   | 4811       | 4571         | 5218XX.11U8.940.FI |
| 1410   | 38.8  | TB, TW    | 3000K       | CS, DA, NF   | 5626       | 5345         | 5218XX.14U5.930.FI |
| 1410   | 38.8  | TB, TW    | 3000K       | CS, DA, NF   | 5626       | 5345         | 5218XX.14U8.930.FI |
| 1410   | 38.8  | TB, TW    | 4000K       | CS, DA, NF   | 6014       | 5713         | 5218XX.14U5.940.FI |
| 1410   | 38.8  | TB, TW    | 4000K       | CS, DA, NF   | 6014       | 5713         | 5218XX.14U8.940.FI |
| 1690   | 46.6  | TB, TW    | 3000K       | CS, DA, NF   | 6751       | 6414         | 5218XX.16U5.930.FI |
| 1690   | 46.6  | TB, TW    | 3000K       | CS, DA, NF   | 6751       | 6414         | 5218XX.16U8.930.FI |
| 1690   | 46.6  | TB, TW    | 4000K       | CS, DA, NF   | 7217       | 6856         | 5218XX.16U5.940.FI |
| 1690   | 46.6  | TB, TW    | 4000K       | CS, DA, NF   | 7217       | 6856         | 5218XX.16U8.940.FI |
| 1970   | 54.3  | TB, TW    | 3000K       | CS, DA, NF   | 7876       | 7483         | 5218XX.19U5.930.FI |
| 1970   | 54.3  | TB, TW    | 3000K       | CS, DA, NF   | 7876       | 7483         | 5218XX.19U8.930.FI |
| 1970   | 54.3  | TB, TW    | 4000K       | CS, DA, NF   | 8420       | 7999         | 5218XX.19U5.940.FI |
| 1970   | 54.3  | TB, TW    | 4000K       | CS, DA, NF   | 8420       | 7999         | 5218XX.19U8.940.FI |
| 2250   | 62.1  | TB, TW    | 3000K       | CS, DA, NF   | 9002       | 8552         | 5218XX.22U5.930.FI |
| 2250   | 62.1  | TB, TW    | 3000K       | CS, DA, NF   | 9002       | 8552         | 5218XX.22U8.930.FI |
| 2250   | 62.1  | TB, TW    | 4000K       | CS, DA, NF   | 9622       | 9141         | 5218XX.22U5.940.FI |
| 2250   | 62.1  | TB, TW    | 4000K       | CS, DA, NF   | 9622       | 9141         | 5218XX.22U8.940.FI |
| 2530   | 69.8  | TB, TW    | 3000K       | CS, DA, NF   | 10127      | 9620         | 5218XX.25U5.930.FI |
| 2530   | 69.8  | TB, TW    | 3000K       | CS, DA, NF   | 10127      | 9620         | 5218XX.25U8.930.FI |
| 2530   | 69.8  | TB, TW    | 4000K       | CS, DA, NF   | 10825      | 10284        | 5218XX.25U5.940.FI |
| 2530   | 69.8  | TB, TW    | 4000K       | CS, DA, NF   | 10825      | 10284        | 5218XX.25U8.940.FI |
| 2810   | 77.6  | TB, TW    | 3000K       | CS, DA, NF   | 11252      | 10689        | 5218XX.28U5.930.FI |
| 2810   | 77.6  | TB, TW    | 3000K       | CS, DA, NF   | 11252      | 10689        | 5218XX.28U8.930.FI |
| 2810   | 77.6  | TB, TW    | 4000K       | CS, DA, NF   | 12028      | 11427        | 5218XX.28U5.940.FI |
| 2810   | 77.6  | TB, TW    | 4000K       | CS, DA, NF   | 12028      | 11427        | 5218XX.28U8.940.FI |
| 3090   | 85.4  | TB, TW    | 3000K       | CS, DA, NF   | 12377      | 11758        | 5218XX.30U5.930.FI |
| 3090   | 85.4  | TB, TW    | 3000K       | CS, DA, NF   | 12377      | 11758        | 5218XX.30U8.930.FI |
| 3090   | 85.4  | TB, TW    | 4000K       | CS, DA, NF   | 13231      | 12569        | 5218XX.30U5.940.FI |
| 3090   | 85.4  | TB, TW    | 4000K       | CS, DA, NF   | 13231      | 12569        | 5218XX.30U8.940.FI |

SELECT YOUR PREFERRED  
OPTION

| CONTROL TYPE             | XX       | COLOR TEMP. | CT | FINISHING      | FI |
|--------------------------|----------|-------------|----|----------------|----|
| CASAMBI                  | CS       | 3000K       | 30 | Textured Black | TB |
| DALI / Switch Dim ON/OFF | DA<br>NF | 4000K       | 40 | Textured White | TW |



ORIS 50MM LOW GLARE  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90

| LENGTH | POWER | FINISHING | COLOR TEMP.   | CONTROL TYPE | LED LUMENS | LUMINAIRE LM | CODE                |
|--------|-------|-----------|---------------|--------------|------------|--------------|---------------------|
| 850    | 17.9  | TB, TW    | 2700K - 6500K | TU           | 2597       | 2467         | 218XX.08U5.92765.FI |
| 850    | 17.9  | TB, TW    | 2700K - 6500K | TU           | 2597       | 2467         | 218XX.08U8.92765.FI |
| 1130   | 23.9  | TB, TW    | 2700K - 6500K | TU           | 3463       | 3289         | 218XX.11U5.92765.FI |
| 1130   | 23.9  | TB, TW    | 2700K - 6500K | TU           | 3463       | 3289         | 218XX.11U8.92765.FI |
| 1410   | 29.9  | TB, TW    | 2700K - 6500K | TU           | 4328       | 4112         | 218XX.14U5.92765.FI |
| 1410   | 29.9  | TB, TW    | 2700K - 6500K | TU           | 4328       | 4112         | 218XX.14U8.92765.FI |
| 1690   | 35.8  | TB, TW    | 2700K - 6500K | TU           | 5194       | 4934         | 218XX.16U5.92765.FI |
| 1690   | 35.8  | TB, TW    | 2700K - 6500K | TU           | 5194       | 4934         | 218XX.16U8.92765.FI |
| 1970   | 41.8  | TB, TW    | 2700K - 6500K | TU           | 6060       | 5757         | 218XX.19U5.92765.FI |
| 1970   | 41.8  | TB, TW    | 2700K - 6500K | TU           | 6060       | 5757         | 218XX.19U8.92765.FI |
| 2250   | 47.8  | TB, TW    | 2700K - 6500K | TU           | 6925       | 6579         | 218XX.22U5.92765.FI |
| 2250   | 47.8  | TB, TW    | 2700K - 6500K | TU           | 6925       | 6579         | 218XX.22U8.92765.FI |
| 2530   | 53.7  | TB, TW    | 2700K - 6500K | TU           | 7791       | 7401         | 218XX.25U5.92765.FI |
| 2530   | 53.7  | TB, TW    | 2700K - 6500K | TU           | 7791       | 7401         | 218XX.25U8.92765.FI |

SELECT YOUR PREFERRED  
OPTION

| CONTROL TYPE  | XX | COLOR TEMP.   | CT    | FINISHING      | FI |
|---------------|----|---------------|-------|----------------|----|
| Tunable White | TU | 2700K - 6500K | 92765 | Textured Black | TB |
|               |    |               |       | Textured White | TW |

ACCESSORIES



Suspension Kit  
Suspension kit 1,5m (1un)  
Suspension kit 3 m (1un)  
Suspension kit 5 m (1un)

Silver  
80303017.SL  
80303018.SL  
80303019.SL

|   |  |  |   |                               |
|---|--|--|---|-------------------------------|
|  | Ceiling Rose Recessed<br>Ceiling Rose Recessed                           | Textured White<br>80303020.TW              | Textured Silver<br>80303020.TS                | Textured Black<br>80303020.TB |
|  | Ceiling Rose Surface<br>Ceiling Rose Surface                             | Textured White<br>80303021.TW              | Textured Silver<br>80303021.TS                | Textured Black<br>80303021.TB |
|   | Power Cable 0,75<br>Power Cable 1.5m<br>Power Cable 3m<br>Power Cable 5m | ON/OFF<br>80303001<br>80303002<br>80303003 | DALI Push<br>80303004<br>80303005<br>80303006 |                               |