


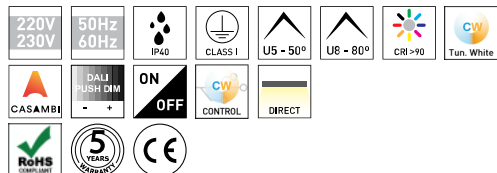
**DESCRIPTION**

A space only reveals its true charm with the right lighting. Being aware of this reality, Brilumen presents a LED profiles collection with a 5 Year Warranty, that will help you to create the desired environment. With different wattages, dimensions and mounting types, these profiles can be applied in numerous locations, such as stores, cinemas, museums, galleries, hotels, restaurants, meeting rooms, offices, lounges, etc. With Oris 50mm it's possible to mount light lines up to 3,09 meters without joining, with or without trims, add emergency kits with 1 or 3 hours of autonomy and choose white, black or aluminium as finishing colour. The LED profiles can also be configured in ON-OFF, Dimming 0-10VDC or with the advanced DALI PUSH DIM. Brilumen has also available the IES and LDT files for DIALux projects, providing technical assistance during the lighting project.

<b>MOUNTING TYPE</b>	Suspension
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	DALI / Switch Dim, CASAMBI, ON/OFF, Tunable White


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 155 lm/W
<b>CRI</b>	CRI→90, Tunable White CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**




ORIS 50MM LOW GLARE  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
850	23.3	TB, TW	3000K	CS, DA, NF	3376	3207	5218XX.08U5.930.FI
850	23.3	TB, TW	3000K	CS, DA, NF	3376	3207	5218XX.08U8.930.FI
850	23.3	TB, TW	4000K	CS, DA, NF	3608	3428	5218XX.08U5.940.FI
850	23.3	TB, TW	4000K	CS, DA, NF	3608	3428	5218XX.08U8.940.FI
1130	31	TB, TW	3000K	CS, DA, NF	4501	4276	5218XX.11U5.930.FI
1130	31	TB, TW	3000K	CS, DA, NF	4501	4276	5218XX.11U8.930.FI
1130	31	TB, TW	4000K	CS, DA, NF	4811	4571	5218XX.11U5.940.FI
1130	31	TB, TW	4000K	CS, DA, NF	4811	4571	5218XX.11U8.940.FI
1410	38.8	TB, TW	3000K	CS, DA, NF	5626	5345	5218XX.14U5.930.FI
1410	38.8	TB, TW	3000K	CS, DA, NF	5626	5345	5218XX.14U8.930.FI
1410	38.8	TB, TW	4000K	CS, DA, NF	6014	5713	5218XX.14U5.940.FI
1410	38.8	TB, TW	4000K	CS, DA, NF	6014	5713	5218XX.14U8.940.FI
1690	46.6	TB, TW	3000K	CS, DA, NF	6751	6414	5218XX.16U5.930.FI
1690	46.6	TB, TW	3000K	CS, DA, NF	6751	6414	5218XX.16U8.930.FI
1690	46.6	TB, TW	4000K	CS, DA, NF	7217	6856	5218XX.16U5.940.FI
1690	46.6	TB, TW	4000K	CS, DA, NF	7217	6856	5218XX.16U8.940.FI
1970	54.3	TB, TW	3000K	CS, DA, NF	7876	7483	5218XX.19U5.930.FI
1970	54.3	TB, TW	3000K	CS, DA, NF	7876	7483	5218XX.19U8.930.FI
1970	54.3	TB, TW	4000K	CS, DA, NF	8420	7999	5218XX.19U5.940.FI
1970	54.3	TB, TW	4000K	CS, DA, NF	8420	7999	5218XX.19U8.940.FI
2250	62.1	TB, TW	3000K	CS, DA, NF	9002	8552	5218XX.22U5.930.FI
2250	62.1	TB, TW	3000K	CS, DA, NF	9002	8552	5218XX.22U8.930.FI
2250	62.1	TB, TW	4000K	CS, DA, NF	9622	9141	5218XX.22U5.940.FI
2250	62.1	TB, TW	4000K	CS, DA, NF	9622	9141	5218XX.22U8.940.FI
2530	69.8	TB, TW	3000K	CS, DA, NF	10127	9620	5218XX.25U5.930.FI
2530	69.8	TB, TW	3000K	CS, DA, NF	10127	9620	5218XX.25U8.930.FI
2530	69.8	TB, TW	4000K	CS, DA, NF	10825	10284	5218XX.25U5.940.FI
2530	69.8	TB, TW	4000K	CS, DA, NF	10825	10284	5218XX.25U8.940.FI
2810	77.6	TB, TW	3000K	CS, DA, NF	11252	10689	5218XX.28U5.930.FI
2810	77.6	TB, TW	3000K	CS, DA, NF	11252	10689	5218XX.28U8.930.FI
2810	77.6	TB, TW	4000K	CS, DA, NF	12028	11427	5218XX.28U5.940.FI
2810	77.6	TB, TW	4000K	CS, DA, NF	12028	11427	5218XX.28U8.940.FI
3090	85.4	TB, TW	3000K	CS, DA, NF	12377	11758	5218XX.30U5.930.FI
3090	85.4	TB, TW	3000K	CS, DA, NF	12377	11758	5218XX.30U8.930.FI
3090	85.4	TB, TW	4000K	CS, DA, NF	13231	12569	5218XX.30U5.940.FI
3090	85.4	TB, TW	4000K	CS, DA, NF	13231	12569	5218XX.30U8.940.FI

SELECT YOUR PREFERRED  
OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
CASAMBI	CS	3000K	30	Textured Black	TB
DALI / Switch Dim ON/OFF	DA NF	4000K	40	Textured White	TW



ORIS 50MM LOW GLARE  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
850	17.9	TB, TW	2700K - 6500K	TU	2597	2467	218XX.08U5.92765.FI
850	17.9	TB, TW	2700K - 6500K	TU	2597	2467	218XX.08U8.92765.FI
1130	23.9	TB, TW	2700K - 6500K	TU	3463	3289	218XX.11U5.92765.FI
1130	23.9	TB, TW	2700K - 6500K	TU	3463	3289	218XX.11U8.92765.FI
1410	29.9	TB, TW	2700K - 6500K	TU	4328	4112	218XX.14U5.92765.FI
1410	29.9	TB, TW	2700K - 6500K	TU	4328	4112	218XX.14U8.92765.FI
1690	35.8	TB, TW	2700K - 6500K	TU	5194	4934	218XX.16U5.92765.FI
1690	35.8	TB, TW	2700K - 6500K	TU	5194	4934	218XX.16U8.92765.FI
1970	41.8	TB, TW	2700K - 6500K	TU	6060	5757	218XX.19U5.92765.FI
1970	41.8	TB, TW	2700K - 6500K	TU	6060	5757	218XX.19U8.92765.FI
2250	47.8	TB, TW	2700K - 6500K	TU	6925	6579	218XX.22U5.92765.FI
2250	47.8	TB, TW	2700K - 6500K	TU	6925	6579	218XX.22U8.92765.FI
2530	53.7	TB, TW	2700K - 6500K	TU	7791	7401	218XX.25U5.92765.FI
2530	53.7	TB, TW	2700K - 6500K	TU	7791	7401	218XX.25U8.92765.FI

SELECT YOUR PREFERRED  
OPTION




CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TU	2700K - 6500K	92765	Textured Black	TB
				Textured White	TW

ACCESSORIES



Suspension Kit  
Suspension kit 1,5m (1un)  
Suspension kit 3 m (1un)  
Suspension kit 5 m (1un)

Silver  
80303017.SL  
80303018.SL  
80303019.SL

	Ceiling Rose Recessed Ceiling Rose Recessed	Textured White 80303020.TW	Textured Silver 80303020.TS	Textured Black 80303020.TB
	Ceiling Rose Surface Ceiling Rose Surface	Textured White 80303021.TW	Textured Silver 80303021.TS	Textured Black 80303021.TB
	Power Cable 0,75 Power Cable 1.5m Power Cable 3m Power Cable 5m	ON/Off 80303001 80303002 80303003	DALI Push 80303004 80303005 80303006	