

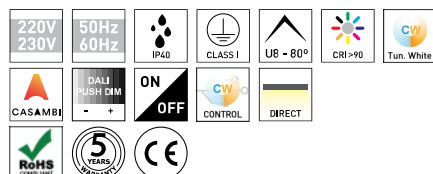
**DESCRIPTION**

A space only reveals its true charm with the right lighting. Being aware of this reality, Brilumen presents a LED profiles collection with a 5 Year Warranty, that will help you to create the desired environment. With different wattages, dimensions and mounting types, these profiles can be applied in numerous locations, such as stores, cinemas, museums, galleries, hotels, restaurants, meeting rooms, offices, lounges, etc. With Oris 50mm it's possible to mount light lines up to 5,05 meters without joining, with or without trims, add emergency kits with 1 or 3 hours of autonomy and choose white, black or aluminium as finishing colour. The LED profiles can also be configured in ON-OFF, Dimming 0-10VDC or with the advanced DALI PUSH DIM. Brilumen has also available the IES and LDT files for DIALux projects, providing technical assistance during the lighting project.

<b>MOUNTING TYPE</b>	Suspension
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Anodized aluminium, Textured White
<b>CONTROL</b>	DALI / Switch Dim, CASAMBI, ON/OFF, Tunable White


**TECHNICAL DRAWING**
**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 201 lm/W
<b>CRI</b>	CRI→90, Tunable White CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1


**ICONOGRAPHY**

**ORIS 50 PRISMATIC**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
850	16.8	AL, TB, TW	3000K	CS, DA, NF	3192	2554	5175XX.08P8.930.FI
850	16.8	AL, TB, TW	4000K	CS, DA, NF	3377	2701	5175XX.08P8.940.FI
1130	22.4	AL, TB, TW	3000K	CS, DA, NF	4256	3405	5175XX.11P8.930.FI
1130	22.4	AL, TB, TW	4000K	CS, DA, NF	4502	3602	5175XX.11P8.940.FI
1410	28	AL, TB, TW	3000K	CS, DA, NF	5320	4256	5175XX.14P8.930.FI
1410	28	AL, TB, TW	4000K	CS, DA, NF	5628	4502	5175XX.14P8.940.FI
1690	33.6	AL, TB, TW	3000K	CS, DA, NF	6384	5107	5175XX.16P8.930.FI
1690	33.6	AL, TB, TW	4000K	CS, DA, NF	6754	5403	5175XX.16P8.940.FI
1970	39.2	AL, TB, TW	3000K	CS, DA, NF	7448	5958	5175XX.19P8.930.FI
1970	39.2	AL, TB, TW	4000K	CS, DA, NF	7879	6303	5175XX.19P8.940.FI
2250	44.8	AL, TB, TW	3000K	CS, DA, NF	8512	6810	5175XX.22P8.930.FI
2250	44.8	AL, TB, TW	4000K	CS, DA, NF	9005	7204	5175XX.22P8.940.FI
2530	50.4	AL, TB, TW	3000K	CS, DA, NF	9576	7661	5175XX.25P8.930.FI
2530	50.4	AL, TB, TW	4000K	CS, DA, NF	10130	8104	5175XX.25P8.940.FI
2810	56	AL, TB, TW	3000K	CS, DA, NF	10640	8512	5175XX.28P8.930.FI
2810	56	AL, TB, TW	4000K	CS, DA, NF	11256	9005	5175XX.28P8.940.FI
3090	61.6	AL, TB, TW	3000K	CS, DA, NF	11704	9363	5175XX.30P8.930.FI
3090	61.6	AL, TB, TW	4000K	CS, DA, NF	12382	9905	5175XX.30P8.940.FI
3370	67.2	AL, TB, TW	3000K	CS, DA, NF	12768	10214	5175XX.33P8.930.FI
3370	67.2	AL, TB, TW	4000K	CS, DA, NF	13507	10806	5175XX.33P8.940.FI
3930	78.4	AL, TB, TW	3000K	CS, DA, NF	14896	11917	5175XX.39P8.930.FI
3930	78.4	AL, TB, TW	4000K	CS, DA, NF	15758	12607	5175XX.39P8.940.FI
4490	89.6	AL, TB, TW	3000K	CS, DA, NF	17024	13619	5175XX.44P8.930.FI
4490	89.6	AL, TB, TW	4000K	CS, DA, NF	18010	14408	5175XX.44P8.940.FI
5050	100.8	AL, TB, TW	3000K	CS, DA, NF	19152	15322	5175XX.50P8.930.FI
5050	100.8	AL, TB, TW	4000K	CS, DA, NF	20261	16209	5175XX.50P8.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
CASAMBI	CS	3000K	30	Anodized aluminium	AL
DALI / Switch Dim	DA	4000K	40	Textured Black	TB
ON/OFF	NF			Textured White	TW


**ORIS 50 PRISMATIC**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
850	25.2	AL, TB, TW	2700K - 6500K	TU	3175	2540	5175XX.08P8.92765.F 
1130	33.6	AL, TB, TW	2700K - 6500K	TU	4234	3387	5175XX.11P8.92765.F 
1410	42	AL, TB, TW	2700K - 6500K	TU	5292	4234	5175XX.14P8.92765.F 
1690	50.4	AL, TB, TW	2700K - 6500K	TU	6350	5080	5175XX.16P8.92765.F 
1970	58.8	AL, TB, TW	2700K - 6500K	TU	7409	5927	5175XX.19P8.92765.F 
2250	67.2	AL, TB, TW	2700K - 6500K	TU	8467	6774	5175XX.22P8.92765.F 
2530	75.6	AL, TB, TW	2700K - 6500K	TU	9526	7620	5175XX.25P8.92765.F 
2810	84	AL, TB, TW	2700K - 6500K	TU	10584	8467	5175XX.28P8.92765.F 
3090	92.4	AL, TB, TW	2700K - 6500K	TU	11642	9314	5175XX.30P8.92765.F 
3370	100.8	AL, TB, TW	2700K - 6500K	TU	12701	10161	5175XX.33P8.92765.F 
3930	117.6	AL, TB, TW	2700K - 6500K	TU	14818	11854	5175XX.39P8.92765.F 
4490	134.4	AL, TB, TW	2700K - 6500K	TU	16934	13548	5175XX.44P8.92765.F 
5050	151.2	AL, TB, TW	2700K - 6500K	TU	19051	15241	5175XX.50P8.92765.F 

SELECT YOUR PREFERRED  
 OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TU	2700K - 6500K	92765	Anodized aluminium	AL
				Textured Black	TB
				Textured White	TW

**ACCESSORIES**


**Suspension Kit**  
 Suspension kit 1,5m (1un)  
 Suspension kit 3 m (1un)  
 Suspension kit 5 m (1un)

**Silver**  
 80303017.SL  
 80303018.SL  
 80303019.SL



**Ceiling Rose Surface**  
 Ceiling Rose Surface

**Textured White** **Textured Silver** **Textured Black**  
 80303021.TW 80303021.TS 80303021.TB



**Power Cable 0,75**  
 Power Cable 1.5m  
 Power Cable 3m  
 Power Cable 5m

**ON/Off** **DALI Push**  
 80303001 80303004  
 80303002 80303005  
 80303003 80303006



**Ceiling Rose Recessed**  
 Ceiling Rose Recessed

**Textured White** **Textured Silver** **Textured Black**  
 80303020.TW 80303020.TS 80303020.TB