

DESCRIPTION

A space only reveals its true charm with the right lighting. Being aware of this reality, Brilumen presents a LED profiles collection with a 5 Year Warranty, that will help you to create the desired environment. With different wattages, dimensions and mounting types, these profiles can be applied in numerous locations, such as stores, cinemas, museums, galleries, hotels, restaurants, meeting rooms, offices, lounges, etc. With Oris 50mm it's possible to mount light lines up to 3,09 meters without joining, with or without trims, add emergency kits with 1 or 3 hours of autonomy and choose white, black or aluminium as finishing colour. The LED profiles can also be configured in ON-OFF, Dimming 0-10VDC or with the advanced DALI PUSH DIM. Brilumen has also available the IES and LDT files for DIALux projects, providing technical assistance during the lighting project.


APPLICATION	, AreasAplicação TEST EN
MOUNTING	Trimless
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium
CONTROL	DALI / PUSH Dim, ON/OFF, Tunable White



TECHNICAL DRAWING

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 197 lm/W
CRI	CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1



ICONOGRAPHY



ORIS 50MM TRIM. LOW GLARE
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	17,3	AL	3000K	DA, NF, TW	3253	3058	213XX.08U5.830.FI
850	17,3	AL	3000K	DA, NF, TW	3253	3091	213XX.08U8.830.FI
850	17,3	AL	4000K	DA, NF, TW	3405	3201	213XX.08U5.840.FI
850	17,3	AL	4000K	DA, NF, TW	3405	3235	213XX.08U8.840.FI
1130	23	AL	3000K	DA, NF, TW	4338	4078	213XX.11U5.830.FI
1130	23	AL	3000K	DA, NF, TW	4338	4122	213XX.11U8.830.FI
1130	23	AL	4000K	DA, NF, TW	4540	4268	213XX.11U5.840.FI
1130	23	AL	4000K	DA, NF, TW	4540	4313	213XX.11U8.840.FI
1130	32,4	AL	2700K	DA, NF, TW	5320	5001	213XX.11U5.82765.FI
1130	32,4	AL	2700K	DA, NF, TW	5320	5054	213XX.11U8.82765.FI
1410	28,8	AL	3000K	DA, NF, TW	5422	5097	213XX.14U5.830.FI
1410	28,8	AL	3000K	DA, NF, TW	5422	5151	213XX.14U8.830.FI
1410	28,8	AL	4000K	DA, NF, TW	5675	5335	213XX.14U5.840.FI
1410	28,8	AL	4000K	DA, NF, TW	5675	5392	213XX.14U8.840.FI
1690	34,5	AL	3000K	DA, NF, TW	6507	6117	213XX.16U5.830.FI
1690	34,5	AL	3000K	DA, NF, TW	6507	6182	213XX.16U8.830.FI
1690	34,5	AL	4000K	DA, NF, TW	6810	6402	213XX.16U5.840.FI
1690	34,5	AL	4000K	DA, NF, TW	6810	6470	213XX.16U8.840.FI
1690	48,6	AL	2700K	DA, NF, TW	7980	7502	213XX.16U5.82765.FI
1690	48,6	AL	2700K	DA, NF, TW	7980	7581	213XX.16U8.82765.FI
1970	40,3	AL	3000K	DA, NF, TW	7591	7136	213XX.19U5.830.FI
1970	40,3	AL	3000K	DA, NF, TW	7591	7213	213XX.19U8.830.FI
1970	40,3	AL	4000K	DA, NF, TW	7945	7469	213XX.19U5.840.FI
1970	40,3	AL	4000K	DA, NF, TW	7945	7548	213XX.19U8.840.FI
2250	46	AL	3000K	DA, NF, TW	8676	8156	213XX.22U5.830.FI
2250	46	AL	3000K	DA, NF, TW	8676	8244	213XX.22U8.830.FI
2250	46	AL	4000K	DA, NF, TW	9080	8536	213XX.22U5.840.FI
2250	46	AL	4000K	DA, NF, TW	9080	8626	213XX.22U8.840.FI
2250	64,8	AL	2700K	DA, NF, TW	10640	10002	213XX.22U5.82765.FI
2250	64,8	AL	2700K	DA, NF, TW	10640	10108	213XX.22U8.82765.FI
2530	51,8	AL	3000K	DA, NF, TW	9760	9175	213XX.25U5.830.FI
2530	51,8	AL	3000K	DA, NF, TW	9760	9273	213XX.25U8.830.FI
2530	51,8	AL	4000K	DA, NF, TW	10215	9603	213XX.25U5.840.FI
2530	51,8	AL	4000K	DA, NF, TW	10215	9705	213XX.25U8.840.FI
2810	57,6	AL	3000K	DA, NF, TW	10844	10194	213XX.28U5.830.FI
2810	57,6	AL	3000K	DA, NF, TW	10844	10302	213XX.28U8.830.FI
2810	57,6	AL	4000K	DA, NF, TW	11350	10670	213XX.28U5.840.FI
2810	57,6	AL	4000K	DA, NF, TW	11350	10784	213XX.28U8.840.FI
2810	81	AL	2700K	DA, NF, TW	13300	12503	213XX.28U5.82765.FI
2810	81	AL	2700K	DA, NF, TW	13300	12635	213XX.28U8.82765.FI
3090	63,3	AL	3000K	DA, NF, TW	11929	11214	213XX.30U5.830.FI
3090	63,3	AL	3000K	DA, NF, TW	11929	11333	213XX.30U8.830.FI
3090	63,3	AL	4000K	DA, NF, TW	12485	11737	213XX.30U5.840.FI
3090	63,3	AL	4000K	DA, NF, TW	12485	11862	213XX.30U8.840.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX
DALI / PUSH Dim	DA
ON/OFF	NF
Tunable White	TW

COLOR TEMP.	CT
2700K	27
3000K	30
4000K	40

FINISHING	FI
Anodized aluminium	AL



ORIS 50MM TRIM. LOW GLARE
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→80

ACCESSORIES




Plaster KIT 4 a 5 cm
Plaster KIT 4 a 5 cm
4 - 5cm
80303058



Plaster KIT 0,7 a 2 cm
Plaster KIT 0,7 a 2 cm
0.7 - 2.1cm
80303059


PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS LOW GLARE

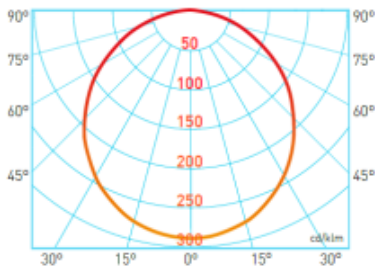


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W /000K CRI90 1120MM

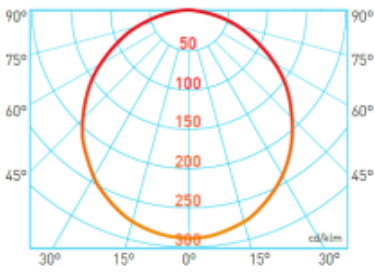


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W /000K CRI90 1120MM

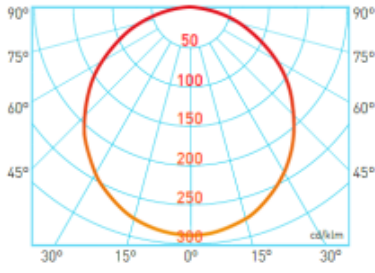


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W /000K CRI90 1120MM

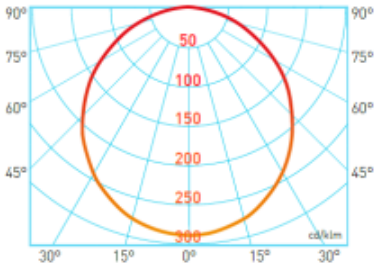


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W /000K CRI90 1120MM

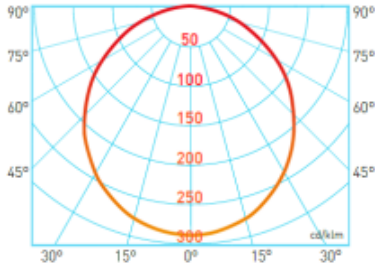


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W /000K CRI90 1120MM

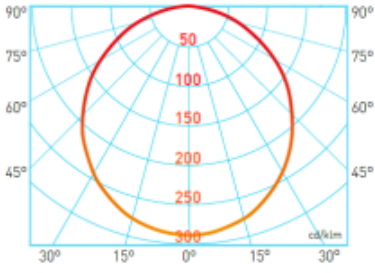


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W /000K CRI90 1120MM

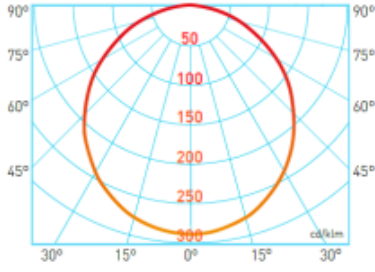


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W /000K CRI90 1120MM

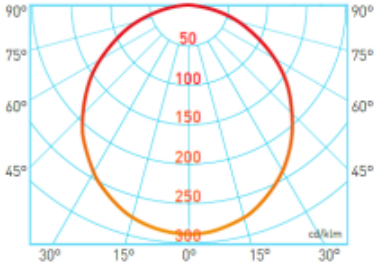

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W /000K CRI90 1120MM

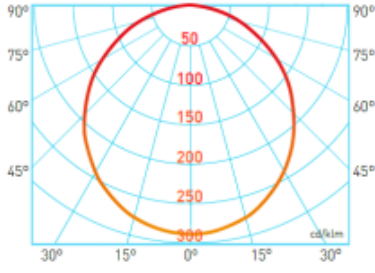

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W /000K CRI90 1120MM