


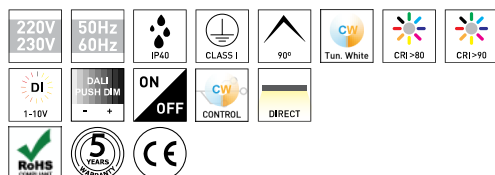
DESCRIPTION

A space only reveals its true charm with the right lighting. Being aware of this reality, Brilumen presents a LED profiles collection with a 5 Year Warranty, that will help you to create the desired environment. With different wattages, dimensions and mounting types, these profiles can be applied in numerous locations, such as stores, cinemas, museums, galleries, hotels, restaurants, meeting rooms, offices, lounges, etc. With Oris 50mm it's possible to mount light lines up to 5,05 meters without joining, with or without trims, add emergency kits with 1 or 3 hours of autonomy and choose white, black or aluminium as finishing colour. The LED profiles can also be configured in ON-OFF, Dimming 0-10VDC or with the advanced DALI PUSH DIM. Brilumen has also available the IES and LDT files for DIALux projects, providing technical assistance during the lighting project.

APPLICATION	, AreasAplicação TEST EN
MOUNTING	Trimless
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured White
CONTROL	DALI / PUSH Dim, ON/OFF


TECHNICAL DRAWING
LED FEATURES

LUMINOUS EFFICIENCY	UP TO 169 lm/W
CRI	CRI→90, CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1


ICONOGRAPHY

ORIS 50MM TRIM. OPAL PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	24	AL	3000K	DA, NF	3840	2781	172XX.0809.830.FI
850	24	AL	4000K	DA, NF	4040	2926	172XX.0809.840.FI
1130	32	AL	3000K	DA, NF	5120	3787	172XX.1109.830.FI
1130	32	AL	4000K	DA, NF	5400	3994	172XX.1109.840.FI
1410	40	AL	3000K	DA, NF	6400	4726	172XX.1409.830.FI
1410	40	AL	4000K	DA, NF	6740	4977	172XX.1409.840.FI
1690	48	AL	3000K	DA, NF	7680	5631	172XX.1609.830.FI
1690	48	AL	4000K	DA, NF	8100	5939	172XX.1609.840.FI
1970	56	AL	3000K	DA, NF	8960	6568	172XX.1909.830.FI
1970	56	AL	4000K	DA, NF	9440	6920	172XX.1909.840.FI
2250	64	AL	3000K	DA, NF	10240	7574	172XX.2209.830.FI
2250	64	AL	4000K	DA, NF	10800	7988	172XX.2209.840.FI
2530	72	AL	3000K	DA, NF	11520	8513	172XX.2509.830.FI
2530	72	AL	4000K	DA, NF	12140	8971	172XX.2509.840.FI
2810	80	AL	3000K	DA, NF	12800	9452	172XX.2809.830.FI
2810	80	AL	4000K	DA, NF	13480	9954	172XX.2809.840.FI
3090	88	AL	3000K	DA, NF	14080	10357	172XX.3009.830.FI
3090	88	AL	4000K	DA, NF	14840	10916	172XX.3009.840.FI
4490	128	AL	3000K	DA, NF	20480	15083	172XX.4409.830.FI
4490	128	AL	4000K	DA, NF	21580	15893	172XX.4409.840.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / PUSH Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40		


**ORIS 50MM TRIM. OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1410	39	AL	3000K	DA	6020	4446	176XX.1409.930.FI
1410	39	AL	4000K	DA	6310	4660	176XX.1409.940.FI
1690	46,8	AL	3000K	DA	7230	5301	176XX.1609.930.FI
1690	46,8	AL	4000K	DA	7560	5543	176XX.1609.940.FI
1970	54,6	AL	3000K	DA	8430	6180	176XX.1909.930.FI
1970	54,6	AL	4000K	DA	8830	6473	176XX.1909.940.FI
2250	62,4	AL	3000K	DA	9640	7130	176XX.2209.930.FI
2250	62,4	AL	4000K	DA	10080	7456	176XX.2209.940.FI

**SELECT YOUR PREFERRED
OPTION**

CONTROLTYPE	XX
DALI / PUSH Dim	DA

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Anodized aluminium	AL


**ORIS 50MM TRIM. OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→80**
ACCESSORIES

**Plaster KIT 4 a 5 cm
Plaster KIT 4 a 5 cm**
**4 - 5cm
80303058**

**Plaster KIT 0,7 a 2 cm
Plaster KIT 0,7 a 2 cm**
**0.7 - 2.1cm
80303059**

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS OPAL

