

DESCRIPTION

A space only reveals its true charm with the right lighting. Being aware of this reality, Brilumen presents a LED profiles collection with a 5 Year Warranty, that will help you to create the desired environment. With different wattages, dimensions and mounting types, these profiles can be applied in numerous locations, such as stores, cinemas, museums, galleries, hotels, restaurants, meeting rooms, offices, lounges, etc. With Oris 50mm it's possible to mount light lines up to 5,05 meters without joining, with or without trims, add emergency kits with 1 or 3 hours of autonomy and choose white, black or aluminium as finishing colour. The LED profiles can also be configured in ON-OFF, Dimming 0-10VDC or with the advanced DALI PUSH DIM. Brilumen has also available the IES and LDT files for DIALux projects, providing technical assistance during the lighting project.

MOUNTING	Suspension
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	CASAMBI, DALI / PUSH Dim, ON/OFF, Tunable White




TECHNICAL DRAWING

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 196 lm/W
CRI	CRI→90, Tunable White CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1



ICONOGRAPHY

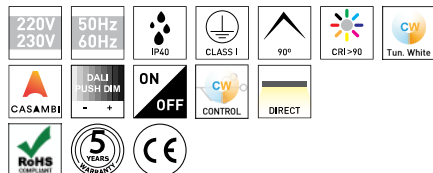

ORIS 50 OPAL SUSPENSION  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	20,3	AL, TB, TW	3000K	CS, DA, NF	3763	2747	5175XX.0809.930.FI
850	20,3	AL, TB, TW	4000K	CS, DA, NF	3987	2910	5175XX.0809.940.FI
1130	27,1	AL, TB, TW	3000K	CS, DA, NF	5017	3663	5175XX.1109.930.FI
1130	27,1	AL, TB, TW	4000K	CS, DA, NF	5316	3880	5175XX.1109.940.FI
1410	33,9	AL, TB, TW	3000K	CS, DA, NF	6272	4578	5175XX.1409.930.FI
1410	33,9	AL, TB, TW	4000K	CS, DA, NF	6644	4850	5175XX.1409.940.FI
1690	40,7	AL, TB, TW	3000K	CS, DA, NF	7526	5494	5175XX.1609.930.FI
1690	40,7	AL, TB, TW	4000K	CS, DA, NF	7973	5820	5175XX.1609.940.FI
1970	47,5	AL, TB, TW	3000K	CS, DA, NF	8780	6409	5175XX.1909.930.FI
1970	47,5	AL, TB, TW	4000K	CS, DA, NF	9302	6791	5175XX.1909.940.FI
2250	54,2	AL, TB, TW	3000K	CS, DA, NF	10034	7325	5175XX.2209.930.FI
2250	54,2	AL, TB, TW	4000K	CS, DA, NF	10631	7761	5175XX.2209.940.FI
2530	61	AL, TB, TW	3000K	CS, DA, NF	11289	8241	5175XX.2509.930.FI
2530	61	AL, TB, TW	4000K	CS, DA, NF	11960	8731	5175XX.2509.940.FI
2810	67,8	AL, TB, TW	3000K	CS, DA, NF	12543	9156	5175XX.2809.930.FI
2810	67,8	AL, TB, TW	4000K	CS, DA, NF	13289	9701	5175XX.2809.940.FI
3090	74,6	AL, TB, TW	3000K	CS, DA, NF	13797	10072	5175XX.3009.930.FI
3090	74,6	AL, TB, TW	4000K	CS, DA, NF	14618	10671	5175XX.3009.940.FI
3370	81,4	AL, TB, TW	3000K	CS, DA, NF	15052	10988	5175XX.3309.930.FI
3370	81,4	AL, TB, TW	4000K	CS, DA, NF	15947	11641	5175XX.3309.940.FI
3930	94,9	AL, TB, TW	3000K	CS, DA, NF	17560	12819	5175XX.3909.930.FI
3930	94,9	AL, TB, TW	4000K	CS, DA, NF	18604	13581	5175XX.3909.940.FI
4490	108,5	AL, TB, TW	3000K	CS, DA, NF	20069	14650	5175XX.4409.930.FI
4490	108,5	AL, TB, TW	4000K	CS, DA, NF	21262	15521	5175XX.4409.940.FI
5050	122	AL, TB, TW	3000K	CS, DA, NF	22577	16482	5175XX.5009.930.FI
5050	122	AL, TB, TW	4000K	CS, DA, NF	23920	17461	5175XX.5009.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
CASAMBI	CS	3000K	30	Anodized aluminium	AL
DALI / PUSH Dim	DA	4000K	40	Textured Black	TB
ON/OFF	NF			Textured White	TW



ORIS 50 OPAL SUSPENSION  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	25,2	AL, TB, TW	2700K - 6500K	TU	3175	2318	5175XX.0809.92765.F 
1130	33,6	AL, TB, TW	2700K - 6500K	TU	4234	3091	5175XX.1109.92765.F 
1410	42	AL, TB, TW	2700K - 6500K	TU	5292	3863	5175XX.1409.92765.F 
1690	50,4	AL, TB, TW	2700K - 6500K	TU	6350	4636	5175XX.1609.92765.F 
1970	58,8	AL, TB, TW	2700K - 6500K	TU	7409	5408	5175XX.1909.92765.F 
2250	67,2	AL, TB, TW	2700K - 6500K	TU	8467	6181	5175XX.2209.92765.F 
2530	75,6	AL, TB, TW	2700K - 6500K	TU	9526	6954	5175XX.2509.92765.F 
2810	84	AL, TB, TW	2700K - 6500K	TU	10584	7726	5175XX.2809.92765.F 
3090	92,4	AL, TB, TW	2700K - 6500K	TU	11642	8499	5175XX.3009.92765.F 
3370	100,8	AL, TB, TW	2700K - 6500K	TU	12701	9272	5175XX.3309.92765.F 
3930	117,6	AL, TB, TW	2700K - 6500K	TU	14818	10817	5175XX.3909.92765.F 
4490	134,4	AL, TB, TW	2700K - 6500K	TU	16934	12362	5175XX.4409.92765.F 
5050	151,2	AL, TB, TW	2700K - 6500K	TU	19051	13907	5175XX.5009.92765.F 

SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX
Tunable White	TU

COLOR TEMP.	CT
2700K - 6500K	92765

FINISHING	FI
Anodized aluminium	AL
Textured Black	TB
Textured White	TW

ACCESSORIES



Suspension Kit  
Suspension kit 1,5m (1un)  
Suspension kit 3 m (1un)  
Suspension kit 5 m (1un)

Silver  
80303017.SL  
80303018.SL  
80303019.SL



Ceiling Rose Surface  
Ceiling Rose Surface

Textured White Textured Silver Textured Black  
80303021.TW 80303021.TS 80303021.TB



Clear Power Cable  
Power Cable 1.5m  
Power Cable 3m  
Power Cable 5m

ON/OFF DALI Push  
80303001 80303004  
80303002 80303005  
80303003 80303006



Ceiling Rose Recessed  
Ceiling Rose Recessed

Textured White Textured Silver Textured Black  
80303020.TW 80303020.TS 80303020.TB