

DESCRIPTION

The ORIS NEO LINEAR SYSTEMS configuration is designed for creating continuous lines of light, with or without indirect lighting, ensuring visual uniformity and consistent performance in lengths up to 50 meters. Invisible joints and a fast electrical and mechanical connection system guarantee easy installation and a professional finish.

For solutions with different types of optics or segmented lighting, please refer to the ORIS NEO MODULAR configuration.


MOUNTING	Suspension
LIGHT DISTRIBUTION	Directa e Indirecta
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	DALI / PUSH Dim, ON/OFF, Tunable White



LED FEATURES

LUMINOUS EFFICIENCY	UP TO 164 lm/W
CRI	CRI->90, Tunable White CRI->90
LIFESPAN	50.000 Hours, 72000h Tp55
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

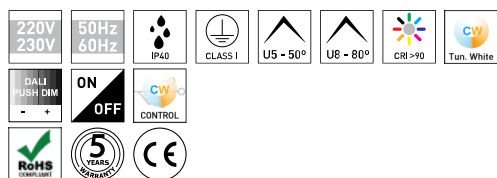

ORIS NEO D/I LS SUSP. LG
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	37,6	TB, TW	3000K	DA, NF	5814	5195	523XX.11U5.930.FI
1130	37,6	TB, TW	3000K	DA, NF	5814	5195	523XX.11U8.930.FI
1130	37,6	TB, TW	4000K	DA, NF	6197	5541	523XX.11U5.940.FI
1130	37,6	TB, TW	4000K	DA, NF	6197	5541	523XX.11U8.940.FI
1410	47,6	TB, TW	3000K	DA, NF	7377	6571	523XX.14U5.930.FI
1410	47,6	TB, TW	3000K	DA, NF	7377	6571	523XX.14U8.930.FI
1410	47,6	TB, TW	4000K	DA, NF	7862	7007	523XX.14U5.940.FI
1410	47,6	TB, TW	4000K	DA, NF	7862	7007	523XX.14U8.940.FI
1690	57,6	TB, TW	3000K	DA, NF	8940	7946	523XX.16U5.930.FI
1690	57,6	TB, TW	3000K	DA, NF	8940	7946	523XX.16U8.930.FI
1690	57,6	TB, TW	4000K	DA, NF	9527	8473	523XX.16U5.940.FI
1690	57,6	TB, TW	4000K	DA, NF	9527	8473	523XX.16U8.940.FI
1970	67,5	TB, TW	3000K	DA, NF	10503	9321	523XX.19U5.930.FI
1970	67,5	TB, TW	3000K	DA, NF	10503	9321	523XX.19U8.930.FI
1970	67,5	TB, TW	4000K	DA, NF	11192	9939	523XX.19U5.940.FI
1970	67,5	TB, TW	4000K	DA, NF	11192	9939	523XX.19U8.940.FI
2250	75,3	TB, TW	3000K	DA, NF	11628	10390	523XX.22U5.930.FI
2250	75,3	TB, TW	3000K	DA, NF	11628	10390	523XX.22U8.930.FI
2250	75,3	TB, TW	4000K	DA, NF	12394	11082	523XX.22U5.940.FI
2250	75,3	TB, TW	4000K	DA, NF	12394	11082	523XX.22U8.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / PUSH Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured White	TW



ORIS NEO D/I LS SUSP. LG
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1410	46,7	TB, TW	2700K - 6500K	TU	6445	5657	523XX.14U5.92765.FI
1410	46,7	TB, TW	2700K - 6500K	TU	6445	5657	523XX.14U8.92765.FI
1690	56,8	TB, TW	2700K - 6500K	TU	7840	6866	523XX.16U5.92765.FI
1690	56,8	TB, TW	2700K - 6500K	TU	7840	6866	523XX.16U8.92765.FI
1970	67	TB, TW	2700K - 6500K	TU	9235	8074	523XX.19U5.92765.FI
1970	67	TB, TW	2700K - 6500K	TU	9235	8074	523XX.19U8.92765.FI
2250	73	TB, TW	2700K - 6500K	TU	10100	8897	523XX.22U5.92765.FI
2250	73	TB, TW	2700K - 6500K	TU	10100	8897	523XX.22U8.92765.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX
Tunable White	TU

COLOR TEMP.	CT
2700K - 6500K	92765

FINISHING	FI
Textured Black	TB
Textured White	TW

ACCESSORIES



Suspension Kit
Suspension kit 1,5m (1un) 80303017.SL
Suspension kit 3 m (1un) 80303018.SL
Suspension kit 5 m (1un) 80303019.SL

Silver



Ceiling Rose Surface
Ceiling Rose Surface

Textured White 80303021.TW
Textured Silver 80303021.TS
Textured Black 80303021.TB



Power Cable 0,75
Power Cable 1.5m
Power Cable 3m
Power Cable 5m

ON/OFF 80303001
DALI Push 80303004
80303002 80303005
80303003 80303006



Sliding suspension kit
Slid. susp. kit 1.5m (1u) 80304012.SL
Slid. susp. kit 3m (1u) 80304013.SL
Slid. susp. kit 5m (1u) 80304014.SL

Silver



Ceiling Rose Recessed
Ceiling Rose Recessed

Textured White 80303020.TW
Textured Silver 80303020.TS
Textured Black 80303020.TB



Joint ON/OFF ORIS NEO
Joint ON/OFF ORIS NEO

ON/OFF 80304001



Joint DALI ORIS NEO
Joint DALI ORIS NEO

DALI 80304002