

**DESCRIPTION**

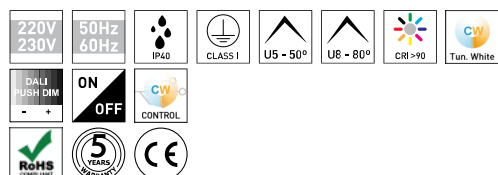
The ORIS NEO LINEAR SYSTEMS configuration is designed for creating continuous lines of light, with or without indirect lighting, ensuring visual uniformity and consistent performance in lengths up to 50 meters. Invisible joints and a fast electrical and mechanical connection system guarantee easy installation and a professional finish.

For solutions with different types of optics or segmented lighting, please refer to the ORIS NEO MODULAR configuration.

<b>MOUNTING TYPE</b>	Suspension
<b>LIGHT DISTRIBUTION</b>	Directa e Indirecta
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF, Tunable White


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 164 lm/W
<b>CRI</b>	CRI->90, Tunable White CRI->90
<b>LIFESPAN</b>	50.000 Hours, 72000h Tp55
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**ICONOGRAPHY**

**ORIS NEO D/I LS SUSP. LG**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	37.6	TB, TW	3000K	DA, NF	5814	5195	523XX.11U5.930.FI
1130	37.6	TB, TW	3000K	DA, NF	5814	5195	523XX.11U8.930.FI
1130	37.6	TB, TW	4000K	DA, NF	6197	5541	523XX.11U5.940.FI
1130	37.6	TB, TW	4000K	DA, NF	6197	5541	523XX.11U8.940.FI
1410	47.6	TB, TW	3000K	DA, NF	7377	6571	523XX.14U5.930.FI
1410	47.6	TB, TW	3000K	DA, NF	7377	6571	523XX.14U8.930.FI
1410	47.6	TB, TW	4000K	DA, NF	7862	7007	523XX.14U5.940.FI
1410	47.6	TB, TW	4000K	DA, NF	7862	7007	523XX.14U8.940.FI
1690	57.6	TB, TW	3000K	DA, NF	8940	7946	523XX.16U5.930.FI
1690	57.6	TB, TW	3000K	DA, NF	8940	7946	523XX.16U8.930.FI
1690	57.6	TB, TW	4000K	DA, NF	9527	8473	523XX.16U5.940.FI
1690	57.6	TB, TW	4000K	DA, NF	9527	8473	523XX.16U8.940.FI
1970	67.5	TB, TW	3000K	DA, NF	10503	9321	523XX.19U5.930.FI
1970	67.5	TB, TW	3000K	DA, NF	10503	9321	523XX.19U8.930.FI
1970	67.5	TB, TW	4000K	DA, NF	11192	9939	523XX.19U5.940.FI
1970	67.5	TB, TW	4000K	DA, NF	11192	9939	523XX.19U8.940.FI
2250	75.3	TB, TW	3000K	DA, NF	11628	10390	523XX.22U5.930.FI
2250	75.3	TB, TW	3000K	DA, NF	11628	10390	523XX.22U8.930.FI
2250	75.3	TB, TW	4000K	DA, NF	12394	11082	523XX.22U5.940.FI
2250	75.3	TB, TW	4000K	DA, NF	12394	11082	523XX.22U8.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured White	TW


**ORIS NEO D/I LS SUSP. LG**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1410	46.7	TB, TW	2700K - 6500K	TU	6445	5657	523XX.14U5.92765.FI
1410	46.7	TB, TW	2700K - 6500K	TU	6445	5657	523XX.14U8.92765.FI
1690	56.8	TB, TW	2700K - 6500K	TU	7840	6866	523XX.16U5.92765.FI
1690	56.8	TB, TW	2700K - 6500K	TU	7840	6866	523XX.16U8.92765.FI
1970	67	TB, TW	2700K - 6500K	TU	9235	8074	523XX.19U5.92765.FI
1970	67	TB, TW	2700K - 6500K	TU	9235	8074	523XX.19U8.92765.FI
2250	73	TB, TW	2700K - 6500K	TU	10100	8897	523XX.22U5.92765.FI
2250	73	TB, TW	2700K - 6500K	TU	10100	8897	523XX.22U8.92765.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TU	2700K - 6500K	92765	Textured Black	TB
				Textured White	TW

**ACCESSORIES**

	<b>Suspension Kit</b> Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)	<b>Silver</b> 80303017.SL 80303018.SL 80303019.SL	
	<b>Ceiling Rose Surface</b> Ceiling Rose Surface	<b>Textured White</b> 80303021.TW <b>Textured Silver</b> 80303021.TS <b>Textured Black</b> 80303021.TB	
	<b>Power Cable 0,75</b> Power Cable 1.5m Power Cable 3m Power Cable 5m	<b>ON/OFF</b> 80303001 80303002 80303003	<b>DALI Push</b> 80303004 80303005 80303006
	<b>Sliding suspension kit</b> Slid. susp. kit 1.5m (1u) Slid. susp. kit 3m (1u) Slid. susp. kit 5m (1u)	<b>Silver</b> 80304012.SL 80304013.SL 80304014.SL	
	<b>Ceiling Rose Recessed</b> Ceiling Rose Recessed	<b>Textured White</b> 80303020.TW <b>Textured Silver</b> 80303020.TS <b>Textured Black</b> 80303020.TB	
	<b>Joint ON/OFF ORIS NEO</b> Joint ON/OFF ORIS NEO	<b>ON/OFF</b> 80304001	
	<b>Joint DALI ORIS NEO</b> Joint DALI ORIS NEO	<b>DALI</b> 80304002	