


DESCRIPTION

The ORIS NEO LINEAR SYSTEMS configuration is designed for creating continuous lines of light, with or without indirect lighting, ensuring visual uniformity and consistent performance in lengths up to 50 meters. Invisible joints and a fast electrical and mechanical connection system guarantee easy installation and a professional finish.

For solutions with different types of optics or segmented lighting, please refer to the ORIS NEO MODULAR configuration.


MOUNTING	Suspension
LIGHT DISTRIBUTION	Directa e Indirecta
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	DALI / PUSH Dim, ON/OFF, Tunable White

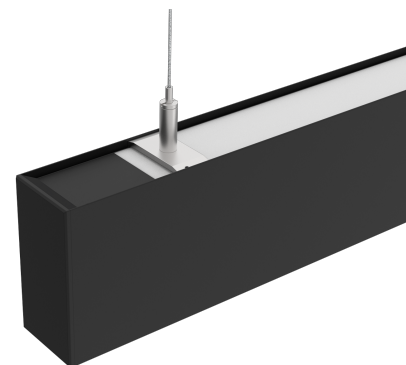

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 199 lm/W
CRI	CRI>90, Tunable White CRI>90
LIFESPAN	50.000 Hours, 72000h Tp55
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

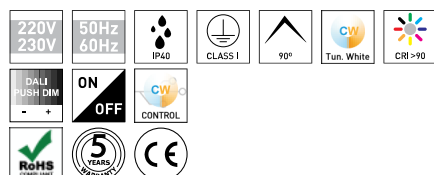

ORIS NEO D/I LS SUSP. OP.
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI>90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	33,7	AL, TB, TW	3000K	DA, NF	6331	4621	522XX.1109.930.FI
1130	33,7	AL, TB, TW	4000K	DA, NF	6702	4892	522XX.1109.940.FI
1410	42,7	AL, TB, TW	3000K	DA, NF	8023	5857	522XX.1409.930.FI
1410	42,7	AL, TB, TW	4000K	DA, NF	8492	6199	522XX.1409.940.FI
1690	51,7	AL, TB, TW	3000K	DA, NF	9715	7092	522XX.1609.930.FI
1690	51,7	AL, TB, TW	4000K	DA, NF	10283	7507	522XX.1609.940.FI
1970	60,7	AL, TB, TW	3000K	DA, NF	11407	8327	522XX.1909.930.FI
1970	60,7	AL, TB, TW	4000K	DA, NF	12074	8814	522XX.1909.940.FI
2250	67,4	AL, TB, TW	3000K	DA, NF	12661	9243	522XX.2209.930.FI
2250	67,4	AL, TB, TW	4000K	DA, NF	13403	9784	522XX.2209.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX
DALI / PUSH Dim	DA
ON/OFF	NF

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Anodized aluminium	AL
Textured Black	TB
Textured White	TW



ORIS NEO D/I LS SUSP. OP.
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI>90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1410	58,8	AL, TB, TW	2700K - 6500K	TU	7409	5408	522XX.1409.92765.FI
1690	71,4	AL, TB, TW	2700K - 6500K	TU	8996	6567	522XX.1609.92765.FI
1970	84	AL, TB, TW	2700K - 6500K	TU	10584	7726	522XX.1909.92765.FI
2250	92,4	AL, TB, TW	2700K - 6500K	TU	11642	8499	522XX.2209.92765.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX
Tunable White	TU

COLOR TEMP.	CT
2700K - 6500K	92765

FINISHING	FI
Anodized aluminium	AL
Textured Black	TB
Textured White	TW

ACCESSORIES

Suspension Kit	Silver
Suspension kit 1,5m (1un)	80303017.SL

	Suspension kit 3 m (1un)	80303018.SL		
	Suspension kit 5 m (1un)	80303019.SL		
	Ceiling Rose Surface	Textured White 80303021.TW	Textured Silver 80303021.TS	Textured Black 80303021.TB
	Ceiling Rose Surface			
	Clear Power Cable	ON/OFF	DALI Push	
	Power Cable 1.5m	80303001	80303004	
	Power Cable 3m	80303002	80303005	
	Power Cable 5m	80303003	80303006	
	Sliding suspension kit	Silver		
	Slid. susp. kit 1.5m (1u)	80304012.SL		
	Slid. susp. kit 3m (1u)	80304013.SL		
	Slid. susp. kit 5m (1u)	80304014.SL		
	Ceiling Rose Recessed	Textured White 80303020.TW	Textured Silver 80303020.TS	Textured Black 80303020.TB
	Ceiling Rose Recessed			
	Joint ON/OFF ORIS NEO	ON/OFF		
	Joint ON/OFF ORIS NEO	80304001		
	Joint DALI ORIS NEO	DALI		
	Joint DALI ORIS NEO	80304002		