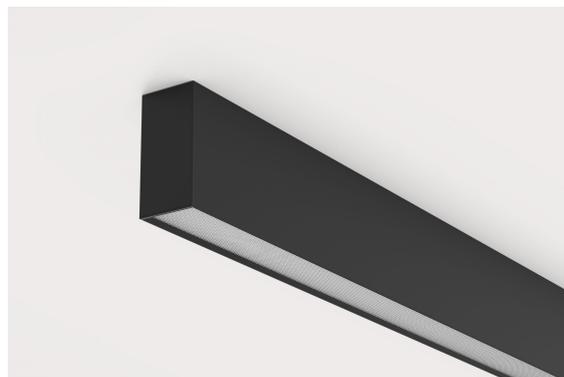


**DESCRIPTION**

The ORIS NEO LINEAR SYSTEMS configuration is designed for creating continuous lines of light, with or without indirect lighting, ensuring visual uniformity and consistent performance in lengths up to 50 meters. Invisible joints and a fast electrical and mechanical connection system guarantee easy installation and a professional finish.


For solutions with different types of optics or segmented lighting, please refer to the ORIS NEO MODULAR configuration.

|                           |  |
|---------------------------|--|
| <b>MOUNTING TYPE</b>      | <b>SALIENTE</b>                                    |
| <b>LIGHT DISTRIBUTION</b> | Directa  |
| <b>POWER SUPPLY</b>       | 220-230V / 50-60 Hz                                |
| <b>WARRANTY</b>           | 5 Years  |
| <b>FINISHING</b>          | Anodized aluminium, Textured Black, Textured White |
| <b>CONTROL</b>            | DALI / Switch Dim, ON/OFF, Tunable White           |


**LED FEATURES**

|                             |                                |
|-----------------------------|--------------------------------|
| <b>LUMINOUS EFFICIENCY</b>  | UP TO 196 lm/W                 |
| <b>CRI</b>                  | CRI->90, Tunable White CRI->90 |
| <b>LIFESPAN</b>             | 50.000 Hours, 72000h Tp55      |
| <b>STEPS MACADAM</b>        | 3 Steps MacAdam                |
| <b>LUMEN MAINTENANCE</b>    | L90/B50                        |
| <b>PHOTOBIOLOGICAL RISK</b> | RG1                            |

**TECHNICAL DRAWING**

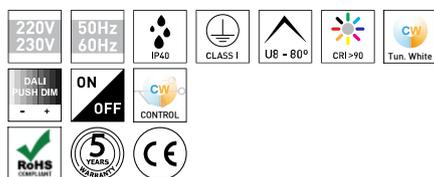**ICONOGRAPHY**

**ORIS NEO LS SURF. MICROPR**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

| LENGTH | POWER | FINISHING  | COLOR TEMP. | CONTROL TYPE | LED LUMENS | LUMINAIRE LM | CODE              |
|--------|-------|------------|-------------|--------------|------------|--------------|-------------------|
| 1130   | 22.4  | AL, TB, TW | 3000K       | DA, NF       | 4256       | 3405         | 362XX.11P8.930.FI |
| 1130   | 22.4  | AL, TB, TW | 4000K       | DA, NF       | 4502       | 3602         | 362XX.11P8.940.FI |
| 1410   | 28    | AL, TB, TW | 3000K       | DA, NF       | 5320       | 4256         | 362XX.14P8.930.FI |
| 1410   | 28    | AL, TB, TW | 4000K       | DA, NF       | 5628       | 4502         | 362XX.14P8.940.FI |
| 1690   | 33.6  | AL, TB, TW | 3000K       | DA, NF       | 6384       | 5107         | 362XX.16P8.930.FI |
| 1690   | 33.6  | AL, TB, TW | 4000K       | DA, NF       | 6754       | 5403         | 362XX.16P8.940.FI |
| 1970   | 39.2  | AL, TB, TW | 3000K       | DA, NF       | 7448       | 5958         | 362XX.19P8.930.FI |
| 1970   | 39.2  | AL, TB, TW | 4000K       | DA, NF       | 7879       | 6303         | 362XX.19P8.940.FI |
| 2250   | 44.8  | AL, TB, TW | 3000K       | DA, NF       | 8512       | 6810         | 362XX.22P8.930.FI |
| 2250   | 44.8  | AL, TB, TW | 4000K       | DA, NF       | 9005       | 7204         | 362XX.22P8.940.FI |

SELECT YOUR PREFERRED OPTION

| CONTROL TYPE      | XX | COLOR TEMP. | CT | FINISHING          | FI |
|-------------------|----|-------------|----|--------------------|----|
| DALI / Switch Dim | DA | 3000K       | 30 | Anodized aluminium | AL |
| ON/OFF            | NF | 4000K       | 40 | Textured Black     | TB |
|                   |    |             |    | Textured White     | TW |

**ORIS NEO LS SURF. MICROPR**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI->90**

| LENGTH | POWER | FINISHING  | COLOR TEMP.   | CONTROL TYPE | LED LUMENS | LUMINAIRE LM | CODE                |
|--------|-------|------------|---------------|--------------|------------|--------------|---------------------|
| 1130   | 33.6  | AL, TB, TW | 2700K - 6500K | TU           | 4234       | 3387         | 362XX.11P8.92765.FI |
| 1410   | 42    | AL, TB, TW | 2700K - 6500K | TU           | 5292       | 4234         | 362XX.14P8.92765.FI |
| 1690   | 50.4  | AL, TB, TW | 2700K - 6500K | TU           | 6350       | 5080         | 362XX.16P8.92765.FI |
| 1970   | 58.8  | AL, TB, TW | 2700K - 6500K | TU           | 7409       | 5927         | 362XX.19P8.92765.FI |
| 2250   | 67.2  | AL, TB, TW | 2700K - 6500K | TU           | 8467       | 6774         | 362XX.22P8.92765.FI |

SELECT YOUR PREFERRED OPTION

| CONTROL TYPE  | XX | COLOR TEMP.   | CT    | FINISHING          | FI |
|---------------|----|---------------|-------|--------------------|----|
| Tunable White | TU | 2700K - 6500K | 92765 | Anodized aluminium | AL |
|               |    |               |       | Textured Black     | TB |
|               |    |               |       | Textured White     | TW |

**ACCESSORIES**

Joint ON/OFF ORIS NEO ON/OFF



Joint ON/OFF ORIS NEO

80304001



Joint DALI ORIS NEO  
Joint DALI ORIS NEO

DALI  
80304002