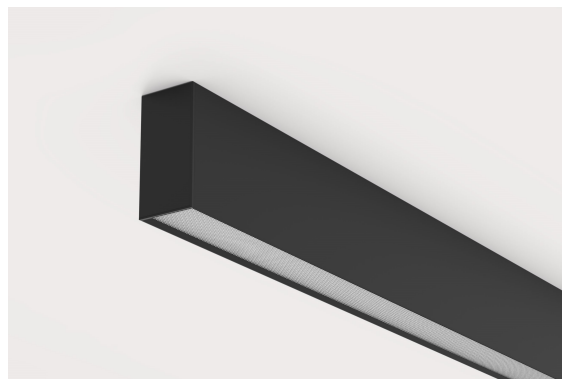


**DESCRIPTION**

The ORIS NEO LINEAR SYSTEMS configuration is designed for creating continuous lines of light, with or without indirect lighting, ensuring visual uniformity and consistent performance in lengths up to 50 meters. Invisible joints and a fast electrical and mechanical connection system guarantee easy installation and a professional finish.


For solutions with different types of optics or segmented lighting, please refer to the ORIS NEO MODULAR configuration.

<b>MOUNTING</b>	<b>SALIENTE</b>
<b>LIGHT DISTRIBUTION</b>	Directa
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Anodized aluminium, Textured Black, Textured White
<b>CONTROL</b>	DALI / PUSH Dim, ON/OFF, Tunable White


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 196 lm/W
<b>CRI</b>	CRI->90, Tunable White CRI->90
<b>LIFESPAN</b>	50.000 Hours, 72000h Tp55
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

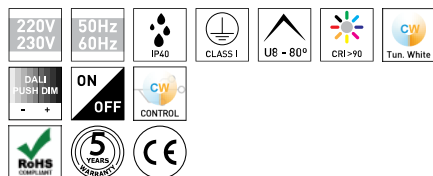**ICONOGRAPHY**

**ORIS NEO LS SURF. MICROPR**  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	22,4	AL, TB, TW	3000K	DA, NF	4256	3405	362XX.11P8.930.FI
1130	22,4	AL, TB, TW	4000K	DA, NF	4502	3602	362XX.11P8.940.FI
1410	28	AL, TB, TW	3000K	DA, NF	5320	4256	362XX.14P8.930.FI
1410	28	AL, TB, TW	4000K	DA, NF	5628	4502	362XX.14P8.940.FI
1690	33,6	AL, TB, TW	3000K	DA, NF	6384	5107	362XX.16P8.930.FI
1690	33,6	AL, TB, TW	4000K	DA, NF	6754	5403	362XX.16P8.940.FI
1970	39,2	AL, TB, TW	3000K	DA, NF	7448	5958	362XX.19P8.930.FI
1970	39,2	AL, TB, TW	4000K	DA, NF	7879	6303	362XX.19P8.940.FI
2250	44,8	AL, TB, TW	3000K	DA, NF	8512	6810	362XX.22P8.930.FI
2250	44,8	AL, TB, TW	4000K	DA, NF	9005	7204	362XX.22P8.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / PUSH Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

**ORIS NEO LS SURF. MICROPR**  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI->90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	33,6	AL, TB, TW	2700K - 6500K	TU	4234	3387	362XX.11P8.92765.FI
1410	42	AL, TB, TW	2700K - 6500K	TU	5292	4234	362XX.14P8.92765.FI
1690	50,4	AL, TB, TW	2700K - 6500K	TU	6350	5080	362XX.16P8.92765.FI
1970	58,8	AL, TB, TW	2700K - 6500K	TU	7409	5927	362XX.19P8.92765.FI
2250	67,2	AL, TB, TW	2700K - 6500K	TU	8467	6774	362XX.22P8.92765.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TU	2700K - 6500K	92765	Anodized aluminium	AL
				Textured Black	TB
				Textured White	TW

**ACCESSORIES**

Joint ON/OFF ORIS NEO ON/OFF



Joint ON/OFF ORIS NEO

80304001



Joint DALI ORIS NEO  
Joint DALI ORIS NEO

DALI  
80304002