


**DESCRIPTION**

The ORIS NEO LINEAR SYSTEMS configuration is designed for creating continuous lines of light, with or without indirect lighting, ensuring visual uniformity and consistent performance in lengths up to 50 meters. Invisible joints and a fast electrical and mechanical connection system guarantee easy installation and a professional finish.

For solutions with different types of optics or segmented lighting, please refer to the ORIS NEO MODULAR configuration.

MOUNTING	SALIENTE
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	DALI / PUSH Dim, ON/OFF, Tunable White

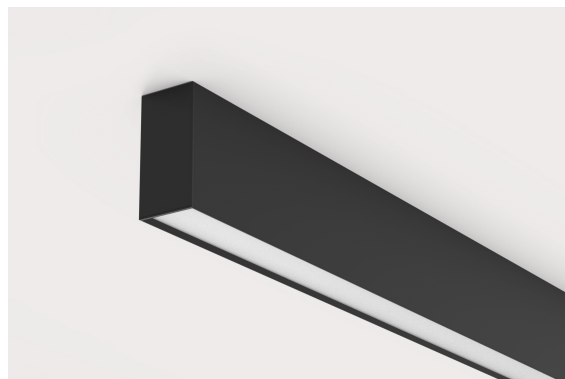


**LED FEATURES**

LUMINOUS EFFICIENCY	UP TO 196 lm/W
CRI	CRI->90, Tunable White CRI->90
LIFESPAN	50.000 Hours, 72000h Tp55
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

**TECHNICAL DRAWING**



**ICONOGRAPHY**

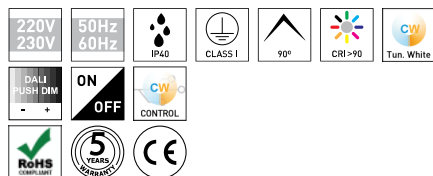

**ORIS NEO LS SURFACE OPAL**  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	27,1	AL, TB, TW	3000K	DA, NF	5017	3663	362XX.1109.930.FI
1130	27,1	AL, TB, TW	4000K	DA, NF	5316	3880	362XX.1109.940.FI
1410	33,9	AL, TB, TW	3000K	DA, NF	6272	4578	362XX.1409.930.FI
1410	33,9	AL, TB, TW	4000K	DA, NF	6644	4850	362XX.1409.940.FI
1690	40,7	AL, TB, TW	3000K	DA, NF	7526	5494	362XX.1609.930.FI
1690	40,7	AL, TB, TW	4000K	DA, NF	7973	5820	362XX.1609.940.FI
1970	47,5	AL, TB, TW	3000K	DA, NF	8780	6409	362XX.1909.930.FI
1970	47,5	AL, TB, TW	4000K	DA, NF	9302	6791	362XX.1909.940.FI
2250	54,2	AL, TB, TW	3000K	DA, NF	10034	7325	362XX.2209.930.FI
2250	54,2	AL, TB, TW	4000K	DA, NF	10631	7761	362XX.2209.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / PUSH Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

**ORIS NEO LS SURFACE OPAL**  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI->90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	33,6	AL, TB, TW	2700K - 6500K	TU	4234	3091	362XX.1109.92765.FI
1410	42	AL, TB, TW	2700K - 6500K	TU	5292	3863	362XX.1409.92765.FI
1690	50,4	AL, TB, TW	2700K - 6500K	TU	6350	4636	362XX.1609.92765.FI
1970	58,8	AL, TB, TW	2700K - 6500K	TU	7409	5408	362XX.1909.92765.FI
2250	67,2	AL, TB, TW	2700K - 6500K	TU	8467	6181	362XX.2209.92765.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TU	2700K - 6500K	92765	Anodized aluminium	AL
				Textured Black	TB
				Textured White	TW

**ACCESSORIES**

Joint ON/OFF ORIS NEO ON/OFF



Joint ON/OFF ORIS NEO

80304001



Joint DALI ORIS NEO  
Joint DALI ORIS NEO

DALI  
80304002