

DESCRIPTION

The ORIS NEO LINEAR SYSTEMS configuration is designed for creating continuous lines of light, with or without indirect lighting, ensuring visual uniformity and consistent performance in lengths up to 50 meters. Invisible joints and a fast electrical and mechanical connection system guarantee easy installation and a professional finish.

For solutions with different types of optics or segmented lighting, please refer to the ORIS NEO MODULAR configuration.


MOUNTING	Suspension
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	DALI / PUSH Dim, ON/OFF, Tunable White



LED FEATURES

LUMINOUS EFFICIENCY	UP TO 155 lm/W
CRI	CRI->90, Tunable White CRI->90
LIFESPAN	50.000 Hours, 72000h Tp55
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

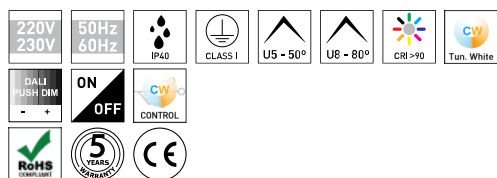

ORIS NEO LS SUSP. LG  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	31	TB, TW	3000K	DA, NF	4501	4276	363XX.11U5.930.FI
1130	31	TB, TW	3000K	DA, NF	4501	4276	363XX.11U8.930.FI
1130	31	TB, TW	4000K	DA, NF	4811	4571	363XX.11U5.940.FI
1130	31	TB, TW	4000K	DA, NF	4811	4571	363XX.11U8.940.FI
1410	38,8	TB, TW	3000K	DA, NF	5626	5345	363XX.14U5.930.FI
1410	38,8	TB, TW	3000K	DA, NF	5626	5345	363XX.14U8.930.FI
1410	38,8	TB, TW	4000K	DA, NF	6014	5713	363XX.14U5.940.FI
1410	38,8	TB, TW	4000K	DA, NF	6014	5713	363XX.14U8.940.FI
1690	46,6	TB, TW	3000K	DA, NF	6751	6414	363XX.16U5.930.FI
1690	46,6	TB, TW	3000K	DA, NF	6751	6414	363XX.16U8.930.FI
1690	46,6	TB, TW	4000K	DA, NF	7217	6856	363XX.16U5.940.FI
1690	46,6	TB, TW	4000K	DA, NF	7217	6856	363XX.16U8.940.FI
1970	54,3	TB, TW	3000K	DA, NF	7876	7483	363XX.19U5.930.FI
1970	54,3	TB, TW	3000K	DA, NF	7876	7483	363XX.19U8.930.FI
1970	54,3	TB, TW	4000K	DA, NF	8420	7999	363XX.19U5.940.FI
1970	54,3	TB, TW	4000K	DA, NF	8420	7999	363XX.19U8.940.FI
2250	62,1	TB, TW	3000K	DA, NF	9002	8552	363XX.22U5.930.FI
2250	62,1	TB, TW	3000K	DA, NF	9002	8552	363XX.22U8.930.FI
2250	62,1	TB, TW	4000K	DA, NF	9622	9141	363XX.22U5.940.FI
2250	62,1	TB, TW	4000K	DA, NF	9622	9141	363XX.22U8.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / PUSH Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured White	TW



ORIS NEO LS SUSP. LG  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	23,9	TB, TW	2700K - 6500K	TU	3463	3289	363XX.11U5.92765.FI
1130	23,9	TB, TW	2700K - 6500K	TU	3463	3289	363XX.11U8.92765.FI
1410	29,9	TB, TW	2700K - 6500K	TU	4328	4112	363XX.14U5.92765.FI
1410	29,9	TB, TW	2700K - 6500K	TU	4328	4112	363XX.14U8.92765.FI
1690	35,8	TB, TW	2700K - 6500K	TU	5194	4934	363XX.16U5.92765.FI
1690	35,8	TB, TW	2700K - 6500K	TU	5194	4934	363XX.16U8.92765.FI
1970	41,8	TB, TW	2700K - 6500K	TU	6060	5757	363XX.19U5.92765.FI
1970	41,8	TB, TW	2700K - 6500K	TU	6060	5757	363XX.19U8.92765.FI
2250	47,8	TB, TW	2700K - 6500K	TU	6925	6579	363XX.22U5.92765.FI
2250	47,8	TB, TW	2700K - 6500K	TU	6925	6579	363XX.22U8.92765.FI








SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX
Tunable White	TU

COLOR TEMP.	CT
2700K - 6500K	92765

FINISHING	FI
Textured Black	TB
Textured White	TW

ACCESSORIES

	<p>Suspension Kit Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)</p>	<p>Silver 80303017.SL 80303018.SL 80303019.SL</p>		
	<p>Ceiling Rose Surface Ceiling Rose Surface</p>	<p>Textured White 80303021.TW</p>	<p>Textured Silver 80303021.TS</p>	<p>Textured Black 80303021.TB</p>
	<p>Power Cable 0,75 Power Cable 1.5m Power Cable 3m Power Cable 5m</p>	<p>ON/OFF 80303001 80303002 80303003</p>	<p>DALI Push 80303004 80303005 80303006</p>	
	<p>Sliding suspension kit Slid. susp. kit 1.5m (1u) Slid. susp. kit 3m (1u) Slid. susp. kit 5m (1u)</p>	<p>Silver 80304012.SL 80304013.SL 80304014.SL</p>		
	<p>Ceiling Rose Recessed Ceiling Rose Recessed</p>	<p>Textured White 80303020.TW</p>	<p>Textured Silver 80303020.TS</p>	<p>Textured Black 80303020.TB</p>
	<p>Joint ON/OFF ORIS NEO Joint ON/OFF ORIS NEO</p>	<p>ON/OFF 80304001</p>		
	<p>Joint DALI ORIS NEO Joint DALI ORIS NEO</p>	<p>DALI 80304002</p>		