

DESCRIPTION

The ORIS NEO LINEAR SYSTEMS configuration is designed for creating continuous lines of light, with or without indirect lighting, ensuring visual uniformity and consistent performance in lengths up to 50 meters. Invisible joints and a fast electrical and mechanical connection system guarantee easy installation and a professional finish.

For solutions with different types of optics or segmented lighting, please refer to the ORIS NEO MODULAR configuration.


MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	DALI / Switch Dim, ON/OFF, Tunable White




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 196 lm/W
CRI	CRI->90, Tunable White CRI->90
LIFESPAN	50.000 Hours, 72000h Tp55
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

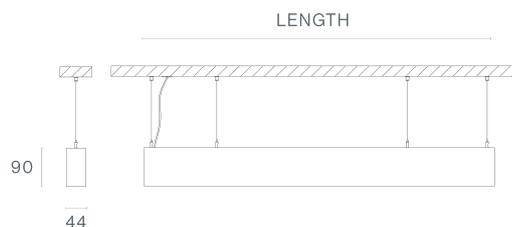

ICONOGRAPHY

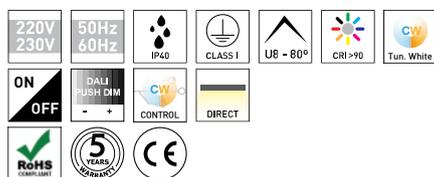

CRI->90
ORIS NEO LS SUSP. MICROPR
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	22.4	AL, TB, TW	3000K	DA, NF	4256	3405	361XX.11P8.930.FI
1130	22.4	AL, TB, TW	4000K	DA, NF	4502	3602	361XX.11P8.940.FI
1410	28	AL, TB, TW	3000K	DA, NF	5320	4256	361XX.14P8.930.FI
1410	28	AL, TB, TW	4000K	DA, NF	5628	4502	361XX.14P8.940.FI
1690	33.6	AL, TB, TW	3000K	DA, NF	6384	5107	361XX.16P8.930.FI
1690	33.6	AL, TB, TW	4000K	DA, NF	6754	5403	361XX.16P8.940.FI
1970	39.2	AL, TB, TW	3000K	DA, NF	7448	5958	361XX.19P8.930.FI
1970	39.2	AL, TB, TW	4000K	DA, NF	7879	6303	361XX.19P8.940.FI
2250	44.8	AL, TB, TW	3000K	DA, NF	8512	6810	361XX.22P8.930.FI
2250	44.8	AL, TB, TW	4000K	DA, NF	9005	7204	361XX.22P8.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

Tun. White
ORIS NEO LS SUSP. MICROPR
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI->90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	33.6	AL, TB, TW	2700K - 6500K	TU	4234	3387	361XX.11P8.92765.FI
1410	42	AL, TB, TW	2700K - 6500K	TU	5292	4234	361XX.14P8.92765.FI
1690	50.4	AL, TB, TW	2700K - 6500K	TU	6350	5080	361XX.16P8.92765.FI
1970	58.8	AL, TB, TW	2700K - 6500K	TU	7409	5927	361XX.19P8.92765.FI
2250	67.2	AL, TB, TW	2700K - 6500K	TU	8467	6774	361XX.22P8.92765.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TU	2700K - 6500K	92765	Anodized aluminium	AL
				Textured Black	TB
				Textured White	TW

ACCESSORIES

Suspension Kit Silver



Suspension kit 1,5m (1un)
Suspension kit 3 m (1un)
Suspension kit 5 m (1un)

80303017.SL
80303018.SL
80303019.SL



Ceiling Rose Surface
Ceiling Rose Surface

Textured White	Textured Silver	Textured Black
80303021.TW	80303021.TS	80303021.TB



Power Cable 0,75
Power Cable 1.5m
Power Cable 3m
Power Cable 5m

ON/Off	DALI Push
80303001	80303004
80303002	80303005
80303003	80303006



Ceiling Rose Recessed
Ceiling Rose Recessed

Textured White	Textured Silver	Textured Black
80303020.TW	80303020.TS	80303020.TB