

DESCRIPTION

The ORIS NEO LINEAR SYSTEMS configuration is designed for creating continuous lines of light, with or without indirect lighting, ensuring visual uniformity and consistent performance in lengths up to 50 meters. Invisible joints and a fast electrical and mechanical connection system guarantee easy installation and a professional finish.

For solutions with different types of optics or segmented lighting, please refer to the ORIS NEO MODULAR configuration.


MOUNTING	Suspension
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	DALI / PUSH Dim, ON/OFF, Tunable White




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 196 lm/W
CRI	CRI→90, Tunable White CRI→90
LIFESPAN	50.000 Hours, 72000h Tp55
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

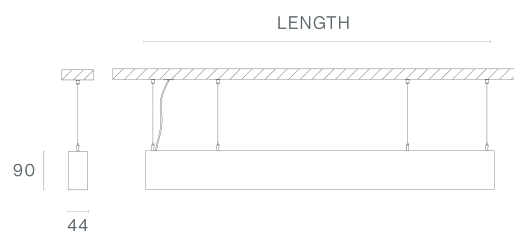

ICONOGRAPHY

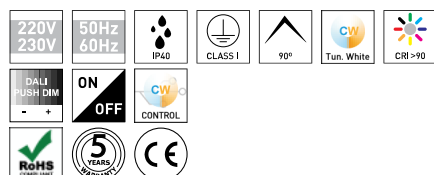

ORIS NEO LS SUSP. OPAL PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	27,1	AL, TB, TW	3000K	DA, NF	5017	3663	361XX.1109.930.FI
1130	27,1	AL, TB, TW	4000K	DA, NF	5316	3880	361XX.1109.940.FI
1410	33,9	AL, TB, TW	3000K	DA, NF	6272	4578	361XX.1409.930.FI
1410	33,9	AL, TB, TW	4000K	DA, NF	6644	4850	361XX.1409.940.FI
1690	40,7	AL, TB, TW	3000K	DA, NF	7526	5494	361XX.1609.930.FI
1690	40,7	AL, TB, TW	4000K	DA, NF	7973	5820	361XX.1609.940.FI
1970	47,5	AL, TB, TW	3000K	DA, NF	8780	6409	361XX.1909.930.FI
1970	47,5	AL, TB, TW	4000K	DA, NF	9302	6791	361XX.1909.940.FI
2250	54,2	AL, TB, TW	3000K	DA, NF	10034	7325	361XX.2209.930.FI
2250	54,2	AL, TB, TW	4000K	DA, NF	10631	7761	361XX.2209.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / PUSH Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW



ORIS NEO LS SUSP. OPAL PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	33,6	AL, TB, TW	2700K - 6500K	TU	4234	3091	361XX.1109.92765.FI
1410	42	AL, TB, TW	2700K - 6500K	TU	5292	3863	361XX.1409.92765.FI
1690	50,4	AL, TB, TW	2700K - 6500K	TU	6350	4636	361XX.1609.92765.FI
1970	58,8	AL, TB, TW	2700K - 6500K	TU	7409	5408	361XX.1909.92765.FI
2250	67,2	AL, TB, TW	2700K - 6500K	TU	8467	6181	361XX.2209.92765.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TU	2700K - 6500K	92765	Anodized aluminium	AL
				Textured Black	TB
				Textured White	TW

ACCESSORIES

Suspension Kit

Silver



Suspension kit 1,5m (1un)
Suspension kit 3 m (1un)
Suspension kit 5 m (1un)

80303017.SL
80303018.SL
80303019.SL



Ceiling Rose Surface
Ceiling Rose Surface

Textured White Textured Silver Textured Black
80303021.TW 80303021.TS 80303021.TB



Clear Power Cable
Power Cable 1.5m
Power Cable 3m
Power Cable 5m

ON/OFF	DALI Push
80303001	80303004
80303002	80303005
80303003	80303006



Sliding suspension kit
Slid. susp. kit 1.5m (1u)
Slid. susp. kit 3m (1u)
Slid. susp. kit 5m (1u)

Silver
80304012.SL
80304013.SL
80304014.SL



Ceiling Rose Recessed
Ceiling Rose Recessed

Textured White Textured Silver Textured Black
80303020.TW 80303020.TS 80303020.TB



Joint ON/OFF ORIS NEO
Joint ON/OFF ORIS NEO

ON/OFF
80304001



Joint DALI ORIS NEO
Joint DALI ORIS NEO

DALI
80304002