

DESCRIPTION

ORIS NEO is designed to offer maximum flexibility and performance in technical and architectural lighting projects. It is available in direct or direct/indirect (D/I) lighting versions, allowing the light distribution to be adjusted according to function and ambiance.

The range is divided into three main configurations, with lengths, applications, and accessories adaptable to every need:

ORIS NEO (Individual Modules), ORIS NEO LINEAR SYSTEMS, and ORIS NEO MODULAR.

Available in lengths from 570 mm up to 5090 mm in a single piece, without joints.

Options include opal and microprismatic diffusers, low-glare square or round lenses in various colors.

CRI →90 ensures accurate and faithful color rendering.

Offers the Tunable White option, allowing adjustment of the color temperature according to the needs of the space.


MOUNTING	Suspension
LIGHT DISTRIBUTION	Directa e Indirecta
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI / PUSH Dim, ON/OFF, Tunable White



LED FEATURES

LUMINOUS EFFICIENCY	UP TO 164 lm/W
CRI	CRI→90, Tunable White CRI→90
LIFESPAN	72000h Tp55, 50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

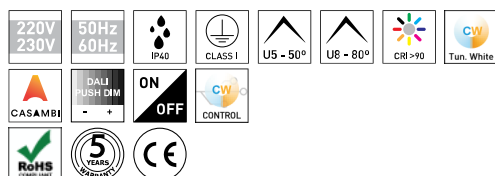



ORIS NEO D/I L.GLARE+OPAL
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	27,7	TB, TW	3000K	CS, DA, NF	4251	3820	521XX.08U5.930.FI
850	27,7	TB, TW	3000K	CS, DA, NF	4251	3820	521XX.08U8.930.FI
850	27,7	TB, TW	4000K	CS, DA, NF	4532	4075	521XX.08U5.940.FI
850	27,7	TB, TW	4000K	CS, DA, NF	4532	4075	521XX.08U8.940.FI
1130	37,6	TB, TW	3000K	CS, DA, NF	5814	5195	521XX.11U5.930.FI
1130	37,6	TB, TW	3000K	CS, DA, NF	5814	5195	521XX.11U8.930.FI
1130	37,6	TB, TW	4000K	CS, DA, NF	6197	5541	521XX.11U5.940.FI
1130	37,6	TB, TW	4000K	CS, DA, NF	6197	5541	521XX.11U8.940.FI
1410	47,6	TB, TW	3000K	CS, DA, NF	7377	6571	521XX.14U5.930.FI
1410	47,6	TB, TW	3000K	CS, DA, NF	7377	6571	521XX.14U8.930.FI
1410	47,6	TB, TW	4000K	CS, DA, NF	7862	7007	521XX.14U5.940.FI
1410	47,6	TB, TW	4000K	CS, DA, NF	7862	7007	521XX.14U8.940.FI
1690	57,6	TB, TW	3000K	CS, DA, NF	8940	7946	521XX.16U5.930.FI
1690	57,6	TB, TW	3000K	CS, DA, NF	8940	7946	521XX.16U8.930.FI
1690	57,6	TB, TW	4000K	CS, DA, NF	9527	8473	521XX.16U5.940.FI
1690	57,6	TB, TW	4000K	CS, DA, NF	9527	8473	521XX.16U8.940.FI
1970	67,5	TB, TW	3000K	CS, DA, NF	10503	9321	521XX.19U5.930.FI
1970	67,5	TB, TW	3000K	CS, DA, NF	10503	9321	521XX.19U8.930.FI
1970	67,5	TB, TW	4000K	CS, DA, NF	11192	9939	521XX.19U5.940.FI
1970	67,5	TB, TW	4000K	CS, DA, NF	11192	9939	521XX.19U8.940.FI
2250	75,3	TB, TW	3000K	CS, DA, NF	11628	10390	521XX.22U5.930.FI
2250	75,3	TB, TW	3000K	CS, DA, NF	11628	10390	521XX.22U8.930.FI
2250	75,3	TB, TW	4000K	CS, DA, NF	12394	11082	521XX.22U5.940.FI
2250	75,3	TB, TW	4000K	CS, DA, NF	12394	11082	521XX.22U8.940.FI
2530	83	TB, TW	3000K	CS, DA, NF	12754	11459	521XX.25U5.930.FI
2530	83	TB, TW	3000K	CS, DA, NF	12754	11459	521XX.25U8.930.FI
2530	83	TB, TW	4000K	CS, DA, NF	13597	12224	521XX.25U5.940.FI
2530	83	TB, TW	4000K	CS, DA, NF	13597	12224	521XX.25U8.940.FI
2810	95,2	TB, TW	3000K	CS, DA, NF	14754	13141	521XX.28U5.930.FI
2810	95,2	TB, TW	3000K	CS, DA, NF	14754	13141	521XX.28U8.930.FI
2810	95,2	TB, TW	4000K	CS, DA, NF	15724	14014	521XX.28U5.940.FI
2810	95,2	TB, TW	4000K	CS, DA, NF	15724	14014	521XX.28U8.940.FI
3090	103	TB, TW	3000K	CS, DA, NF	15880	14210	521XX.30U5.930.FI
3090	103	TB, TW	3000K	CS, DA, NF	15880	14210	521XX.30U8.930.FI
3090	103	TB, TW	4000K	CS, DA, NF	16927	15156	521XX.30U5.940.FI
3090	103	TB, TW	4000K	CS, DA, NF	16927	15156	521XX.30U8.940.FI

SELECT YOUR PREFERRED
 OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
CASAMBI	CS	3000K	30	Textured Black	TB
DALI / PUSH Dim ON/OFF	DA NF	4000K	40	Textured White	TW



ORIS NEO D/I L.GLARE+OPAL
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1410	46,7	TB, TW	2700K - 6500K	TU	6445	5657	521XX.14U5.92765.FI
1410	46,7	TB, TW	2700K - 6500K	TU	6445	5657	521XX.14U8.92765.FI
1690	56,8	TB, TW	2700K - 6500K	TU	7840	6866	521XX.16U5.92765.FI
1690	56,8	TB, TW	2700K - 6500K	TU	7840	6866	521XX.16U8.92765.FI
1970	67	TB, TW	2700K - 6500K	TU	9235	8074	521XX.19U5.92765.FI
1970	67	TB, TW	2700K - 6500K	TU	9235	8074	521XX.19U8.92765.FI
2250	73	TB, TW	2700K - 6500K	TU	10100	8897	521XX.22U5.92765.FI
2250	73	TB, TW	2700K - 6500K	TU	10100	8897	521XX.22U8.92765.FI
2530	78,9	TB, TW	2700K - 6500K	TU	10966	9719	521XX.25U5.92765.FI
2530	78,9	TB, TW	2700K - 6500K	TU	10966	9719	521XX.25U8.92765.FI

SELECT YOUR PREFERRED
 OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TU	2700K - 6500K	92765	Textured Black	TB
				Textured White	TW

ACCESSORIES



Suspension Kit
 Suspension kit 1,5m (1un)
 Suspension kit 3 m (1un)
 Suspension kit 5 m (1un)

Silver
 80303017.SL
 80303018.SL
 80303019.SL



Ceiling Rose Surface
 Ceiling Rose Surface

Textured White Textured Silver Textured Black
 80303021.TW 80303021.TS 80303021.TB



Power Cable 0,75
 Power Cable 1.5m
 Power Cable 3m
 Power Cable 5m

ON/OFF	DALI Push
80303001	80303004
80303002	80303005
80303003	80303006



Sliding suspension kit
 Slid. susp. kit 1.5m (1u)
 Slid. susp. kit 3m (1u)
 Slid. susp. kit 5m (1u)

Silver
 80304012.SL
 80304013.SL
 80304014.SL



Ceiling Rose Recessed
 Ceiling Rose Recessed

Textured White	Textured Silver	Textured Black
80303020.TW	80303020.TS	80303020.TB