

DESCRIPTION

ORIS NEO is designed to offer maximum flexibility and performance in technical and architectural lighting projects. It is available in direct or direct/indirect (D/I) lighting versions, allowing the light distribution to be adjusted according to function and ambiance.

The range is divided into three main configurations, with lengths, applications, and accessories adaptable to every need:

ORIS NEO (Individual Modules), ORIS NEO LINEAR SYSTEMS, and ORIS NEO MODULAR.


Available in lengths from 570 mm up to 5090 mm in a single piece, without joints.

Options include opal and microprismatic diffusers, low-glare square or round lenses in various colors.

CRI →90 ensures accurate and faithful color rendering.


Offers the Tunable White option, allowing adjustment of the color temperature according to the needs of the space.

MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Directa e Indirecta
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF, Tunable White

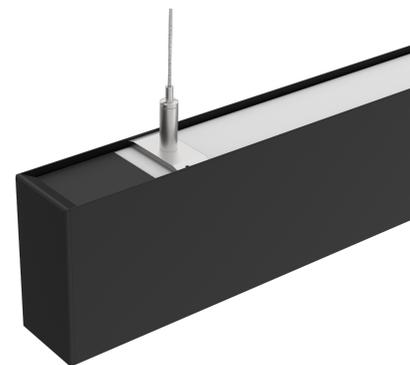
LED FEATURES

LUMINOUS EFFICIENCY	UP TO 199 lm/W
CRI	CRI→90, Tunable White CRI→90
LIFESPAN	50.000 Hours, 72000h Tp55
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

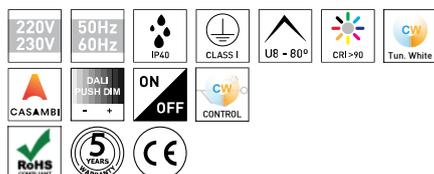



ORIS NEO D/I MICROPR+OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
850	21.2	AL, TB, TW	3000K	CS, DA, NF	4068	3193	520XX.08P8.930.FI
850	21.2	AL, TB, TW	4000K	CS, DA, NF	4301	3376	520XX.08P8.940.FI
1130	29	AL, TB, TW	3000K	CS, DA, NF	5569	4364	520XX.11P8.930.FI
1130	29	AL, TB, TW	4000K	CS, DA, NF	5888	4614	520XX.11P8.940.FI
1410	36.8	AL, TB, TW	3000K	CS, DA, NF	7071	5534	520XX.14P8.930.FI
1410	36.8	AL, TB, TW	4000K	CS, DA, NF	7476	5851	520XX.14P8.940.FI
1690	44.6	AL, TB, TW	3000K	CS, DA, NF	8573	6705	520XX.16P8.930.FI
1690	44.6	AL, TB, TW	4000K	CS, DA, NF	9064	7089	520XX.16P8.940.FI
1970	52.4	AL, TB, TW	3000K	CS, DA, NF	10075	7876	520XX.19P8.930.FI
1970	52.4	AL, TB, TW	4000K	CS, DA, NF	10651	8327	520XX.19P8.940.FI
2250	58	AL, TB, TW	3000K	CS, DA, NF	11139	8727	520XX.22P8.930.FI
2250	58	AL, TB, TW	4000K	CS, DA, NF	11777	9227	520XX.22P8.940.FI
2530	63.6	AL, TB, TW	3000K	CS, DA, NF	12203	9578	520XX.25P8.930.FI
2530	63.6	AL, TB, TW	4000K	CS, DA, NF	12902	10128	520XX.25P8.940.FI
2810	73.6	AL, TB, TW	3000K	CS, DA, NF	14142	11069	520XX.28P8.930.FI
2810	73.6	AL, TB, TW	4000K	CS, DA, NF	14952	11703	520XX.28P8.940.FI
3090	79.2	AL, TB, TW	3000K	CS, DA, NF	15206	11920	520XX.30P8.930.FI
3090	79.2	AL, TB, TW	4000K	CS, DA, NF	16078	12603	520XX.30P8.940.FI
3370	89.2	AL, TB, TW	3000K	CS, DA, NF	17146	13410	520XX.33P8.930.FI
3370	89.2	AL, TB, TW	4000K	CS, DA, NF	18127	14178	520XX.33P8.940.FI
3930	104.8	AL, TB, TW	3000K	CS, DA, NF	20150	15752	520XX.39P8.930.FI
3930	104.8	AL, TB, TW	4000K	CS, DA, NF	21302	16654	520XX.39P8.940.FI
4490	116	AL, TB, TW	3000K	CS, DA, NF	22278	17454	520XX.44P8.930.FI
4490	116	AL, TB, TW	4000K	CS, DA, NF	23554	18455	520XX.44P8.940.FI
5050	136	AL, TB, TW	3000K	CS, DA, NF	26157	20435	520XX.50P8.930.FI
5050	136	AL, TB, TW	4000K	CS, DA, NF	27653	21605	520XX.50P8.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
CASAMBI	CS	3000K	30	Anodized aluminium	AL
DALI / Switch Dim ON/OFF	DA NF	4000K	40	Textured Black Textured White	TB TW



ORIS NEO D/I MICROPR+OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1410	58.8	AL, TB, TW	2700K - 6500K	TU	7409	5779	520XX.14P8.92765.FI
1690	71.4	AL, TB, TW	2700K - 6500K	TU	8996	7012	520XX.16P8.92765.FI
1970	84	AL, TB, TW	2700K - 6500K	TU	10584	8245	520XX.19P8.92765.FI
2250	92.4	AL, TB, TW	2700K - 6500K	TU	11642	9092	520XX.22P8.92765.FI
2530	100.8	AL, TB, TW	2700K - 6500K	TU	12701	9938	520XX.25P8.92765.FI
2810	117.6	AL, TB, TW	2700K - 6500K	TU	14818	11558	520XX.28P8.92765.FI
3090	126	AL, TB, TW	2700K - 6500K	TU	15876	12404	520XX.30P8.92765.FI
3370	142.8	AL, TB, TW	2700K - 6500K	TU	17993	14024	520XX.33P8.92765.FI
3930	168	AL, TB, TW	2700K - 6500K	TU	21168	16490	520XX.39P8.92765.FI
4490	184.8	AL, TB, TW	2700K - 6500K	TU	23285	18183	520XX.44P8.92765.FI
5050	218.4	AL, TB, TW	2700K - 6500K	TU	27518	21422	520XX.50P8.92765.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TU	2700K - 6500K	92765	Anodized aluminium Textured Black Textured White	AL TB TW

ACCESSORIES



Suspension Kit
Suspension kit 1,5m (1un) 80303017.SL
Suspension kit 3 m (1un) 80303018.SL
Suspension kit 5 m (1un) 80303019.SL

Silver
80303017.SL
80303018.SL
80303019.SL



Ceiling Rose Surface
Ceiling Rose Surface
Textured White 80303021.TW
Textured Silver 80303021.TS
Textured Black 80303021.TB

Textured White 80303021.TW
Textured Silver 80303021.TS
Textured Black 80303021.TB



Power Cable 0,75
Power Cable 1.5m
Power Cable 3m
Power Cable 5m
ON/OFF 80303001
DALI Push 80303004
80303002 80303005
80303003 80303006

ON/OFF 80303001
DALI Push 80303004
80303002 80303005
80303003 80303006



Sliding suspension kit
Slid. susp. kit 1.5m (1u)
Slid. susp. kit 3m (1u)
Slid. susp. kit 5m (1u)

Silver
80304012.SL
80304013.SL
80304014.SL



Ceiling Rose Recessed
Ceiling Rose Recessed

Textured White Textured Silver Textured Black
80303020.TW 80303020.TS 80303020.TB