

DESCRIPTION

ORIS NEO is designed to offer maximum flexibility and performance in technical and architectural lighting projects. It is available in direct or direct/indirect (D/I) lighting versions, allowing the light distribution to be adjusted according to function and ambiance.

The range is divided into three main configurations, with lengths, applications, and accessories adaptable to every need:

ORIS NEO (Individual Modules), ORIS NEO LINEAR SYSTEMS, and ORIS NEO MODULAR.


Available in lengths from 570 mm up to 5090 mm in a single piece, without joints.

Options include opal and microprismatic diffusers, low-glare square or round lenses in various colors.

CRI →90 ensures accurate and faithful color rendering.

Offers the Tunable White option, allowing adjustment of the color temperature according to the needs of the space.


MOUNTING	Suspension
LIGHT DISTRIBUTION	Directa e Indirecta
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	CASAMBI, DALI / PUSH Dim, ON/OFF, Tunable White

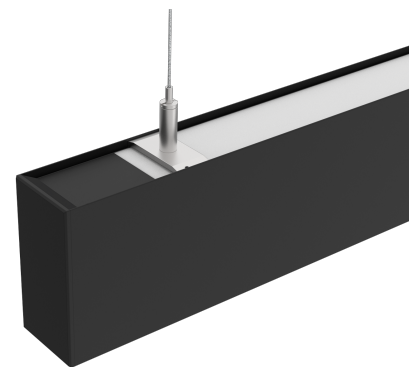

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 199 lm/W
CRI	CRI→90, Tunable White CRI→90
LIFESPAN	50.000 Hours, 72000h Tp55
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

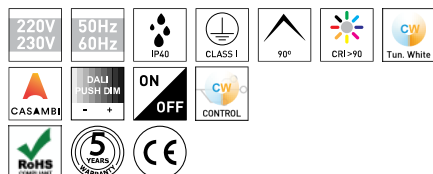



ORIS NEO D/I OPAL+OPAL  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	24,7	AL, TB, TW	3000K	CS, DA, NF	4639	3386	520XX.0809.930.FI
850	24,7	AL, TB, TW	4000K	CS, DA, NF	4911	3585	520XX.0809.940.FI
1130	33,7	AL, TB, TW	3000K	CS, DA, NF	6331	4621	520XX.1109.930.FI
1130	33,7	AL, TB, TW	4000K	CS, DA, NF	6702	4892	520XX.1109.940.FI
1410	42,7	AL, TB, TW	3000K	CS, DA, NF	8023	5857	520XX.1409.930.FI
1410	42,7	AL, TB, TW	4000K	CS, DA, NF	8492	6199	520XX.1409.940.FI
1690	51,7	AL, TB, TW	3000K	CS, DA, NF	9715	7092	520XX.1609.930.FI
1690	51,7	AL, TB, TW	4000K	CS, DA, NF	10283	7507	520XX.1609.940.FI
1970	60,7	AL, TB, TW	3000K	CS, DA, NF	11407	8327	520XX.1909.930.FI
1970	60,7	AL, TB, TW	4000K	CS, DA, NF	12074	8814	520XX.1909.940.FI
2250	67,4	AL, TB, TW	3000K	CS, DA, NF	12661	9243	520XX.2209.930.FI
2250	67,4	AL, TB, TW	4000K	CS, DA, NF	13403	9784	520XX.2209.940.FI
2530	74,2	AL, TB, TW	3000K	CS, DA, NF	13916	10158	520XX.2509.930.FI
2530	74,2	AL, TB, TW	4000K	CS, DA, NF	14732	10754	520XX.2509.940.FI
2810	85,4	AL, TB, TW	3000K	CS, DA, NF	16045	11713	520XX.2809.930.FI
2810	85,4	AL, TB, TW	4000K	CS, DA, NF	16985	12399	520XX.2809.940.FI
3090	92,2	AL, TB, TW	3000K	CS, DA, NF	17300	12629	520XX.3009.930.FI
3090	92,2	AL, TB, TW	4000K	CS, DA, NF	18314	13369	520XX.3009.940.FI
3370	103,4	AL, TB, TW	3000K	CS, DA, NF	19430	14184	520XX.3309.930.FI
3370	103,4	AL, TB, TW	4000K	CS, DA, NF	20567	15014	520XX.3309.940.FI
3930	121,3	AL, TB, TW	3000K	CS, DA, NF	22814	16654	520XX.3909.930.FI
3930	121,3	AL, TB, TW	4000K	CS, DA, NF	24148	17628	520XX.3909.940.FI
4490	134,9	AL, TB, TW	3000K	CS, DA, NF	25322	18485	520XX.4409.930.FI
4490	134,9	AL, TB, TW	4000K	CS, DA, NF	26806	19568	520XX.4409.940.FI
5050	157,2	AL, TB, TW	3000K	CS, DA, NF	29582	21595	520XX.5009.930.FI
5050	157,2	AL, TB, TW	4000K	CS, DA, NF	31312	22858	520XX.5009.940.FI

SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
CASAMBI	CS	3000K	30	Anodized aluminium	AL
DALI / PUSH Dim	DA	4000K	40	Textured Black	TB
ON/OFF	NF			Textured White	TW



ORIS NEO D/I OPAL+OPAL  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1410	58,8	AL, TB, TW	2700K - 6500K	TU	7409	5408	520XX.1409.92765.FI
1690	71,4	AL, TB, TW	2700K - 6500K	TU	8996	6567	520XX.1609.92765.FI
1970	84	AL, TB, TW	2700K - 6500K	TU	10584	7726	520XX.1909.92765.FI
2250	92,4	AL, TB, TW	2700K - 6500K	TU	11642	8499	520XX.2209.92765.FI
2530	100,8	AL, TB, TW	2700K - 6500K	TU	12701	9272	520XX.2509.92765.FI
2810	117,6	AL, TB, TW	2700K - 6500K	TU	14818	10817	520XX.2809.92765.FI
3090	126	AL, TB, TW	2700K - 6500K	TU	15876	11589	520XX.3009.92765.FI
3370	142,8	AL, TB, TW	2700K - 6500K	TU	17993	13135	520XX.3309.92765.FI
3930	168	AL, TB, TW	2700K - 6500K	TU	21168	15453	520XX.3909.92765.FI
4490	184,8	AL, TB, TW	2700K - 6500K	TU	23285	16998	520XX.4409.92765.FI
5050	218,4	AL, TB, TW	2700K - 6500K	TU	27518	20088	520XX.5009.92765.FI

SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TU	2700K - 6500K	92765	Anodized aluminium	AL
				Textured Black	TB
				Textured White	TW

ACCESSORIES



Suspension Kit  
Suspension kit 1,5m (1un) 80303017.SL  
Suspension kit 3 m (1un) 80303018.SL  
Suspension kit 5 m (1un) 80303019.SL

Silver  
80303017.SL  
80303018.SL  
80303019.SL



Ceiling Rose Surface  
Ceiling Rose Surface  
Textured White 80303021.TW  
Textured Silver 80303021.TS  
Textured Black 80303021.TB



Power Cable 0,75  
Power Cable 1.5m  
Power Cable 3m  
Power Cable 5m  
ON/OFF 80303001  
DALI Push 80303004  
80303002  
80303005  
80303003  
80303006



Sliding suspension kit  
 Slid. susp. kit 1.5m (1u)  
 Slid. susp. kit 3m (1u)  
 Slid. susp. kit 5m (1u)

Silver  
 80304012.SL  
 80304013.SL  
 80304014.SL



Ceiling Rose Recessed  
 Ceiling Rose Recessed

Textured White    Textured Silver    Textured Black  
 80303020.TW    80303020.TS    80303020.TB