

DESCRIPTION

ORIS NEO is designed to offer maximum flexibility and performance in technical and architectural lighting projects. It is available in direct or direct/indirect (D/I) lighting versions, allowing the light distribution to be adjusted according to function and ambiance.

The range is divided into three main configurations, with lengths, applications, and accessories adaptable to every need:

ORIS NEO (Individual Modules), ORIS NEO LINEAR SYSTEMS, and ORIS NEO MODULAR.

Available in lengths from 570 mm up to 5090 mm in a single piece, without joints.

Options include opal and microprismatic diffusers, low-glare square or round lenses in various colors.

CRI →90 ensures accurate and faithful color rendering.



Offers the Tunable White option, allowing adjustment of the color temperature according to the needs of the space.

MOUNTING	Suspension
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	CASAMBI, DALI / PUSH Dim, ON/OFF, Tunable White


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 196 lm/W
CRI	CRI→90, Tunable White CRI→90
LIFESPAN	50.000 Hours, 72000h Tp55
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

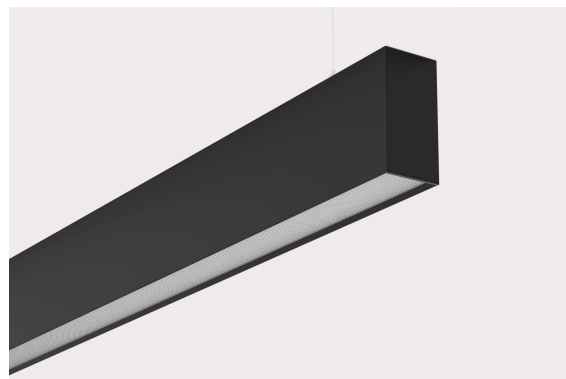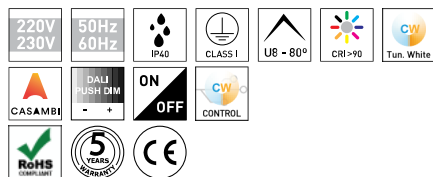

TECHNICAL DRAWING

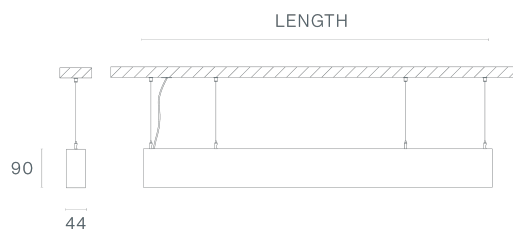



ORIS NEO SUSPENDED MICROP
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
570	11,2	AL, TB, TW	3000K	CS, DA, NF	2128	1702	357XX.05P8.930.FI
570	11,2	AL, TB, TW	4000K	CS, DA, NF	2251	1801	357XX.05P8.940.FI
850	16,8	AL, TB, TW	3000K	CS, DA, NF	3192	2554	357XX.08P8.930.FI
850	16,8	AL, TB, TW	4000K	CS, DA, NF	3377	2701	357XX.08P8.940.FI
1130	22,4	AL, TB, TW	3000K	CS, DA, NF	4256	3405	357XX.11P8.930.FI
1130	22,4	AL, TB, TW	4000K	CS, DA, NF	4502	3602	357XX.11P8.940.FI
1410	28	AL, TB, TW	3000K	CS, DA, NF	5320	4256	357XX.14P8.930.FI
1410	28	AL, TB, TW	4000K	CS, DA, NF	5628	4502	357XX.14P8.940.FI
1690	33,6	AL, TB, TW	3000K	CS, DA, NF	6384	5107	357XX.16P8.930.FI
1690	33,6	AL, TB, TW	4000K	CS, DA, NF	6754	5403	357XX.16P8.940.FI
1970	39,2	AL, TB, TW	3000K	CS, DA, NF	7448	5958	357XX.19P8.930.FI
1970	39,2	AL, TB, TW	4000K	CS, DA, NF	7879	6303	357XX.19P8.940.FI
2250	44,8	AL, TB, TW	3000K	CS, DA, NF	8512	6810	357XX.22P8.930.FI
2250	44,8	AL, TB, TW	4000K	CS, DA, NF	9005	7204	357XX.22P8.940.FI
2530	50,4	AL, TB, TW	3000K	CS, DA, NF	9576	7661	357XX.25P8.930.FI
2530	50,4	AL, TB, TW	4000K	CS, DA, NF	10130	8104	357XX.25P8.940.FI
2810	56	AL, TB, TW	3000K	CS, DA, NF	10640	8512	357XX.28P8.930.FI
2810	56	AL, TB, TW	4000K	CS, DA, NF	11256	9005	357XX.28P8.940.FI
3090	61,6	AL, TB, TW	3000K	CS, DA, NF	11704	9363	357XX.30P8.930.FI
3090	61,6	AL, TB, TW	4000K	CS, DA, NF	12382	9905	357XX.30P8.940.FI
3370	67,2	AL, TB, TW	3000K	CS, DA, NF	12768	10214	357XX.33P8.930.FI
3370	67,2	AL, TB, TW	4000K	CS, DA, NF	13507	10806	357XX.33P8.940.FI
3930	78,4	AL, TB, TW	3000K	CS, DA, NF	14896	11917	357XX.39P8.930.FI
3930	78,4	AL, TB, TW	4000K	CS, DA, NF	15758	12607	357XX.39P8.940.FI
4490	89,6	AL, TB, TW	3000K	CS, DA, NF	17024	13619	357XX.44P8.930.FI
4490	89,6	AL, TB, TW	4000K	CS, DA, NF	18010	14408	357XX.44P8.940.FI
5050	100,8	AL, TB, TW	3000K	CS, DA, NF	19152	15322	357XX.50P8.930.FI
5050	100,8	AL, TB, TW	4000K	CS, DA, NF	20261	16209	357XX.50P8.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
CASAMBI	CS	3000K	30	Anodized aluminium	AL
DALI / PUSH Dim	DA	4000K	40	Textured Black	TB
ON/OFF	NF			Textured White	TW



ORIS NEO SUSPENDED MICROP
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	25,2	AL, TB, TW	2700K - 6500K	TU	3175	2540	357XX.08P8.92765.FI
1130	33,6	AL, TB, TW	2700K - 6500K	TU	4234	3387	357XX.11P8.92765.FI
1410	42	AL, TB, TW	2700K - 6500K	TU	5292	4234	357XX.14P8.92765.FI
1690	50,4	AL, TB, TW	2700K - 6500K	TU	6350	5080	357XX.16P8.92765.FI
1970	58,8	AL, TB, TW	2700K - 6500K	TU	7409	5927	357XX.19P8.92765.FI
2250	67,2	AL, TB, TW	2700K - 6500K	TU	8467	6774	357XX.22P8.92765.FI
2530	75,6	AL, TB, TW	2700K - 6500K	TU	9526	7620	357XX.25P8.92765.FI
2810	84	AL, TB, TW	2700K - 6500K	TU	10584	8467	357XX.28P8.92765.FI
3090	92,4	AL, TB, TW	2700K - 6500K	TU	11642	9314	357XX.30P8.92765.FI
3370	100,8	AL, TB, TW	2700K - 6500K	TU	12701	10161	357XX.33P8.92765.FI
3930	117,6	AL, TB, TW	2700K - 6500K	TU	14818	11854	357XX.39P8.92765.FI
4490	134,4	AL, TB, TW	2700K - 6500K	TU	16934	13548	357XX.44P8.92765.FI
5050	151,2	AL, TB, TW	2700K - 6500K	TU	19051	15241	357XX.50P8.92765.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TU	2700K - 6500K	92765	Anodized aluminium	AL
				Textured Black	TB
				Textured White	TW

ACCESSORIES



Suspension Kit
Suspension kit 1,5m (1un) 80303017.SL
Suspension kit 3 m (1un) 80303018.SL
Suspension kit 5 m (1un) 80303019.SL

Silver
80303017.SL
80303018.SL
80303019.SL



Ceiling Rose Surface
Ceiling Rose Surface
Textured White 80303021.TW
Textured Silver 80303021.TS
Textured Black 80303021.TB

Power Cable 0,75
Power Cable 1.5m
ON/OFF 80303001
DALI Push 80303004



Power Cable 3m
 Power Cable 5m

80303002	80303005
80303003	80303006



Sliding suspension kit
 Slid. susp. kit 1.5m (1u)
 Slid. susp. kit 3m (1u)
 Slid. susp. kit 5m (1u)

Silver
 80304012.SL
 80304013.SL
 80304014.SL



Ceiling Rose Recessed
 Ceiling Rose Recessed

Textured White	Textured Silver	Textured Black
80303020.TW	80303020.TS	80303020.TB