

DESCRIPTION

ORIS NEO is designed to offer maximum flexibility and performance in technical and architectural lighting projects. It is available in direct or direct/indirect (D/I) lighting versions, allowing the light distribution to be adjusted according to function and ambiance.

The range is divided into three main configurations, with lengths, applications, and accessories adaptable to every need:

ORIS NEO (Individual Modules), ORIS NEO LINEAR SYSTEMS, and ORIS NEO MODULAR.

Available in lengths from 570 mm up to 5090 mm in a single piece, without joints.

Options include opal and microprismatic diffusers, low-glare square or round lenses in various colors.

CRI →90 ensures accurate and faithful color rendering.



Offers the Tunable White option, allowing adjustment of the color temperature according to the needs of the space.

MOUNTING	Suspension
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	CASAMBI, DALI / PUSH Dim, ON/OFF, Tunable White


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 196 lm/W
CRI	CRI→90, Tunable White CRI→90
LIFESPAN	50.000 Hours, 72000h Tp55
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

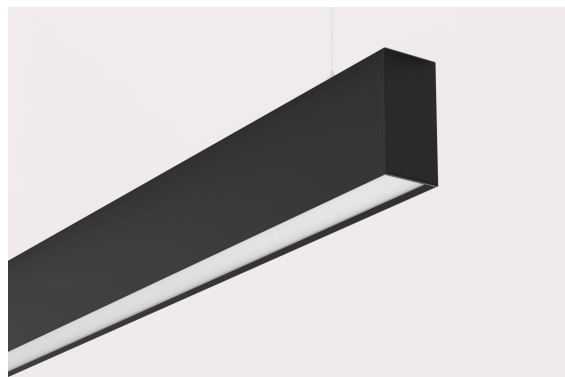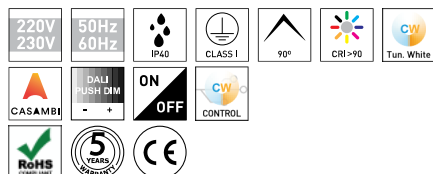

TECHNICAL DRAWING

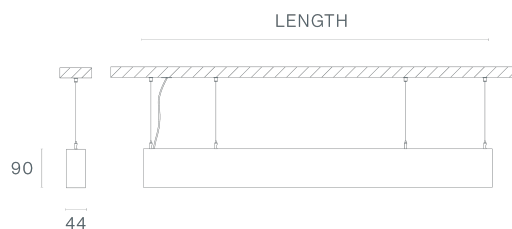



ORIS NEO SUSPENDED OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
570	13,6	AL, TB, TW	3000K	CS, DA, NF	2509	1831	357XX.0509.930.FI
570	13,6	AL, TB, TW	4000K	CS, DA, NF	2658	1940	357XX.0509.940.FI
850	20,3	AL, TB, TW	3000K	CS, DA, NF	3763	2747	357XX.0809.930.FI
850	20,3	AL, TB, TW	4000K	CS, DA, NF	3987	2910	357XX.0809.940.FI
1130	27,1	AL, TB, TW	3000K	CS, DA, NF	5017	3663	357XX.1109.930.FI
1130	27,1	AL, TB, TW	4000K	CS, DA, NF	5316	3880	357XX.1109.940.FI
1410	33,9	AL, TB, TW	3000K	CS, DA, NF	6272	4578	357XX.1409.930.FI
1410	33,9	AL, TB, TW	4000K	CS, DA, NF	6644	4850	357XX.1409.940.FI
1690	40,7	AL, TB, TW	3000K	CS, DA, NF	7526	5494	357XX.1609.930.FI
1690	40,7	AL, TB, TW	4000K	CS, DA, NF	7973	5820	357XX.1609.940.FI
1970	47,5	AL, TB, TW	3000K	CS, DA, NF	8780	6409	357XX.1909.930.FI
1970	47,5	AL, TB, TW	4000K	CS, DA, NF	9302	6791	357XX.1909.940.FI
2250	54,2	AL, TB, TW	3000K	CS, DA, NF	10034	7325	357XX.2209.930.FI
2250	54,2	AL, TB, TW	4000K	CS, DA, NF	10631	7761	357XX.2209.940.FI
2530	61	AL, TB, TW	3000K	CS, DA, NF	11289	8241	357XX.2509.930.FI
2530	61	AL, TB, TW	4000K	CS, DA, NF	11960	8731	357XX.2509.940.FI
2810	67,8	AL, TB, TW	3000K	CS, DA, NF	12543	9156	357XX.2809.930.FI
2810	67,8	AL, TB, TW	4000K	CS, DA, NF	13289	9701	357XX.2809.940.FI
3090	74,6	AL, TB, TW	3000K	CS, DA, NF	13797	10072	357XX.3009.930.FI
3090	74,6	AL, TB, TW	4000K	CS, DA, NF	14618	10671	357XX.3009.940.FI
3370	81,4	AL, TB, TW	3000K	CS, DA, NF	15052	10988	357XX.3309.930.FI
3370	81,4	AL, TB, TW	4000K	CS, DA, NF	15947	11641	357XX.3309.940.FI
3930	94,9	AL, TB, TW	3000K	CS, DA, NF	17560	12819	357XX.3909.930.FI
3930	94,9	AL, TB, TW	4000K	CS, DA, NF	18604	13581	357XX.3909.940.FI
4490	108,5	AL, TB, TW	3000K	CS, DA, NF	20069	14650	357XX.4409.930.FI
4490	108,5	AL, TB, TW	4000K	CS, DA, NF	21262	15521	357XX.4409.940.FI
5050	122	AL, TB, TW	3000K	CS, DA, NF	22577	16482	357XX.5009.930.FI
5050	122	AL, TB, TW	4000K	CS, DA, NF	23920	17461	357XX.5009.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
CASAMBI	CS	3000K	30	Anodized aluminium	AL
DALI / PUSH Dim	DA	4000K	40	Textured Black	TB
ON/OFF	NF			Textured White	TW



ORIS NEO SUSPENDED OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	25,2	AL, TB, TW	2700K - 6500K	TU	3175	2318	357XX.0809.92765.FI
1130	33,6	AL, TB, TW	2700K - 6500K	TU	4234	3091	357XX.1109.92765.FI
1410	42	AL, TB, TW	2700K - 6500K	TU	5292	3863	357XX.1409.92765.FI
1690	50,4	AL, TB, TW	2700K - 6500K	TU	6350	4636	357XX.1609.92765.FI
1970	58,8	AL, TB, TW	2700K - 6500K	TU	7409	5408	357XX.1909.92765.FI
2250	67,2	AL, TB, TW	2700K - 6500K	TU	8467	6181	357XX.2209.92765.FI
2530	75,6	AL, TB, TW	2700K - 6500K	TU	9526	6954	357XX.2509.92765.FI
2810	84	AL, TB, TW	2700K - 6500K	TU	10584	7726	357XX.2809.92765.FI
3090	92,4	AL, TB, TW	2700K - 6500K	TU	11642	8499	357XX.3009.92765.FI
3370	100,8	AL, TB, TW	2700K - 6500K	TU	12701	9272	357XX.3309.92765.FI
3930	117,6	AL, TB, TW	2700K - 6500K	TU	14818	10817	357XX.3909.92765.FI
4490	134,4	AL, TB, TW	2700K - 6500K	TU	16934	12362	357XX.4409.92765.FI
5050	151,2	AL, TB, TW	2700K - 6500K	TU	19051	13907	357XX.5009.92765.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TU	2700K - 6500K	92765	Anodized aluminium	AL
				Textured Black	TB
				Textured White	TW

ACCESSORIES



Suspension Kit
Suspension kit 1,5m (1un) 80303017.SL
Suspension kit 3 m (1un) 80303018.SL
Suspension kit 5 m (1un) 80303019.SL

Silver
80303017.SL
80303018.SL
80303019.SL



Ceiling Rose Surface
Ceiling Rose Surface
Textured White 80303021.TW
Textured Silver 80303021.TS
Textured Black 80303021.TB

Power Cable 0,75
Power Cable 1.5m
ON/OFF 80303001
DALI Push 80303004



Power Cable 3m
 Power Cable 5m

80303002	80303005
80303003	80303006



Sliding suspension kit
 Slid. susp. kit 1.5m (1u)
 Slid. susp. kit 3m (1u)
 Slid. susp. kit 5m (1u)

Silver
 80304012.SL
 80304013.SL
 80304014.SL



Ceiling Rose Recessed
 Ceiling Rose Recessed

Textured White	Textured Silver	Textured Black
80303020.TW	80303020.TS	80303020.TB