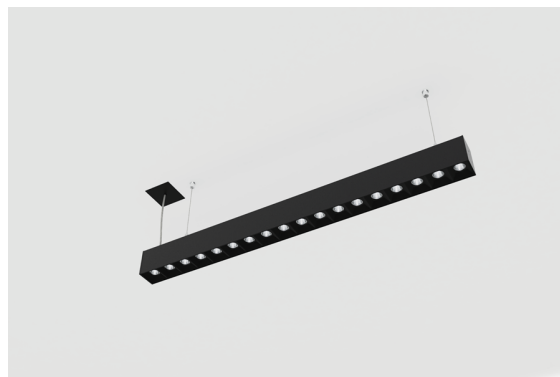


**DESCRIPTION**


ORIS Plus Efficiency is an elegant design linear LED light with a level of lighting for common spaces such as offices and / or dwellings. Oris Plus is an upgrade of our ORIS 50mm. It is a linear LED light with 53,4mm width and 73mm height. These new dimensions allow to accommodate the batteries of the emergency lighting function inside the product. Or, alternatively, it provides space for the electrical cables needed to mount continuous light lines in large spaces. Various sizes up to 5050mm seamless are available. The ORIS Plus Linear LED Light has an option in which the screws are completely hidden. The finishes can be in a high quality textured "sablé" white or black or in natural anodized aluminium. The built-in light technology is high quality, Tridonic with 5 year warranty.

<b>MOUNTING</b>	Suspension
<b>LIGHT DISTRIBUTION</b>	Directa
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 79 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

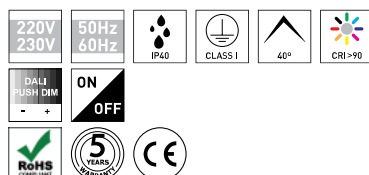**ICONOGRAPHY**

**ORIS+ EFFICIENCY L. GLARE**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	39.4	TB	3000K	DA, NF	2850	2537	215XX.08U4.930.FI
850	39.4	TB	4000K	DA, NF	3075	2737	215XX.08U4.940.FI
1130	52.5	TB	3000K	DA, NF	3800	3382	215XX.11U4.930.FI
1130	52.5	TB	4000K	DA, NF	4100	3649	215XX.11U4.940.FI
1410	65.7	TB	3000K	DA, NF	4750	4180	215XX.14U4.930.FI
1410	65.7	TB	4000K	DA, NF	5125	4510	215XX.14U4.940.FI
1690	78.8	TB	3000K	DA, NF	5700	5016	215XX.16U4.930.FI
1690	78.8	TB	4000K	DA, NF	6150	5412	215XX.16U4.940.FI
1970	91.9	TB	3000K	DA, NF	6650	5852	215XX.19U4.930.FI
1970	91.9	TB	4000K	DA, NF	7175	6314	215XX.19U4.940.FI
2250	105	TB	3000K	DA, NF	7600	6688	215XX.22U4.930.FI
2250	105	TB	4000K	DA, NF	8200	7216	215XX.22U4.940.FI
2530	118.2	TB	3000K	DA, NF	8550	7524	215XX.25U4.930.FI
2530	118.2	TB	4000K	DA, NF	9225	8118	215XX.25U4.940.FI
2810	131.3	TB	3000K	DA, NF	9500	8360	215XX.28U4.930.FI
2810	131.3	TB	4000K	DA, NF	10250	9020	215XX.28U4.940.FI
3090	144.4	TB	3000K	DA, NF	10450	9196	215XX.30U4.930.FI
3090	144.4	TB	4000K	DA, NF	11275	9922	215XX.30U4.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40		

**ACCESSORIES**

	<b>Suspension Kit</b>	<b>Silver</b>
	Suspension kit 1,5m (1un)	80303017.SL
	Suspension kit 3 m (1un)	80303018.SL
	Suspension kit 5 m (1un)	80303019.SL

	<b>Ceiling Rose Surface</b>	<b>Textured White</b>	<b>Textured Silver</b>	<b>Textured Black</b>
	Ceiling Rose Surface	80303021.TW	80303021.TS	80303021.TB



Power Cable 0,75  
Power Cable 1.5m  
Power Cable 3m  
Power Cable 5m

ON/OFF	DALI Push
80303001	80303004
80303002	80303005
80303003	80303006



Ceiling Rose Recessed  
Ceiling Rose Recessed

Textured White	Textured Silver	Textured Black
80303020.TW	80303020.TS	80303020.TB



CASAMBI - DALI Interface  
CASAMBI - DALI Interface

CASAMBI  
8030-2590