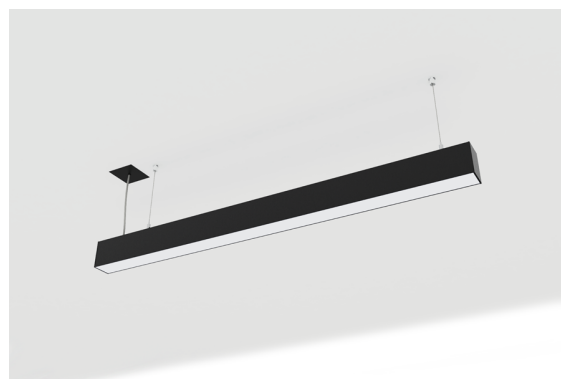


DESCRIPTION


ORIS Plus Efficiency is an elegant design linear LED light with a level of lighting for common spaces such as offices and / or dwellings. Oris Plus is an upgrade of our ORIS 50mm. It is a linear LED light with 53,4mm width and 73mm height. These new dimensions allow to accommodate the batteries of the emergency lighting function inside the product. Or, alternatively, it provides space for the electrical cables needed to mount continuous light lines in large spaces. Various sizes up to 5050mm seamless are available. The ORIS Plus Linear LED Light has an option in which the screws are completely hidden. The finishes can be in a high quality textured "sablé" white or black or in natural anodized aluminium. The built-in light technology is high quality, Tridonic with 5 year warranty.

MOUNTING	Suspension
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Anodized aluminium, Textured White
CONTROL	1-10V, DALI / PUSH Dim, ON/OFF, Tunable White


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 179 lm/W
CRI	CRI→90, CRI→80, Tunable White CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

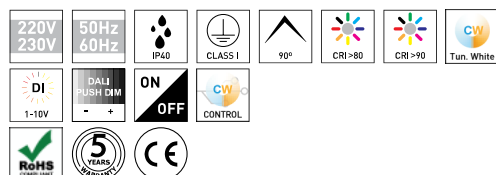ICONOGRAPHY

ORIS+ EFFICIENCY OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	24	AL, TB, TW	3000K	1V, DA, NF	3840	2781	152XX.0809.830.FI
850	24	AL, TB, TW	4000K	1V, DA, NF	4040	2926	152XX.0809.840.FI
1130	32	AL, TB, TW	3000K	1V, DA, NF	5120	3787	152XX.1109.830.FI
1130	32	AL, TB, TW	4000K	1V, DA, NF	5400	3994	152XX.1109.840.FI
1410	40	AL, TB, TW	3000K	1V, DA, NF	6400	4726	152XX.1409.830.FI
1410	40	AL, TB, TW	4000K	1V, DA, NF	6740	4977	152XX.1409.840.FI
1690	48	AL, TB, TW	3000K	1V, DA, NF	7680	5631	152XX.1609.830.FI
1690	48	AL, TB, TW	4000K	1V, DA, NF	8100	5939	152XX.1609.840.FI
1970	56	AL, TB, TW	3000K	1V, DA, NF	8960	6568	152XX.1909.830.FI
1970	56	AL, TB, TW	4000K	1V, DA, NF	9440	6920	152XX.1909.840.FI
2250	64	AL, TB, TW	3000K	1V, DA, NF	10240	7574	152XX.2209.830.FI
2250	64	AL, TB, TW	4000K	1V, DA, NF	10800	7988	152XX.2209.840.FI
2530	72	AL, TB, TW	3000K	1V, DA, NF	11520	8513	152XX.2509.830.FI
2530	72	AL, TB, TW	4000K	1V, DA, NF	12140	8971	152XX.2509.840.FI
2810	80	AL, TB, TW	3000K	1V, DA, NF	12800	9452	152XX.2809.830.FI
2810	80	AL, TB, TW	4000K	1V, DA, NF	13480	9954	152XX.2809.840.FI
3090	88	AL, TB, TW	3000K	1V, DA, NF	14080	10357	152XX.3009.830.FI
3090	88	AL, TB, TW	4000K	1V, DA, NF	14840	10916	152XX.3009.840.FI
3370	96	AL, TB, TW	3000K	1V, DA, NF	15360	11262	152XX.3309.830.FI
3370	96	AL, TB, TW	4000K	1V, DA, NF	16200	11878	152XX.3309.840.FI
3930	112	AL, TB, TW	3000K	1V, DA, NF	17920	13239	152XX.3909.830.FI
3930	112	AL, TB, TW	4000K	1V, DA, NF	18880	13948	152XX.3909.840.FI
4490	128	AL, TB, TW	3000K	1V, DA, NF	20480	15083	152XX.4409.830.FI
4490	128	AL, TB, TW	4000K	1V, DA, NF	21580	15893	152XX.4409.840.FI
5050	144	AL, TB, TW	3000K	1V, DA, NF	23040	16893	152XX.5009.830.FI
5050	144	AL, TB, TW	4000K	1V, DA, NF	24300	17817	152XX.5009.840.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
1-10V	1V	3000K	30	Anodized aluminium	AL
DALI / PUSH Dim	DA	4000K	40	Textured Black	TB
ON/OFF	NF			Textured White	TW


ORIS+ EFFICIENCY OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	23,4	AL, TB, TW	3000K	1V, DA, NF	3610	2615	189XX.0809.930.FI
850	23,4	AL, TB, TW	4000K	1V, DA, NF	3790	2745	189XX.0809.940.FI
1130	31,2	AL, TB, TW	3000K	1V, DA, NF	4820	3565	189XX.1109.930.FI
1130	31,2	AL, TB, TW	4000K	1V, DA, NF	5040	3728	189XX.1109.940.FI
1410	39	AL, TB, TW	3000K	1V, DA, NF	6020	4446	189XX.1409.930.FI
1410	39	AL, TB, TW	4000K	1V, DA, NF	6310	4660	189XX.1409.940.FI
1690	46,8	AL, TB, TW	3000K	1V, DA, NF	7230	5301	189XX.1609.930.FI
1690	46,8	AL, TB, TW	4000K	1V, DA, NF	7560	5543	189XX.1609.940.FI
1970	54,6	AL, TB, TW	3000K	1V, DA, NF	8430	6180	189XX.1909.930.FI
1970	54,6	AL, TB, TW	4000K	1V, DA, NF	8830	6473	189XX.1909.940.FI
2250	62,4	AL, TB, TW	3000K	1V, DA, NF	9640	7130	189XX.2209.930.FI
2250	62,4	AL, TB, TW	4000K	1V, DA, NF	10080	7456	189XX.2209.940.FI
2530	70,2	AL, TB, TW	3000K	1V, DA, NF	10840	8011	189XX.2509.930.FI
2530	70,2	AL, TB, TW	4000K	1V, DA, NF	11350	8388	189XX.2509.940.FI
2810	78	AL, TB, TW	3000K	1V, DA, NF	12040	8892	189XX.2809.930.FI
2810	78	AL, TB, TW	4000K	1V, DA, NF	12620	9320	189XX.2809.940.FI
3090	85,8	AL, TB, TW	3000K	1V, DA, NF	13250	9747	189XX.3009.930.FI
3090	85,8	AL, TB, TW	4000K	1V, DA, NF	13870	10203	189XX.3009.940.FI
3370	93,6	AL, TB, TW	3000K	1V, DA, NF	14460	10602	189XX.3309.930.FI
3370	93,6	AL, TB, TW	4000K	1V, DA, NF	15120	11086	189XX.3309.940.FI
3930	109,2	AL, TB, TW	3000K	1V, DA, NF	16860	12457	189XX.3909.930.FI
3930	109,2	AL, TB, TW	4000K	1V, DA, NF	17660	13048	189XX.3909.940.FI
4490	124,8	AL, TB, TW	3000K	1V, DA, NF	19270	14193	189XX.4409.930.FI
4490	124,8	AL, TB, TW	4000K	1V, DA, NF	20180	14863	189XX.4409.940.FI
5050	140,4	AL, TB, TW	3000K	1V, DA, NF	21690	15903	189XX.5009.930.FI
5050	140,4	AL, TB, TW	4000K	1V, DA, NF	22680	16629	189XX.5009.940.FI

 SELECT YOUR PREFERRED
 OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
1-10V	1V	3000K	30	Anodized aluminium	AL
DALI / PUSH Dim	DA	4000K	40	Textured Black	TB
ON/OFF	NF			Textured White	TW


ORIS+ EFFICIENCY OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	19,8	AL, TB, TW	2700K - 6500K	TW	3525	2553	152XX.0809.82765.FI
1130	26,4	AL, TB, TW	2700K - 6500K	TW	4700	3476	152XX.1109.82765.FI
1410	33	AL, TB, TW	2700K - 6500K	TW	5875	4339	152XX.1409.82765.FI
1690	39,6	AL, TB, TW	2700K - 6500K	TW	7050	5169	152XX.1609.82765.FI
1970	46,2	AL, TB, TW	2700K - 6500K	TW	8225	6029	152XX.1909.82765.FI
2250	52,8	AL, TB, TW	2700K - 6500K	TW	9400	6952	152XX.2209.82765.FI
2530	59,4	AL, TB, TW	2700K - 6500K	TW	10575	7815	152XX.2509.82765.FI
2810	66	AL, TB, TW	2700K - 6500K	TW	11750	8678	152XX.2809.82765.FI
3090	72,6	AL, TB, TW	2700K - 6500K	TW	12925	9508	152XX.3009.82765.FI
3370	79,2	AL, TB, TW	2700K - 6500K	TW	14100	10338	152XX.3309.82765.FI
3930	92,4	AL, TB, TW	2700K - 6500K	TW	16450	12154	152XX.3909.82765.FI
4490	105,6	AL, TB, TW	2700K - 6500K	TW	18800	13847	152XX.4409.82765.FI
5050	118,8	AL, TB, TW	2700K - 6500K	TW	21150	15507	152XX.5009.82765.FI

 SELECT YOUR PREFERRED
 OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TW	2700K - 6500K	82765	Anodized aluminium	AL
				Textured Black	TB
				Textured White	TW

ACCESSORIES

Suspension Kit
 Suspension kit 1,5m (1un)
 Suspension kit 3 m (1un)
 Suspension kit 5 m (1un)

Silver
 80303017.SL
 80303018.SL
 80303019.SL

Ceiling Rose Surface
 Ceiling Rose Surface

Textured White **Textured Silver** **Textured Black**
 80303021.TW 80303021.TS 80303021.TB

Power Cable 0,75
Power Cable 1.5m
Power Cable 3m
Power Cable 5m
ON/OFF **DALI Push**
 80303001 80303004
 80303002 80303005
 80303003 80303006



Ceiling Rose Recessed
Ceiling Rose Recessed

Textured White Textured Silver Textured Black
80303020.TW 80303020.TS 80303020.TB



CASAMBI - DALI Interface
CASAMBI - DALI Interface

CASAMBI
8030-2590