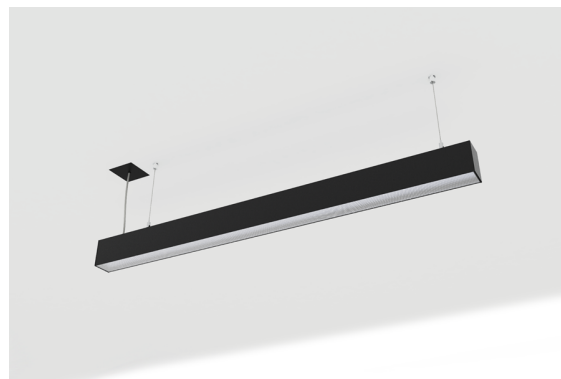


**DESCRIPTION**


ORIS Plus Efficiency is an elegant design linear LED light with a level of lighting for common spaces such as offices and / or dwellings. Oris Plus is an upgrade of our ORIS 50mm. It is a linear LED light with 53,4mm width and 73mm height. These new dimensions allow to accommodate the batteries of the emergency lighting function inside the product. Or, alternatively, it provides space for the electrical cables needed to mount continuous light lines in large spaces. Various sizes up to 5050mm seamless are available. The ORIS Plus Linear LED Light has an option in which the screws are completely hidden. The finishes can be in a high quality textured "sablé" white or black or in natural anodized aluminium. The built-in light technology is high quality, Tridonic with 5 year warranty.

<b>MOUNTING</b>	Suspension
<b>DISTRIBUICAOLUZ</b>	Directa
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Anodized aluminium, Textured White
<b>CONTROL</b>	DALI / Switch Dim, 1-10V, ON/OFF, Tunable White


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 179 lm/W
<b>CRI</b>	CRI→90, CRI→80, Tunable White CRI→80
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

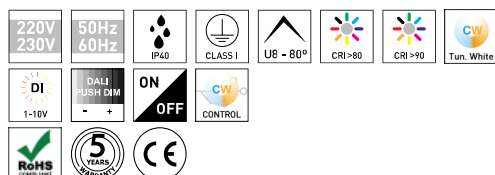**ICONOGRAPHY**

**ORIS+ EFFICIENCY PRISM.  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	20.3	AL, TB, TW	3000K	1V, DA, NF	3330	2659	152XX.08P8.830.FI
850	20.3	AL, TB, TW	4000K	1V, DA, NF	3510	2802	152XX.08P8.840.FI
1130	27	AL, TB, TW	3000K	1V, DA, NF	4440	3572	152XX.11P8.830.FI
1130	27	AL, TB, TW	4000K	1V, DA, NF	4680	3765	152XX.11P8.840.FI
1410	33.8	AL, TB, TW	3000K	1V, DA, NF	5550	4511	152XX.14P8.830.FI
1410	33.8	AL, TB, TW	4000K	1V, DA, NF	5850	4755	152XX.14P8.840.FI
1690	40.5	AL, TB, TW	3000K	1V, DA, NF	6660	5378	152XX.16P8.830.FI
1690	40.5	AL, TB, TW	4000K	1V, DA, NF	7020	5669	152XX.16P8.840.FI
1970	47.3	AL, TB, TW	3000K	1V, DA, NF	7770	6231	152XX.19P8.830.FI
1970	47.3	AL, TB, TW	4000K	1V, DA, NF	8190	6567	152XX.19P8.840.FI
2250	54	AL, TB, TW	3000K	1V, DA, NF	8880	7144	152XX.22P8.830.FI
2250	54	AL, TB, TW	4000K	1V, DA, NF	9360	7530	152XX.22P8.840.FI
2530	60.8	AL, TB, TW	3000K	1V, DA, NF	9990	8083	152XX.25P8.830.FI
2530	60.8	AL, TB, TW	4000K	1V, DA, NF	10530	8520	152XX.25P8.840.FI
2810	67.6	AL, TB, TW	3000K	1V, DA, NF	11100	9022	152XX.28P8.830.FI
2810	67.6	AL, TB, TW	4000K	1V, DA, NF	11700	9510	152XX.28P8.840.FI
3090	74.3	AL, TB, TW	3000K	1V, DA, NF	12210	9889	152XX.30P8.830.FI
3090	74.3	AL, TB, TW	4000K	1V, DA, NF	12870	10424	152XX.30P8.840.FI
3370	81	AL, TB, TW	3000K	1V, DA, NF	13320	10756	152XX.33P8.830.FI
3370	81	AL, TB, TW	4000K	1V, DA, NF	14040	11338	152XX.33P8.840.FI
3930	94.6	AL, TB, TW	3000K	1V, DA, NF	15540	12594	152XX.39P8.830.FI
3930	94.6	AL, TB, TW	4000K	1V, DA, NF	16380	13275	152XX.39P8.840.FI
4490	108.1	AL, TB, TW	3000K	1V, DA, NF	17760	14400	152XX.44P8.830.FI
4490	108.1	AL, TB, TW	4000K	1V, DA, NF	18720	15179	152XX.44P8.840.FI
5050	121.5	AL, TB, TW	3000K	1V, DA, NF	19980	16134	152XX.50P8.830.FI
5050	121.5	AL, TB, TW	4000K	1V, DA, NF	21060	17007	152XX.50P8.840.FI

**SELECT YOUR PREFERRED  
OPTION**

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
1-10V	1V	3000K	30	Anodized aluminium	AL
DALI / Switch Dim	DA	4000K	40	Textured Black	TB
ON/OFF	NF			Textured White	TW


**ORIS+ EFFICIENCY PRISM.  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	19.8	AL, TB, TW	3000K	1V, DA, NF	3120	2491	189XX.08P8.930.FI
850	19.8	AL, TB, TW	4000K	1V, DA, NF	3260	2603	189XX.08P8.940.FI
1130	26.4	AL, TB, TW	3000K	1V, DA, NF	4160	3346	189XX.11P8.930.FI
1130	26.4	AL, TB, TW	4000K	1V, DA, NF	4340	3491	189XX.11P8.940.FI
1410	33	AL, TB, TW	3000K	1V, DA, NF	5200	4227	189XX.14P8.930.FI
1410	33	AL, TB, TW	4000K	1V, DA, NF	5430	4413	189XX.14P8.940.FI
1690	39.6	AL, TB, TW	3000K	1V, DA, NF	6240	5039	189XX.16P8.930.FI
1690	39.6	AL, TB, TW	4000K	1V, DA, NF	6510	5257	189XX.16P8.940.FI
1970	46.2	AL, TB, TW	3000K	1V, DA, NF	7280	5837	189XX.19P8.930.FI
1970	46.2	AL, TB, TW	4000K	1V, DA, NF	7600	6094	189XX.19P8.940.FI
2250	52.8	AL, TB, TW	3000K	1V, DA, NF	8320	6692	189XX.22P8.930.FI
2250	52.8	AL, TB, TW	4000K	1V, DA, NF	8680	6982	189XX.22P8.940.FI
2530	59.4	AL, TB, TW	3000K	1V, DA, NF	9360	7573	189XX.25P8.930.FI
2530	59.4	AL, TB, TW	4000K	1V, DA, NF	9770	7904	189XX.25P8.940.FI
2810	66	AL, TB, TW	3000K	1V, DA, NF	10400	8454	189XX.28P8.930.FI
2810	66	AL, TB, TW	4000K	1V, DA, NF	10860	8826	189XX.28P8.940.FI
3090	72.6	AL, TB, TW	3000K	1V, DA, NF	11440	9266	189XX.30P8.930.FI
3090	72.6	AL, TB, TW	4000K	1V, DA, NF	11940	9670	189XX.30P8.940.FI
3370	79.2	AL, TB, TW	3000K	1V, DA, NF	12480	10078	189XX.33P8.930.FI
3370	79.2	AL, TB, TW	4000K	1V, DA, NF	13020	10514	189XX.33P8.940.FI
3930	92.4	AL, TB, TW	3000K	1V, DA, NF	14560	11800	189XX.39P8.930.FI
3930	92.4	AL, TB, TW	4000K	1V, DA, NF	15200	12317	189XX.39P8.940.FI
4490	105.6	AL, TB, TW	3000K	1V, DA, NF	16640	13493	189XX.44P8.930.FI
4490	105.6	AL, TB, TW	4000K	1V, DA, NF	17370	14083	189XX.44P8.940.FI
5050	118.8	AL, TB, TW	3000K	1V, DA, NF	18720	15117	189XX.50P8.930.FI
5050	118.8	AL, TB, TW	4000K	1V, DA, NF	19530	15771	189XX.50P8.940.FI

SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
1-10V	1V	3000K	30	Anodized aluminium	AL
DALI / Switch Dim ON/OFF	DA NF	4000K	40	Textured Black	TB
				Textured White	TW


**ORIS+ EFFICIENCY PRISM.  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→80**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	19.8	AL, TB, TW	2700K - 6500K	TW	3525	2814	152XX.08P8.82765.FI
1130	26.4	AL, TB, TW	2700K - 6500K	TW	4700	3781	152XX.11P8.82765.FI
1410	33	AL, TB, TW	2700K - 6500K	TW	5875	4775	152XX.14P8.82765.FI
1690	39.6	AL, TB, TW	2700K - 6500K	TW	7050	5693	152XX.16P8.82765.FI
1970	46.2	AL, TB, TW	2700K - 6500K	TW	8225	6595	152XX.19P8.82765.FI
2250	52.8	AL, TB, TW	2700K - 6500K	TW	9400	7562	152XX.22P8.82765.FI
2530	59.4	AL, TB, TW	2700K - 6500K	TW	10575	8556	152XX.25P8.82765.FI
2810	66	AL, TB, TW	2700K - 6500K	TW	11750	9550	152XX.28P8.82765.FI
3090	72.6	AL, TB, TW	2700K - 6500K	TW	12925	10468	152XX.30P8.82765.FI
3370	79.2	AL, TB, TW	2700K - 6500K	TW	14100	11386	152XX.33P8.82765.FI
3930	92.4	AL, TB, TW	2700K - 6500K	TW	16450	13331	152XX.39P8.82765.FI
4490	105.6	AL, TB, TW	2700K - 6500K	TW	18800	15243	152XX.44P8.82765.FI
5050	118.8	AL, TB, TW	2700K - 6500K	TW	21150	17079	152XX.50P8.82765.FI

SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TW	2700K - 6500K	82765	Anodized aluminium	AL
				Textured Black	TB
				Textured White	TW

**ACCESSORIES**


Suspension Kit  
Suspension kit 1,5m (1un)  
Suspension kit 3 m (1un)  
Suspension kit 5 m (1un)

Silver  
80303017.SL  
80303018.SL  
80303019.SL



Ceiling Rose Surface  
Ceiling Rose Surface

Textured White Textured Silver Textured Black  
80303021.TW 80303021.TS 80303021.TB



Power Cable 0,75  
Power Cable 1.5m  
Power Cable 3m  
Power Cable 5m

ON/OFF DALI Push  
80303001 80303004  
80303002 80303005  
80303003 80303006



Ceiling Rose Recessed  
Ceiling Rose Recessed

Textured White    Textured Silver    Textured Black  
80303020.TW    80303020.TS    80303020.TB



CASAMBI - DALI Interface  
CASAMBI - DALI Interface

CASAMBI  
8030-2590