

**DESCRIPTION**

ORIS Plus High Performance is a solution that can be used to illuminate large spaces, in continuous lines up to 15 m, such as supermarkets, large retail stores and even industrial environments. It is possible to incorporate lenses to control the beam angle of the lighting fixture, which allows changing the light distribution according to the needs of the place. In this version, high efficiency is also highlighted, with LEDs up to 205lm/W in a single linear profile of 3370mm. Smart Lighting options with motion and brightness sensors are also available. Oris Plus is an upgrade of our ORIS 50mm. It is a linear LED light with 53,4mm width and 73mm height. These new dimensions allow to accommodate the batteries of the emergency lighting function inside the product. Or, alternatively, it provides space for the electrical cables needed to mount continuous light lines in large spaces. Various sizes up to 3370mm seamless are available. The ORIS Plus Linear LED Light has an option in which the screws are completely hidden. The finishes can be in a high quality textured "sablé" white or black or in natural anodized aluminium. The built-in light technology is high quality, Tridonic with 5 year warranty.

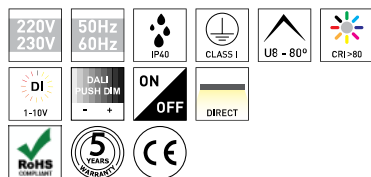


<b>MOUNTING TYPE</b>	Suspension
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Anodized aluminium, Textured Black, Textured White
<b>CONTROL</b>	1-10V, DALI / Switch Dim, ON/OFF

**TECHNICAL DRAWING**

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 206 lm/W
<b>CRI</b>	CRI→80
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**ICONOGRAPHY**

**ORIS+ HP PRISMATIC  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	33	AL, TB, TW	4000K	1V, DA, NF	6679	5372	157XX.11P8.840.FI
1130	33	AL, TB, TW	5000K	1V, DA, NF	6765	5442	157XX.11P8.850.FI
1690	49.5	AL, TB, TW	4000K	1V, DA, NF	10019	8091	157XX.16P8.840.FI
1690	49.5	AL, TB, TW	5000K	1V, DA, NF	10148	8195	157XX.16P8.850.FI
2250	66	AL, TB, TW	4000K	1V, DA, NF	13358	10744	157XX.22P8.840.FI
2250	66	AL, TB, TW	5000K	1V, DA, NF	13530	10884	157XX.22P8.850.FI
2810	82.5	AL, TB, TW	4000K	1V, DA, NF	16698	13463	157XX.28P8.840.FI
2810	82.5	AL, TB, TW	5000K	1V, DA, NF	16913	13637	157XX.28P8.850.FI
3370	99	AL, TB, TW	4000K	1V, DA, NF	20038	16182	157XX.33P8.840.FI
3370	99	AL, TB, TW	5000K	1V, DA, NF	20296	16390	157XX.33P8.850.FI

**SELECT YOUR PREFERRED  
OPTION**

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
1-10V	1V	4000K	40	Anodized aluminium	AL
DALI / Switch Dim	DA	5000K	50	Textured Black	TB
ON/OFF	NF			Textured White	TW

**ACCESSORIES**

	<b>Suspension Kit</b>	Silver
	Suspension kit 1,5m (1un)	80303017.SL
	Suspension kit 3 m (1un)	80303018.SL
	Suspension kit 5 m (1un)	80303019.SL

	<b>Ceiling Rose Surface</b>	Textured White	Textured Silver	Textured Black
	Ceiling Rose Surface	80303021.TW	80303021.TS	80303021.TB



Power Cable 0,75  
Power Cable 1.5m  
Power Cable 3m  
Power Cable 5m

ON/Off	DALI Push
80303001	80303004
80303002	80303005
80303003	80303006



Ceiling Rose Recessed  
Ceiling Rose Recessed

Textured White	Textured Silver	Textured Black
80303020.TW	80303020.TS	80303020.TB



CASAMBI - DALI Interface  
CASAMBI - DALI Interface

CASAMBI  
8030-2590