

## DESCRIPTION


ORIS Plus High Performance is a solution that can be used to illuminate large spaces, in continuous lines up to 15 m, such as supermarkets, large retail stores and even industrial environments. It is possible to incorporate lenses to control the beam angle of the lighting fixture, which allows changing the light distribution according to the needs of the place. In this version, high efficiency is also highlighted, with LEDs up to 205lm/W in a single linear profile of 3370mm. Smart Lighting options with motion and brightness sensors are also available. Oris Plus is an upgrade of our ORIS 50mm. It is a linear LED light with 53,4mm width and 73mm height. These new dimensions allow to accommodate the batteries of the emergency lighting function inside the product. Or, alternatively, it provides space for the electrical cables needed to mount continuous light lines in large spaces. Various sizes up to 3370mm seamless are available. The ORIS Plus Linear LED Light has an option in which the screws are completely hidden. The finishes can be in a high quality textured "sablé" white or black or in natural anodized aluminium. The built-in light technology is high quality, Tridonic with 5 year warranty.

|                           |  |
|---------------------------|--|
| <b>MOUNTING TYPE</b>      | Suspension   |
| <b>LIGHT DISTRIBUTION</b> | Direct   |
| <b>POWER SUPPLY</b>       | 220-230V / 50-60 Hz                                |
| <b>WARRANTY</b>           | 5 Years  |
| <b>FINISHING</b>          | Anodized aluminium, Textured Black, Textured White |
| <b>CONTROL</b>            | 1-10V, DALI / Switch Dim, ON/OFF                   |

## LED FEATURES

|                             |                 |
|-----------------------------|-----------------|
| <b>LUMINOUS EFFICIENCY</b>  | UP TO 206 lm/W  |
| <b>CRI</b>                  | CRI>80          |
| <b>LIFESPAN</b>             | 50.000 Hours    |
| <b>STEPS MACADAM</b>        | 3 Steps MacAdam |
| <b>LUMEN MAINTENANCE</b>    | L90/B50         |
| <b>PHOTOBIOLOGICAL RISK</b> | RG1             |

## ICONOGRAPHY

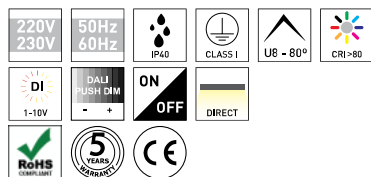

## ORIS+ HP PRISMATIC PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI>80

| LENGTH | POWER | FINISHING  | COLOR TEMP. | CONTROL TYPE | LED LUMENS | LUMINAIRE LM | CODE              |
|--------|-------|------------|-------------|--------------|------------|--------------|-------------------|
| 1130   | 33    | AL, TB, TW | 4000K       | 1V, DA, NF   | 6679       | 5372         | 157XX.11P8.840.FI |
| 1130   | 33    | AL, TB, TW | 5000K       | 1V, DA, NF   | 6765       | 5442         | 157XX.11P8.850.FI |
| 1690   | 49.5  | AL, TB, TW | 4000K       | 1V, DA, NF   | 10019      | 8091         | 157XX.16P8.840.FI |
| 1690   | 49.5  | AL, TB, TW | 5000K       | 1V, DA, NF   | 10148      | 8195         | 157XX.16P8.850.FI |
| 2250   | 66    | AL, TB, TW | 4000K       | 1V, DA, NF   | 13358      | 10744        | 157XX.22P8.840.FI |
| 2250   | 66    | AL, TB, TW | 5000K       | 1V, DA, NF   | 13530      | 10884        | 157XX.22P8.850.FI |
| 2810   | 82.5  | AL, TB, TW | 4000K       | 1V, DA, NF   | 16698      | 13463        | 157XX.28P8.840.FI |
| 2810   | 82.5  | AL, TB, TW | 5000K       | 1V, DA, NF   | 16913      | 13637        | 157XX.28P8.850.FI |
| 3370   | 99    | AL, TB, TW | 4000K       | 1V, DA, NF   | 20038      | 16182        | 157XX.33P8.840.FI |
| 3370   | 99    | AL, TB, TW | 5000K       | 1V, DA, NF   | 20296      | 16390        | 157XX.33P8.850.FI |

## SELECT YOUR PREFERRED OPTION

| CONTROL TYPE      | XX | COLOR TEMP. | CT | FINISHING          | FI |
|-------------------|----|-------------|----|--------------------|----|
| 1-10V             | 1V | 4000K       | 40 | Anodized aluminium | AL |
| DALI / Switch Dim | DA | 5000K       | 50 | Textured Black     | TB |
| ON/OFF            | NF |             |    | Textured White     | TW |

## ACCESSORIES



| Suspension Kit            | Silver      |
|---------------------------|-------------|
| Suspension kit 1,5m (1un) | 80303017.SL |
| Suspension kit 3 m (1un)  | 80303018.SL |
| Suspension kit 5 m (1un)  | 80303019.SL |



| Ceiling Rose Surface | Textured White | Textured Silver | Textured Black |
|----------------------|----------------|-----------------|----------------|
| Ceiling Rose Surface | 80303021.TW    | 80303021.TS     | 80303021.TB    |



## TECHNICAL DRAWING





| Power Cable 0,75     | ON/Off   | Dim Control |
|----------------------|----------|-------------|
| Clear Power Cable 3m | 80303002 |             |
| Power Cable 1.5m     | 80303001 | 80303004    |
| Power Cable 3m       | 80303005 |             |
| Power Cable 5m       | 80303003 | 80303006    |



| Ceiling Rose Recessed | Textured White | Textured Silver | Textured Black |
|-----------------------|----------------|-----------------|----------------|
| Ceiling Rose Recessed | 80303020.TW    | 80303020.TS     | 80303020.TB    |



| CASAMBI - DALI Interface | CASAMBI   |
|--------------------------|-----------|
| CASAMBI - DALI Interface | 8030-2590 |