

**DESCRIPTION**

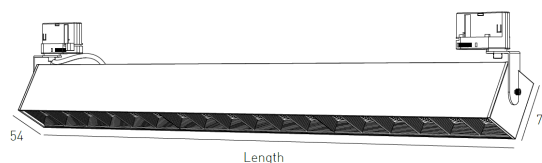
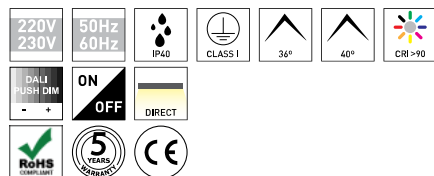
Technical lighting is increasingly considered when designing spaces and the purpose for which they are intended, because each place has its own specificity and lighting needs.

The Wall Washer from the ORIS Plus range, with adapter for 230V universal track, was developed precisely to respond to one of these shortcomings, that of sweeping the wall with uniform and efficient light to highlight the products exhibited there.

<b>MOUNTING</b>	Uni Track
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	DALI / PUSH Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 82 lm/W
<b>CRI</b>	CRI->90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**

**ORIS+ H.P. WALL WASHER**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
290	18,9	TB, TW	DA, NF	U3, U4	1435	1281	3000K	282XX.02U3.930.FI
290	18,9	TB, TW	DA, NF	U3, U4	1435	1281	3000K	282XX.02U4.930.FI
290	18,9	TB, TW	DA, NF	U3, U4	1543	1378	4000K	282XX.02U3.940.FI
290	18,9	TB, TW	DA, NF	U3, U4	1543	1378	4000K	282XX.02U4.940.FI
580	37,8	TB, TW	DA, NF	U3, U4	2870	2562	3000K	282XX.05U3.930.FI
580	37,8	TB, TW	DA, NF	U3, U4	2870	2562	3000K	282XX.05U4.930.FI
580	37,8	TB, TW	DA, NF	U3, U4	3086	2755	4000K	282XX.05U3.940.FI
580	37,8	TB, TW	DA, NF	U3, U4	3086	2755	4000K	282XX.05U4.940.FI
850	56,7	TB, TW	DA, NF	U3, U4	4306	3844	3000K	282XX.08U3.930.FI
850	56,7	TB, TW	DA, NF	U3, U4	4306	3844	3000K	282XX.08U4.930.FI
850	56,7	TB, TW	DA, NF	U3, U4	4630	4133	4000K	282XX.08U3.940.FI
850	56,7	TB, TW	DA, NF	U3, U4	4630	4133	4000K	282XX.08U4.940.FI
1130	75,6	TB, TW	DA, NF	U3, U4	5741	5125	3000K	282XX.11U3.930.FI
1130	75,6	TB, TW	DA, NF	U3, U4	5741	5125	3000K	282XX.11U4.930.FI
1130	75,6	TB, TW	DA, NF	U3, U4	6173	5511	4000K	282XX.11U3.940.FI
1130	75,6	TB, TW	DA, NF	U3, U4	6173	5511	4000K	282XX.11U4.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI / PUSH Dim	DA	Textured Black	TB	30°	U3
ON/OFF	NF	Textured White	TW	45°	U4


**ACCESSORIES**

	Track ON/OFF Susp./Surf.	
	ON/OFF Track 1m Black	UP1459429-1
	ON/OFF Track 1m White	UP1459102-1
	ON/OFF Track 2m Black	UP1459429
	ON/OFF Track 2m White	UP1459102
	Track DALI Susp./Surf.	
	DALI Track 1m Black	UP1459439-1
	DALI Track 1m White	UP1459107-1
	DALI Track 2m Black	UP1459439
	DALI Track 2m White	UP1459107
	Recess. Track ON/OFF	
	ON/OFF Rec. Track 1m Bl	UP1459312-1



ON/OFF Rec. Track 1m WH  
ON/OFF Rec. Track 2m BL  
ON/OFF Rec. Track 2m WH

UP1459112-1  
UP1459312  
UP1459112



Recessed Track DALI  
DALI Rec. Track 1m BL  
DALI Rec. Track 1m WH  
DALI Rec. Track 2m BL  
DALI Rec. Track 2m WH

UP1459317-1  
UP1459117-1  
UP1459317  
UP1459117