

DESCRIPTION

Oris Plus is an upgrade of our ORIS 50mm. It is a linear LED light with 53,4mm width and 73mm height that allows much more options than is the previous version such as recessed lighting spots, mini track lights, emergency kit, motion & brightness sensors, several lenses, etc.

ORIS Plus Modular is an attractive and low UGR design LED profile, with architectural purposes, designed to enrich special places. In this version we can customize the lighting fixtures, incorporating in a single line, different types of lighting source, diffusers or beam angles. The recessed lighting spots allow a particularly low level of glare. Small adjustable track lights with minimalist design can also be combined, especially designed to highlight special products or objects.

Various sizes up to 5900mm seamless are available. The ORIS Plus Linear LED Light has an option in which the screws are completely hidden (only on request). The finishes can be in a high quality textured "sablé" white or black or in natural anodized aluminium.

The available light diffuser options are:

- Opal
- Prismatic
- Recessed lighting spots with low UGR


The built-in light technology is high quality, Tridonic with 5 year warranty.

MOUNTING	Saliente
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
CONTROL	DALI / PUSH Dim, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 78 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

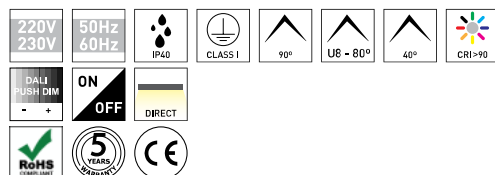


ORIS + MODULAR
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

ACCESSORIES


	Suspension Kit	Silver	
	Suspension kit 1,5m (1un)	80303017.SL	
	Suspension kit 3 m (1un)	80303018.SL	
	Suspension kit 5 m (1un)	80303019.SL	
	Clear Power Cable	ON/OFF	DALI Push
	Power Cable 1.5m	80303001	80303004
	Power Cable 3m	80303002	80303005
	Power Cable 5m	80303003	80303006
	SEM DescAbr - 2031000		
	SEM DescAbr - 2031000.TB	2031000.TB	
	SEM DescAbr - 2031000.TS	2031000.TS	
	SEM DescAbr - 2031000.TW	2031000.TW	
	SEM DescAbr - 204L.DA		
	SEM DescAbr - 204L.DA.TB	204L.DA.TB	
	SEM DescAbr - 204L.DA.TW	204L.DA.TW	






SEM DescAbr - 204L.NF
SEM DescAbr - 204L.NF.TB
SEM DescAbr - 204L.NF.TW

204L.NF.TB
204L.NF.TW



SEM DescAbr - 2080-0099
SEM DescAbr - 2080-0099.A
SEM DescAbr - 2080-0099.T

2080-0099.AL
2080-0099.TB,
2080-0099.TW




SEM DescAbr - 80303026

SEM TITULO -
RAW

SEM DescAbr - 80303026.AL
SEM DescAbr - 80303026.RA
SEM DescAbr - 80303026.TB
SEM DescAbr - 80303026.TW
SEM DescAbr - 80303027

80303026.AL
80303026.RAW
80303026.TB
80303026.TW

SEM TITULO -
RAW




SEM DescAbr - 80303027.AL
SEM DescAbr - 80303027.RA
SEM DescAbr - 80303027.TB
SEM DescAbr - 80303027.TW

80303027.AL
80303027.RAW
80303027.TB
80303027.TW


SEM DescAbr -
SEM DescAbr - 1970290.U4

SEM TITULO -
1970290.U4




SEM DescAbr -
SEM DescAbr - 1970570.U4

SEM TITULO -
1970570.U4




SEM DescAbr -
SEM DescAbr - 1970850.U4

SEM TITULO -
1970850.U4



SEM DescAbr -
SEM DescAbr - 1971130.U4.

SEM TITULO -
1971130.U4.BL



Joint ON/OFF ORIS Plus
Joint ON/OFF ORIS Plus

SEM TITULO -
80303072



Joint DALI ORIS Plus
Joint DALI ORIS Plus

SEM TITULO -
80303074