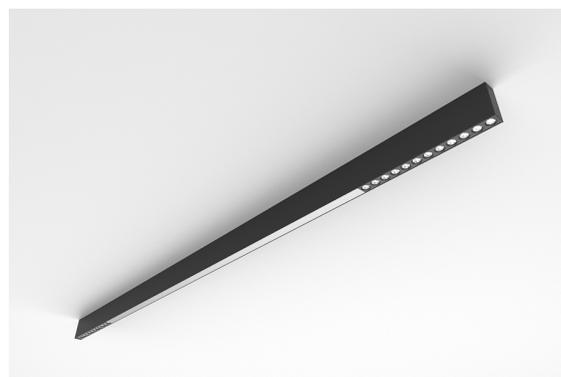



**DESCRIPTION**

With this version of the ORIS SLIM PRO COMBI, it is possible to obtain reduced size light lines while spreading simultaneously direct, thus offering greater freedom for those who design the lighting for a space.

<b>MOUNTING TYPE</b>	Saliente
<b>LIGHT DISTRIBUTION</b>	Directa
<b>POWER SUPPLY</b>	220-240V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Anodized aluminium, Textured Black, Textured Silver, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 153 lm/W
<b>CRI</b>	CRI->90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**

**ORIS S.P.COMBI PR+L3**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1420	22.9	TB, TS, TW	3000K	DA, NF	3460	2203	484XX.14P8.930.FI
1420	22.9	TB, TS, TW	4000K	DA, NF	3460	2203	484XX.14P8.940.FI
1700	28	TB, TS, TW	3000K	DA, NF	4248	2603	484XX.17P8.930.FI
1700	28	TB, TS, TW	4000K	DA, NF	4248	2603	484XX.17P8.940.FI
1980	33.1	TB, TS, TW	3000K	DA, NF	5036	3002	484XX.19P8.930.FI
1980	33.1	TB, TS, TW	4000K	DA, NF	5036	3002	484XX.19P8.940.FI
2260	38.2	TB, TS, TW	3000K	DA, NF	5824	3400	484XX.22P8.930.FI
2260	38.2	TB, TS, TW	4000K	DA, NF	5824	3400	484XX.22P8.940.FI
2540	43.4	TB, TS, TW	3000K	DA, NF	6611	3800	484XX.25P8.930.FI
2540	43.4	TB, TS, TW	4000K	DA, NF	6611	3800	484XX.25P8.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

**ACCESSORIES**


CASAMBI - DALI Interface  
 CASAMBI - DALI Interface

CASAMBI  
 8030-2590