

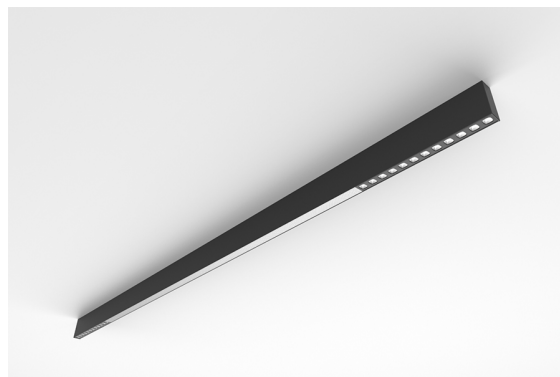
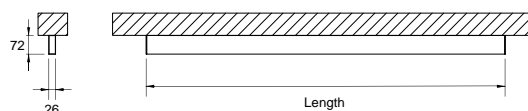
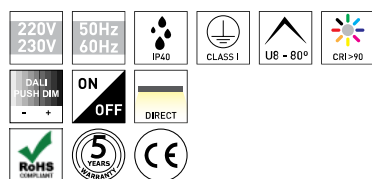
**DESCRIPTION**

With this version of the ORIS SLIM PRO COMBI, it is possible to obtain reduced size light lines while spreading simultaneously direct, thus offering greater freedom for those who design the lighting for a space.

<b>MOUNTING TYPE</b>	Surface
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured Silver, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 200 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1


**TECHNICAL DRAWING**

**ICONOGRAPHY**

**ORIS SL. PRO COM. PR+LG**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1410	23.9	TB, TS, TW	3000K	DA, NF	4635	4049	5483XX.14P8.930.FI
1410	23.9	TB, TS, TW	4000K	DA, NF	4762	4160	5483XX.14P8.940.FI
1690	29.3	TB, TS, TW	3000K	DA, NF	5686	4963	5483XX.16P8.930.FI
1690	29.3	TB, TS, TW	4000K	DA, NF	5840	5098	5483XX.16P8.940.FI
1970	34.7	TB, TS, TW	3000K	DA, NF	6737	5877	5483XX.19P8.930.FI
1970	34.7	TB, TS, TW	4000K	DA, NF	6918	6036	5483XX.19P8.940.FI
2250	40	TB, TS, TW	3000K	DA, NF	7788	6792	5483XX.22P8.930.FI
2250	40	TB, TS, TW	4000K	DA, NF	7996	6973	5483XX.22P8.940.FI
2530	45.4	TB, TS, TW	3000K	DA, NF	8839	7706	5483XX.25P8.930.FI
2530	45.4	TB, TS, TW	4000K	DA, NF	9074	7911	5483XX.25P8.940.FI

SELECT YOUR PREFERRED  
OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

**ACCESSORIES**


CASAMBI - DALI Interface  
 CASAMBI - DALI Interface  
 CASAMBI  
 8030-2590