

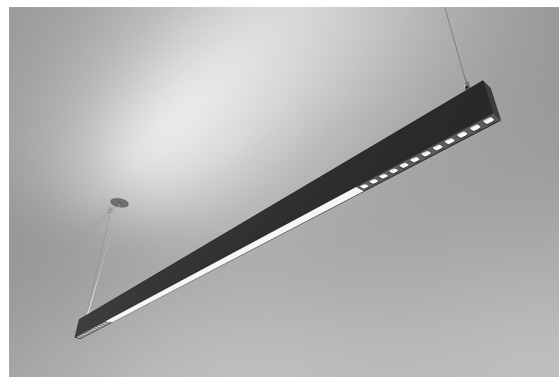
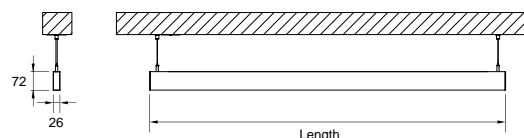
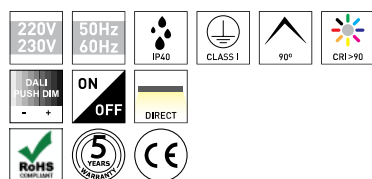
DESCRIPTION

With this version of the ORIS SLIM PRO COMBI, it is possible to obtain reduced size light lines while spreading simultaneously direct and indirect light (D / I), thus offering greater freedom for those who design the lighting for a space.

| | |
|---------------------------|---|
| MOUNTING TYPE | Suspension |
| LIGHT DISTRIBUTION | Direct |
| POWER SUPPLY | 220-230V / 50-60 Hz |
| WARRANTY | 5 Years |
| FINISHING | Textured Black, Textured Silver, Textured White |
| CONTROL | DALI / Switch Dim, ON/OFF |

LED FEATURES

| | |
|-----------------------------|-----------------|
| LUMINOUS EFFICIENCY | UP TO 202 lm/W |
| CRI | CRI→90 |
| LIFESPAN | 50.000 Hours |
| STEPS MACADAM | 3 Steps MacAdam |
| LUMEN MAINTENANCE | L90/B50 |
| PHOTOBIOLOGICAL RISK | RG1 |


TECHNICAL DRAWING

ICONOGRAPHY

ORIS SL. PRO C. D/I OP+LG
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

| LENGTH | POWER | FINISHING | COLOR TEMP. | CONTROL TYPE | LED LUMENS | LUMINAIRE LM | CODE |
|--------|-------|------------|-------------|--------------|------------|--------------|--------------------|
| 1690 | 37.9 | TB, TS, TW | 3000K | DA, NF | 7443 | 5478 | 5485XX.1709.930.FI |
| 1690 | 37.9 | TB, TS, TW | 4000K | DA, NF | 7657 | 5637 | 5485XX.1709.940.FI |
| 1970 | 45 | TB, TS, TW | 3000K | DA, NF | 8845 | 6460 | 5485XX.1909.930.FI |
| 1970 | 45 | TB, TS, TW | 4000K | DA, NF | 9099 | 6646 | 5485XX.1909.940.FI |
| 2250 | 50.4 | TB, TS, TW | 3000K | DA, NF | 9896 | 7196 | 5485XX.2209.930.FI |
| 2250 | 50.4 | TB, TS, TW | 4000K | DA, NF | 10177 | 7400 | 5485XX.2209.940.FI |
| 2530 | 55.7 | TB, TS, TW | 3000K | DA, NF | 10947 | 7931 | 5485XX.2509.930.FI |
| 2530 | 55.7 | TB, TS, TW | 4000K | DA, NF | 11255 | 8155 | 5485XX.2509.940.FI |
| 2810 | 64.5 | TB, TS, TW | 3000K | DA, NF | 12701 | 9159 | 5485XX.2809.930.FI |
| 2810 | 64.5 | TB, TS, TW | 4000K | DA, NF | 13059 | 9418 | 5485XX.2809.940.FI |

SELECT YOUR PREFERRED OPTION

| CONTROL TYPE | XX | COLOR TEMP. | CT | FINISHING | FI |
|-------------------|----|-------------|----|-----------------|----|
| DALI / Switch Dim | DA | 3000K | 30 | Textured Black | TB |
| ON/OFF | NF | 4000K | 40 | Textured Silver | TS |
| | | | | Textured White | TW |

ACCESSORIES

| | | | |
|--|--|--|---|
| | Suspension Kit Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un) | Silver 80303017.SL 80303018.SL 80303019.SL | |
| | Ceiling Rose Recessed Ceiling Rose Recessed | Textured White Textured Silver Textured Black 80303020.TW 80303020.TS 80303020.TB | |
| | Ceiling Rose Surface Ceiling Rose Surface | Textured White Textured Silver Textured Black 80303021.TW 80303021.TS 80303021.TB | |
| | Power Cable 0,75 Power Cable 1.5m Power Cable 3m Power Cable 5m | ON/Off 80303001 80303002 80303003 | DALI Push 80303004 80303005 80303006 |



CASAMBI - DALI Interface
CASAMBI - DALI Interface

CASAMBI
8030-2590