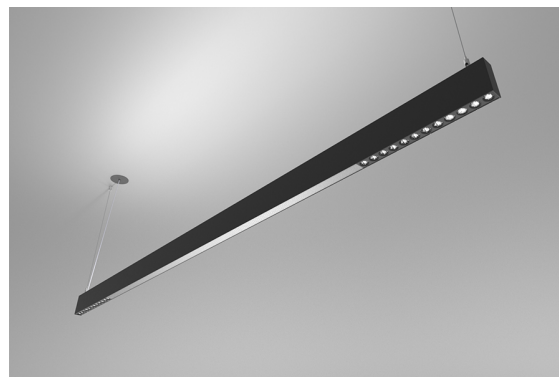



DESCRIPTION

With this version of the ORIS SLIM PRO COMBI, it is possible to obtain reduced size light lines while spreading simultaneously direct and indirect light (D / I), thus offering greater freedom for those who design the lighting for a space.

| | |
|--------------------|---|
| MOUNTING TYPE | Suspension |
| LIGHT DISTRIBUTION | Direct |
| POWER SUPPLY | 230V / |
| WARRANTY | 5 Years |
| FINISHING | Anodized aluminium, Textured Black, Textured Silver, Textured White |
| CONTROL | DALI / Switch Dim, ON/OFF |


LED FEATURES

| | |
|----------------------|-----------------|
| LUMINOUS EFFICIENCY | UP TO 156 lm/W |
| CRI | CRI->90 |
| LIFESPAN | 50.000 Hours |
| STEPS MACADAM | 3 Steps MacAdam |
| LUMEN MAINTENANCE | L90/B50 |
| PHOTOBIOLOGICAL RISK | RG1 |

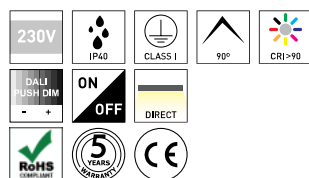ICONOGRAPHY

ORIS SL. PRO C. D/I PR+L3
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

| LENGTH | POWER | FINISHING | COLOR TEMP. | CONTROL TYPE | LED LUMENS | LUMINAIRE LM | CODE |
|--------|-------|------------|-------------|--------------|------------|--------------|-------------------|
| 1700 | 32.9 | TB, TS, TW | 3000K | DA, NF | 5067 | 3156 | 486XX.17P8.930.FI |
| 1700 | 32.9 | TB, TS, TW | 4000K | DA, NF | 5067 | 3156 | 486XX.17P8.940.FI |
| 1980 | 39.6 | TB, TS, TW | 3000K | DA, NF | 6127 | 3740 | 486XX.19P8.930.FI |
| 1980 | 39.6 | TB, TS, TW | 4000K | DA, NF | 6127 | 3740 | 486XX.19P8.940.FI |
| 2260 | 46.3 | TB, TS, TW | 3000K | DA, NF | 7188 | 4322 | 486XX.22P8.930.FI |
| 2260 | 46.3 | TB, TS, TW | 4000K | DA, NF | 7188 | 4322 | 486XX.22P8.940.FI |
| 2540 | 53 | TB, TS, TW | 3000K | DA, NF | 8249 | 4906 | 486XX.25P8.930.FI |
| 2540 | 53 | TB, TS, TW | 4000K | DA, NF | 8249 | 4906 | 486XX.25P8.940.FI |
| 2825 | 59.7 | TB, TS, TW | 3000K | DA, NF | 9310 | 5463 | 486XX.28P8.930.FI |
| 2825 | 59.7 | TB, TS, TW | 4000K | DA, NF | 9310 | 5463 | 486XX.28P8.940.FI |

SELECT YOUR PREFERRED OPTION

| CONTROL TYPE | XX | COLOR TEMP. | CT | FINISHING | FI |
|-------------------|----|-------------|----|-----------------|----|
| DALI / Switch Dim | DA | 3000K | 30 | Textured Black | TB |
| ON/OFF | NF | 4000K | 40 | Textured Silver | TS |
| | | | | Textured White | TW |

ACCESSORIES

| | | | | |
|--|---|---|-----------------------------------|-------------------------------|
| | Suspension Kit Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un) | Silver 80303017.SL 80303018.SL 80303019.SL | | |
| | Ceiling Rose Recessed Ceiling Rose Recessed | Textured White 80303020.TW | Textured Silver 80303020.TS | Textured Black 80303020.TB |
| | Ceiling Rose Surface Ceiling Rose Surface | Textured White 80303021.TW | Textured Silver 80303021.TS | Textured Black 80303021.TB |
| | Power Cable 0,75 Power Cable 1.5m Power Cable 3m | ON/Off 80303001 80303002 | DALI Push 80303004 80303005 | |

Power Cable 5m

80303003

80303006



CASAMBI - DALI Interface
CASAMBI - DALI Interface

CASAMBI
8030-2590