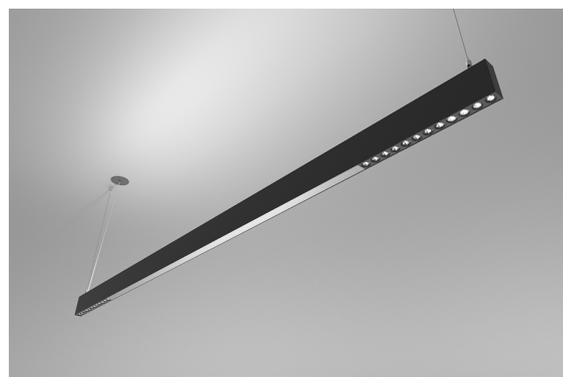


DESCRIPTION

With this version of the ORIS SLIM PRO COMBI, it is possible to obtain reduced size light lines while spreading simultaneously direct and indirect light (D / I), thus offering greater freedom for those who design the lighting for a space.

MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	230V /
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured Silver, Textured White
CONTROL	DALI / Switch Dim, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 156 lm/W
CRI	CRI->90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

ORIS SL. PRO C. D/I PR+L3
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1700	32.9	TB, TS, TW	3000K	DA, NF	5067	3156	486XX.17P8.930.FI
1700	32.9	TB, TS, TW	4000K	DA, NF	5067	3156	486XX.17P8.940.FI
1980	39.6	TB, TS, TW	3000K	DA, NF	6127	3740	486XX.19P8.930.FI
1980	39.6	TB, TS, TW	4000K	DA, NF	6127	3740	486XX.19P8.940.FI
2260	46.3	TB, TS, TW	3000K	DA, NF	7188	4322	486XX.22P8.930.FI
2260	46.3	TB, TS, TW	4000K	DA, NF	7188	4322	486XX.22P8.940.FI
2540	53	TB, TS, TW	3000K	DA, NF	8249	4906	486XX.25P8.930.FI
2540	53	TB, TS, TW	4000K	DA, NF	8249	4906	486XX.25P8.940.FI
2825	59.7	TB, TS, TW	3000K	DA, NF	9310	5463	486XX.28P8.930.FI
2825	59.7	TB, TS, TW	4000K	DA, NF	9310	5463	486XX.28P8.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

ACCESSORIES

	Suspension Kit Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)	Silver 80303017.SL 80303018.SL 80303019.SL		
	Ceiling Rose Recessed Ceiling Rose Recessed	Textured White 80303020.TW	Textured Silver 80303020.TS	Textured Black 80303020.TB
	Ceiling Rose Surface Ceiling Rose Surface	Textured White 80303021.TW	Textured Silver 80303021.TS	Textured Black 80303021.TB
	Power Cable 0,75 Power Cable 1.5m Power Cable 3m	ON/OFF 80303001 80303002	DALI Push 80303004 80303005	

Power Cable 5m

80303003

80303006



CASAMBI - DALI Interface
CASAMBI - DALI Interface

CASAMBI
8030-2590