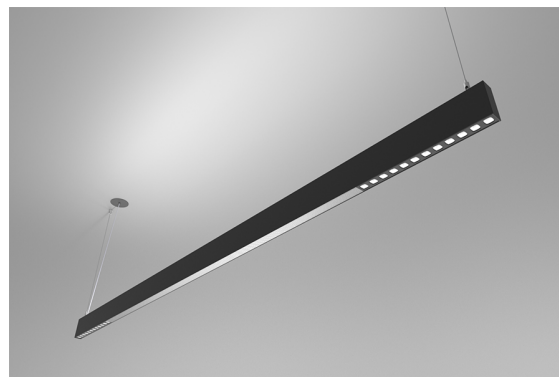


**DESCRIPTION**


With this version of the ORIS SLIM PRO COMBI, it is possible to obtain reduced size light lines while spreading simultaneously direct and indirect light (D / I), thus offering greater freedom for those who design the lighting for a space.

<b>MOUNTING TYPE</b>	Suspension
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured Silver, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 202 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

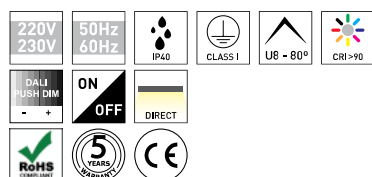**ICONOGRAPHY**

**ORIS SL. PRO C. D/I PR+LG**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1690	37.9	TB, TS, TW	3000K	DA, NF	7443	6193	5485XX.17P8.930.FI
1690	37.9	TB, TS, TW	4000K	DA, NF	7657	6370	5485XX.17P8.940.FI
1970	45	TB, TS, TW	3000K	DA, NF	8845	7353	5485XX.19P8.930.FI
1970	45	TB, TS, TW	4000K	DA, NF	9099	7562	5485XX.19P8.940.FI
2250	50.4	TB, TS, TW	3000K	DA, NF	9896	8268	5485XX.22P8.930.FI
2250	50.4	TB, TS, TW	4000K	DA, NF	10177	8500	5485XX.22P8.940.FI
2530	55.7	TB, TS, TW	3000K	DA, NF	10947	9182	5485XX.25P8.930.FI
2530	55.7	TB, TS, TW	4000K	DA, NF	11255	9438	5485XX.25P8.940.FI
2810	64.5	TB, TS, TW	3000K	DA, NF	12701	10589	5485XX.28P8.930.FI
2810	64.5	TB, TS, TW	4000K	DA, NF	13059	10884	5485XX.28P8.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

**ACCESSORIES**

	<b>Suspension Kit</b> Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)	Silver 80303017.SL 80303018.SL 80303019.SL
	<b>Ceiling Rose Recessed</b> Ceiling Rose Recessed	Textured White 80303020.TW Textured Silver 80303020.TS Textured Black 80303020.TB
	<b>Ceiling Rose Surface</b> Ceiling Rose Surface	Textured White 80303021.TW Textured Silver 80303021.TS Textured Black 80303021.TB
	<b>Power Cable 0,75</b> Power Cable 1.5m Power Cable 3m Power Cable 5m	ON/Off 80303001 80303002 80303003 DALI Push 80303004 80303005 80303006



CASAMBI - DALI Interface  
CASAMBI - DALI Interface

CASAMBI  
8030-2590