


DESCRIPTION

With this version of the ORIS SLIM PRO COMBI, it is possible to obtain reduced size light lines while spreading simultaneously direct, thus offering greater freedom for those who design the lighting for a space.


MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	220-240V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured Silver, Textured White
CONTROL	DALI / Switch Dim, ON/OFF

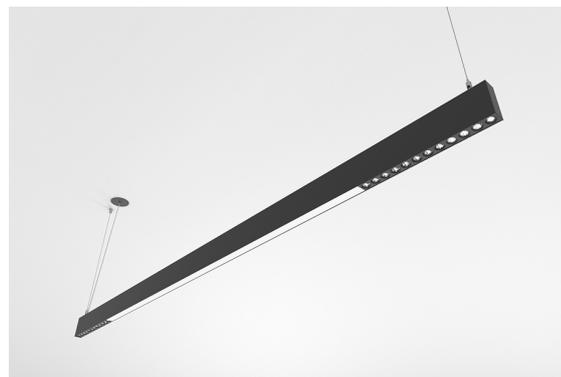

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 153 lm/W
CRI	CRI->90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

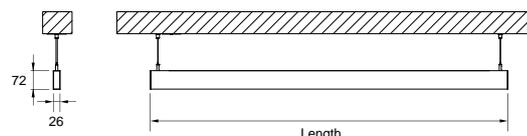

ICONOGRAPHY



ORIS S.P.COMBI OP+L3
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1420	22.9	TB, TS, TW	3000K	DA, NF	3460	2602	482XX.1409.930.FI
1420	22.9	TB, TS, TW	4000K	DA, NF	3460	2602	482XX.1409.940.FI
1700	28	TB, TS, TW	3000K	DA, NF	4248	3135	482XX.1709.930.FI
1700	28	TB, TS, TW	4000K	DA, NF	4248	3135	482XX.1709.940.FI
1980	33.1	TB, TS, TW	3000K	DA, NF	5036	3668	482XX.1909.930.FI
1980	33.1	TB, TS, TW	4000K	DA, NF	5036	3668	482XX.1909.940.FI
2260	38.2	TB, TS, TW	3000K	DA, NF	5824	4199	482XX.2209.930.FI
2260	38.2	TB, TS, TW	4000K	DA, NF	5824	4199	482XX.2209.940.FI
2540	43.4	TB, TS, TW	3000K	DA, NF	6611	4732	482XX.2509.930.FI
2540	43.4	TB, TS, TW	4000K	DA, NF	6611	4732	482XX.2509.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

ACCESSORIES

	Suspension Kit	Silver		
	Suspension kit 1,5m (1un)	80303017.SL		
	Suspension kit 3 m (1un)	80303018.SL		
	Suspension kit 5 m (1un)	80303019.SL		
	Ceiling Rose Recessed	Textured White	Textured Silver	Textured Black
	Ceiling Rose Recessed	80303020.TW	80303020.TS	80303020.TB
	Ceiling Rose Surface	Textured White	Textured Silver	Textured Black
	Ceiling Rose Surface	80303021.TW	80303021.TS	80303021.TB
	Power Cable 0,75	ON/OFF	DALI Push	
	Power Cable 1.5m	80303001	80303004	
	Power Cable 3m	80303002	80303005	

Power Cable 5m

80303003

80303006



CASAMBI - DALI Interface
CASAMBI - DALI Interface

CASAMBI
8030-2590