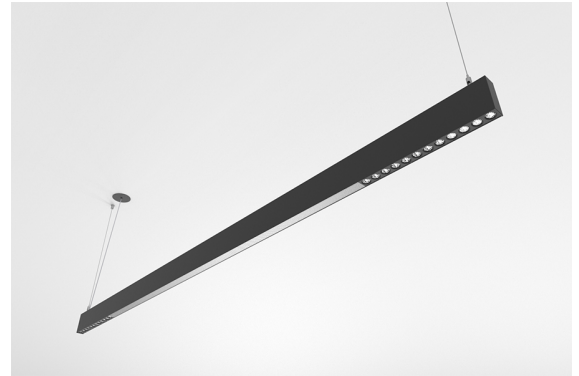


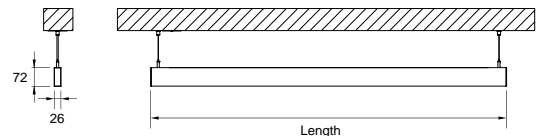

**DESCRIPTION**

With this version of the ORIS SLIM PRO COMBI, it is possible to obtain reduced size light lines while spreading simultaneously direct, thus offering greater freedom for those who design the lighting for a space.

<b>MOUNTING</b>	Suspension
<b>LIGHT DISTRIBUTION</b>	Directa
<b>POWER SUPPLY</b>	220-240V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Anodized aluminium, Textured Black, Textured Silver, Textured White
<b>CONTROL</b>	DALI / PUSH Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 153 lm/W
<b>CRI</b>	CRI->90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**


**ORIS SL. PRO C. D. PR+L3**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1420	22,9	TB, TS, TW	3000K	DA, NF	3460	2203	482XX.14P8.930.FI
1420	22,9	TB, TS, TW	4000K	DA, NF	3460	2203	482XX.14P8.940.FI
1700	28	TB, TS, TW	3000K	DA, NF	4248	2603	482XX.17P8.930.FI
1700	28	TB, TS, TW	4000K	DA, NF	4248	2603	482XX.17P8.940.FI
1980	33,1	TB, TS, TW	3000K	DA, NF	5036	3002	482XX.19P8.930.FI
1980	33,1	TB, TS, TW	4000K	DA, NF	5036	3002	482XX.19P8.940.FI
2260	38,2	TB, TS, TW	3000K	DA, NF	5824	3400	482XX.22P8.930.FI
2260	38,2	TB, TS, TW	4000K	DA, NF	5824	3400	482XX.22P8.940.FI
2540	43,4	TB, TS, TW	3000K	DA, NF	6611	3800	482XX.25P8.930.FI
2540	43,4	TB, TS, TW	4000K	DA, NF	6611	3800	482XX.25P8.940.FI

SELECT YOUR PREFERRED  
 OPTION

CONTROLTYPE	XX
DALI / PUSH Dim	DA
ON/OFF	NF

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Textured Black	TB
Textured Silver	TS
Textured White	TW

**ACCESSORIES**

	<b>Suspension Kit</b> Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)	<b>Silver</b> 80303017.SL 80303018.SL 80303019.SL
	<b>Ceiling Rose Recessed</b> Ceiling Rose Recessed	<b>Textured White</b> <b>Textured Silver</b> <b>Textured Black</b> 80303020.TW   80303020.TS   80303020.TB
	<b>Ceiling Rose Surface</b> Ceiling Rose Surface	<b>Textured White</b> <b>Textured Silver</b> <b>Textured Black</b> 80303021.TW   80303021.TS   80303021.TB
	<b>Power Cable 0,75</b> <b>Power Cable 1.5m</b> <b>Power Cable 3m</b>	<b>ON/OFF</b> <b>DALI Push</b> 80303001   80303004 80303002   80303005

Power Cable 5m

80303003

80303006



CASAMBI - DALI Interface  
CASAMBI - DALI Interface

CASAMBI  
8030-2590