


**DESCRIPTION**

With this version of the ORIS SLIM PRO COMBI, it is possible to obtain reduced size light lines while spreading simultaneously direct, thus offering greater freedom for those who design the lighting for a space.


<b>MOUNTING TYPE</b>	Suspension
<b>LIGHT DISTRIBUTION</b>	Directa
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured Silver, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF

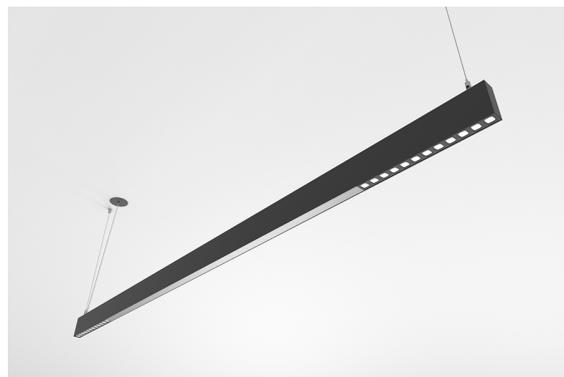


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 200 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

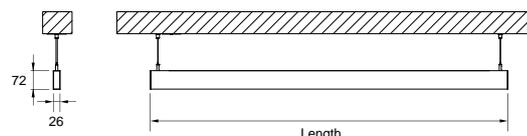

**ICONOGRAPHY**

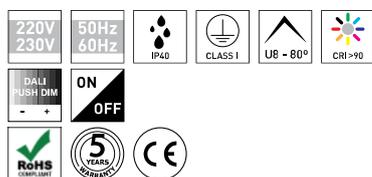

**ORIS S.P.COMBI PR+LG**  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1410	23.9	TB, TS, TW	3000K	DA, NF	4635	4049	5481XX.14P8.930.FI
1410	23.9	TB, TS, TW	4000K	DA, NF	4762	4160	5481XX.14P8.940.FI
1690	29.3	TB, TS, TW	3000K	DA, NF	5686	4963	5481XX.16P8.930.FI
1690	29.3	TB, TS, TW	4000K	DA, NF	5840	5098	5481XX.16P8.940.FI
1970	34.7	TB, TS, TW	3000K	DA, NF	6737	5877	5481XX.19P8.930.FI
1970	34.7	TB, TS, TW	4000K	DA, NF	6918	6036	5481XX.19P8.940.FI
2250	40	TB, TS, TW	3000K	DA, NF	7788	6792	5481XX.22P8.930.FI
2250	40	TB, TS, TW	4000K	DA, NF	7996	6973	5481XX.22P8.940.FI
2530	45.4	TB, TS, TW	3000K	DA, NF	8839	7706	5481XX.25P8.930.FI
2530	45.4	TB, TS, TW	4000K	DA, NF	9074	7911	5481XX.25P8.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

**ACCESSORIES**

	Suspension Kit Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)	Silver 80303017.SL 80303018.SL 80303019.SL
	Ceiling Rose Recessed Ceiling Rose Recessed	Textured White 80303020.TW Textured Silver 80303020.TS Textured Black 80303020.TB
	Ceiling Rose Surface Ceiling Rose Surface	Textured White 80303021.TW Textured Silver 80303021.TS Textured Black 80303021.TB
	Power Cable 0,75 Power Cable 1.5m Power Cable 3m Power Cable 5m	ON/OFF 80303001 80303002 80303003 DALI Push 80303004 80303005 80303006



CASAMBI - DALI Interface  
CASAMBI - DALI Interface

CASAMBI  
8030-2590