

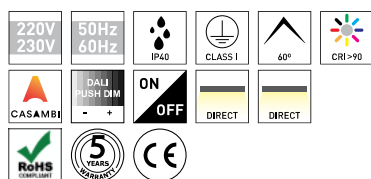
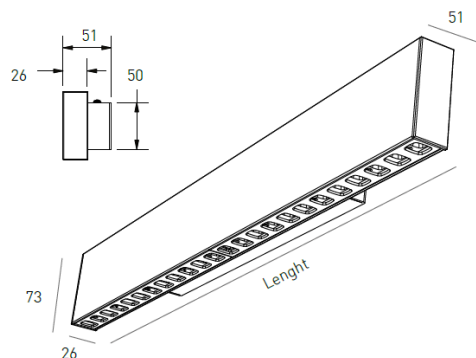
**DESCRIPTION**

The luminaire Oris SlimPro Wall is a complement to the Oris SlimPro range. The reduced dimensions of only 26 mm in width make this luminaire slim and distinctive and a good choice for wall application in refined spaces, where lighting is discreet, but efficient and with a high CRI.

<b>MOUNTING TYPE</b>	Surface
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured Silver, Textured White
<b>CONTROL</b>	CASAMBI, DALI / Switch Dim, ON/OFF

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 195 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**ICONOGRAPHY**

**TECHNICAL DRAWING**

**ORIS LOW GLARE WALL  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
570	7.8	TB, TS, TW	CS, DA, NF	60	1482	1305	3000K	5296XX.05U6.930.FI
570	7.8	TB, TS, TW	CS, DA, NF	60	1529	1347	4000K	5296XX.05U6.940.FI
850	11.8	TB, TS, TW	CS, DA, NF	60	2223	1958	3000K	5296XX.08U6.930.FI
850	11.8	TB, TS, TW	CS, DA, NF	60	2293	2020	4000K	5296XX.08U6.940.FI
1130	15.7	TB, TS, TW	CS, DA, NF	60	2964	2611	3000K	5296XX.11U6.930.FI
1130	15.7	TB, TS, TW	CS, DA, NF	60	3058	2694	4000K	5296XX.11U6.940.FI

**SELECT YOUR PREFERRED  
OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	60°	60
DALI / Switch Dim	DA	Textured Silver	TS		
ON/OFF	NF	Textured White	TW		