

DESCRIPTION

The luminaire Oris SlimPro Wall is a complement to the Oris SlimPro range. The reduced dimensions of only 26 mm in width make this luminaire slim and distinctive and a good choice for wall application in refined spaces, where lighting is discreet, but efficient and with a high CRI.


MOUNTING TYPE	Surface
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured Silver, Textured White
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF

LED FEATURES


LUMINOUS EFFICIENCY	UP TO 195 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1



TECHNICAL DRAWING

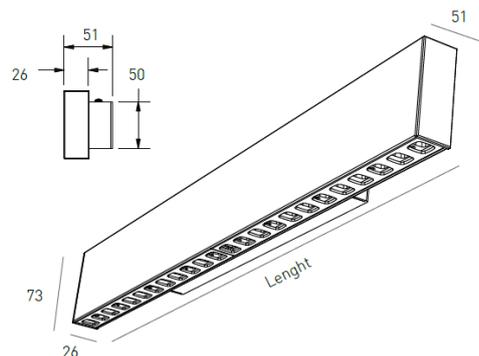

ICONOGRAPHY

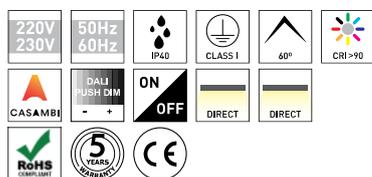

**ORIS LOW GLARE WALL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
570	7.8	TB, TS, TW	CS, DA, NF	60	1482	1305	3000K	5296XX.05U6.930.FI
570	7.8	TB, TS, TW	CS, DA, NF	60	1529	1347	4000K	5296XX.05U6.940.FI
850	11.8	TB, TS, TW	CS, DA, NF	60	2223	1958	3000K	5296XX.08U6.930.FI
850	11.8	TB, TS, TW	CS, DA, NF	60	2293	2020	4000K	5296XX.08U6.940.FI
1130	15.7	TB, TS, TW	CS, DA, NF	60	2964	2611	3000K	5296XX.11U6.930.FI
1130	15.7	TB, TS, TW	CS, DA, NF	60	3058	2694	4000K	5296XX.11U6.940.FI

**SELECT YOUR PREFERRED
OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	60°	60
DALI / Switch Dim	DA	Textured Silver	TS		
ON/OFF	NF	Textured White	TW		