

DESCRIPTION

The luminaire Oris SlimPro Wall is a complement to the Oris SlimPro range. The reduced dimensions of only 26 mm in width make this luminaire slim and distinctive and a good choice for wall application in refined spaces, where lighting is discreet, but efficient and with a high CRI.


|                    |   |
|--------------------|---|
| MOUNTING TYPE      | Surface   |
| LIGHT DISTRIBUTION | Direct  |
| POWER SUPPLY       | 220-230V / 50-60 Hz                             |
| WARRANTY           | 5 Years   |
| FINISHING          | Textured Black, Textured Silver, Textured White |
| CONTROL            | CASAMBI, DALI / Switch Dim, ON/OFF              |

LED FEATURES


|                      |                 |
|----------------------|-----------------|
| LUMINOUS EFFICIENCY  | UP TO 201 lm/W  |
| CRI                  | CRI→90          |
| LIFESPAN             | 50.000 Hours    |
| STEPS MACADAM        | 3 Steps MacAdam |
| LUMEN MAINTENANCE    | L90/B50         |
| PHOTOBIOLOGICAL RISK | RG1             |



TECHNICAL DRAWING

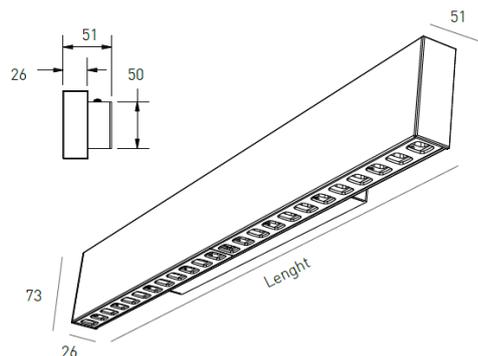

ICONOGRAPHY

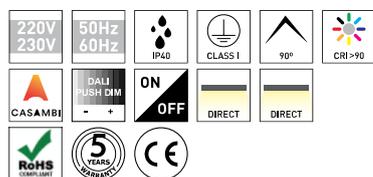

ORIS OPAL + OPAL WALL  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

| LENGTH | POWER | FINISHING  | CONTROL TYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE               |
|--------|-------|------------|--------------|------------|------------|--------------|-------------|--------------------|
| 570    | 21.5  | TB, TS, TW | CS, DA, NF   | 90         | 4204       | 2943         | 3000K       | 5297XX.0509.930.FI |
| 570    | 21.5  | TB, TS, TW | CS, DA, NF   | 90         | 4311       | 3018         | 4000K       | 5297XX.0509.940.FI |
| 850    | 32.2  | TB, TS, TW | CS, DA, NF   | 90         | 6306       | 4414         | 3000K       | 5297XX.0809.930.FI |
| 850    | 32.2  | TB, TS, TW | CS, DA, NF   | 90         | 6467       | 4527         | 4000K       | 5297XX.0809.940.FI |
| 1130   | 42.9  | TB, TS, TW | CS, DA, NF   | 90         | 8408       | 5886         | 3000K       | 5297XX.1109.930.FI |
| 1130   | 42.9  | TB, TS, TW | CS, DA, NF   | 90         | 8623       | 6036         | 4000K       | 5297XX.1109.940.FI |

SELECT YOUR PREFERRED  
OPTION

| CONTROL TYPE      | XX | FINISHING       | FI | BEAM ANGLE | BA |
|-------------------|----|-----------------|----|------------|----|
| CASAMBI           | CS | Textured Black  | TB | 90°        | 90 |
| DALI / Switch Dim | DA | Textured Silver | TS |            |    |
| ON/OFF            | NF | Textured White  | TW |            |    |